[INCH-POUND]
A-A-59326/16
September 25, 1998
SUPERSEDING
MS 70096D
May 15, 1989

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, FEMALE BY EXTERNAL STRAIGHT THREADS, TYPE XVI

(FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

TABLE 1. Coupling half dimensions.

Dash No.	Cam-Lock Nom. Size	Thread	Major Dia A		Pitch Dia B		Minor Dia. C (Max)	Length of Pilot D	Length of Nipple E	Inside Dia. F	Gasket Reqd
			Max	Min	Max	Min					
1*	¾	¾-14NPSH	1.0353	1.0213	0.9889	0.9810	0.9425	.12	.56	.78	-2
2	1	1-11½NPSH	1.2951	1.2781	1.2306	1.2301	1.1821	.16	.56	.88	-3
3	1½	1½-11½NPSH	1.8788	1.8618	1.8223	1.8138	1.7658	.16	.62	1.38	-5
4	2	2-11½NPSH	2.3528	2.3358	2.2963	2.2878	2.2398	.19	.75	1.88	-6
5	2½	2½-8NH	2.8434	2.8212	2.7622	2.7511	2.6810	.25	1.00	2.38	-7
6	3	3-8NH	3.4697	3.4475	3.3885	3.3774	3.3073	.25	1.12	2.88	-8
7	4	4-8NH	4.4683	4.4461	4.3871	4.3760	4.3059	.25	1.12	3.88	-9
8	6	6-8NH	6.5874	6.5800	6.5060	6.4945	6.4244	.25	1.38	5.88	-10

1. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

1.1 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

1.2 Finish. The coupling body shall have a black chemical finish.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, Warren, MI 48397-5000.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

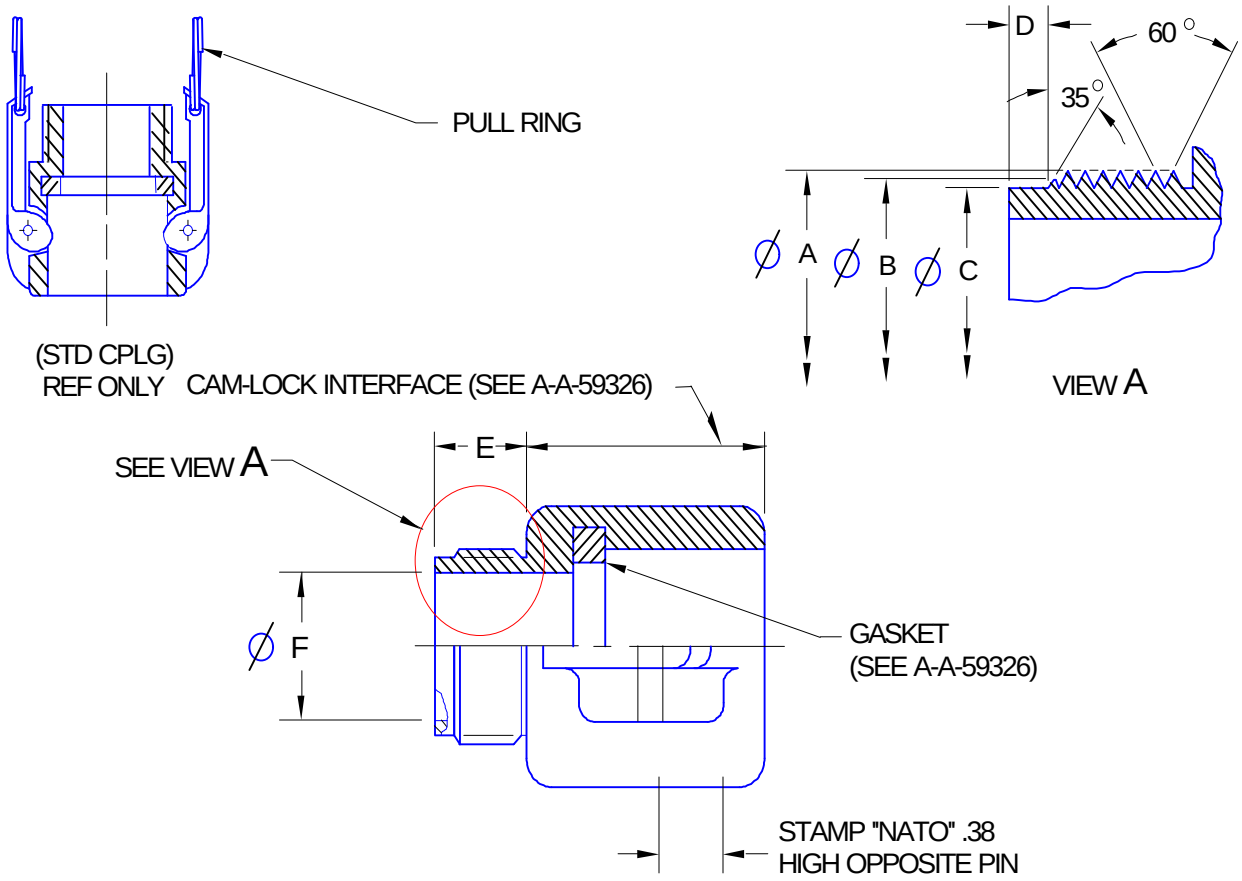

NOTES:1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
2. The size of the coupling assembly shall conform to table 1.
3. Dimensions are in inches; unless otherwise specified hereon, tolerances shall be ± .02 for 2 places, and angles ± ½°.

FIGURE 1. Coupling half.

2. NOTES.

2.1 Part Identification Number (PIN). An example of a PIN to be used for couplings acquired to this specification sheet is: *AA59326XVI11.

2.2 International Standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 82
DLA - CC

Civil Coordinating Activity:
GSA - FSS

Preparing Activity:
Army - AT

(Project 4730-1035-33)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.