INCH-POUND
A-A-59326/16A
May 1, 2003
SUPERSEDING
A-A-59326/16
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

# COUPLING HALF, FEMALE BY EXTERNAL STRAIGHT THREADS, TYPE XVI (FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description specification sheet, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

1. SCOPE. This specification sheet covers a female by external straight threads, type xvi coupling half.

2. CLASSIFICATION. The size of the coupling halves is designated in table I.

TABLE 1. Coupling half dimensions.

| Dash No. | Cam-Lock Nom. Size | Thread | Major Dia A | | Pitch Dia B | | Minor Dia. C (Max) | Length of Pilot D | Length of Nipple E | Inside Dia. F | Gasket Reqd |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Max | Min | Max | Min | | | | | |
| 1 | ¾ | ¾-14NPSH | 1.0353 | 1.0213 | 0.9889 | 0.9810 | 0.9425 | .12 | .56 | .78 | -2 |
| 2 | 1 | 1-11½NPSH | 1.2951 | 1.2781 | 1.2306 | 1.2301 | 1.1821 | .16 | .56 | .88 | -3 |
| 3 | 1½ | 1½-11½NPSH | 1.8788 | 1.8618 | 1.8223 | 1.8138 | 1.7658 | .16 | .62 | 1.38 | -5 |
| 4 | 2 | 2-11½NPSH | 2.3528 | 2.3358 | 2.2963 | 2.2878 | 2.2398 | .19 | .75 | 1.88 | -6 |
| 5 | 2½ | 2½-8NH | 2.8434 | 2.8212 | 2.7622 | 2.7511 | 2.6810 | .25 | 1.00 | 2.38 | -7 |
| 6 | 3 | 3-8NH | 3.4697 | 3.4475 | 3.3885 | 3.3774 | 3.3073 | .25 | 1.12 | 2.88 | -8 |
| 7 | 4 | 4-8NH | 4.4683 | 4.4461 | 4.3871 | 4.3760 | 4.3059 | .25 | 1.12 | 3.88 | -9 |
| 8 | 6 | 6-8NH | 6.5874 | 6.5800 | 6.5060 | 6.4945 | 6.4244 | .25 | 1.38 | 5.88 | -10 |
| Sizes are in Inches | | | | | | | | | | | |

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

3.2 Finish. The coupling body shall have a black chemical finish.

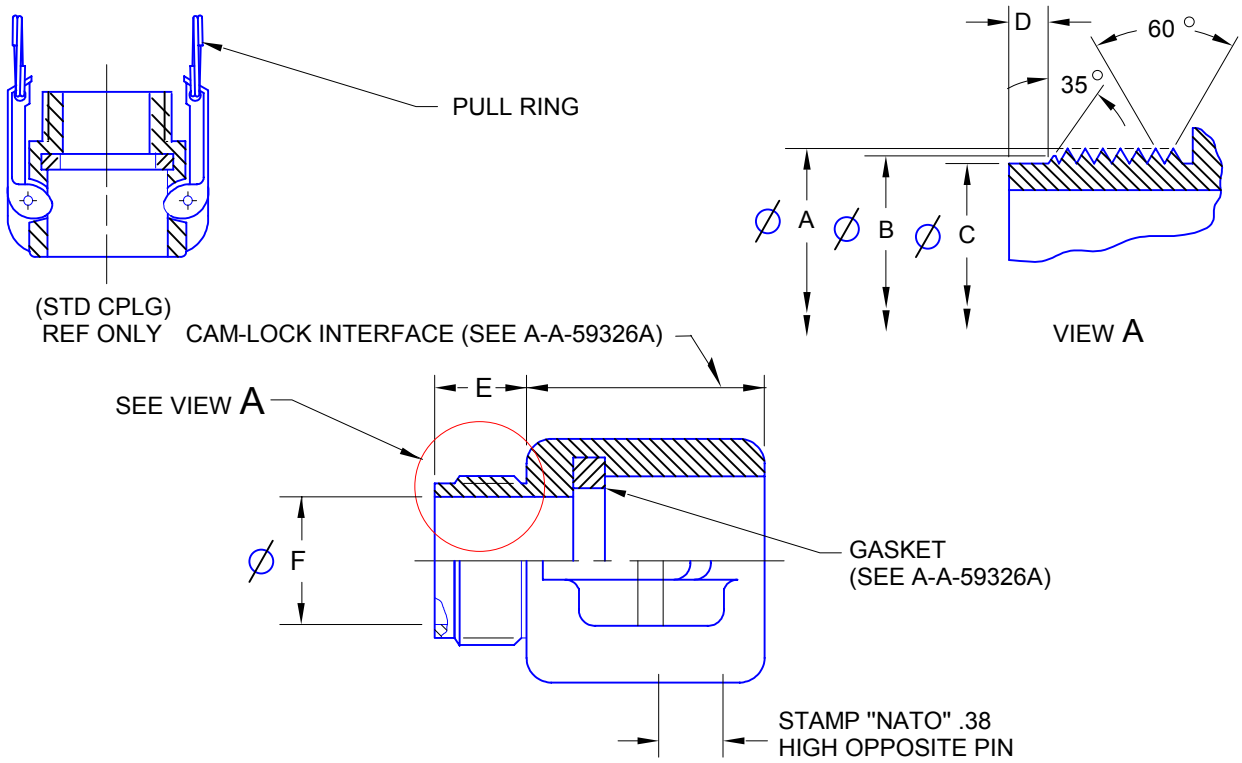


NOTES: 1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
2. The size of the coupling assembly shall conform to table 1.
3. Dimensions are in inches; unless otherwise specified hereon, tolerances shall be ± .02 for 2 places, and angles ± 2°.

FIGURE 1. Coupling half.

4 NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/16A

AA59326/6A-4-SS-1; /16A indicates a Female by External Straight Threads, Type XVI Coupling Half; -4 indicates a 2-inch nominal size; SS indicates a stainless steel body and -1 indicates a style 1 coupling.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms will stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings will incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism will be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326/A).

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-016)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.