INCH-POUND
A-A-59326/16B
April 22, 2011
SUPERSEDING
A-A-59326/16A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

# COUPLING HALF, FEMALE BY EXTERNAL STRAIGHT THREADS, TYPE XVI, (FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification sheet covers a Female by External Straight Threads, Type XVI Coupling Half.

2. CLASSIFICATION. The size of the coupling halves is designated in table I.

TABLE I. Coupling half dimensions.

| Dash No. | Cam-Lock Nom. Size | Thread | Major Dia A | | Pitch Dia B | | Minor Dia. C (Max) | Length of Pilot D | Length of Nipple E | Inside Dia. F | Gasket Reqd |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Max | Min | Max | Min | | | | | |
| 1 | 1 | 1-11½ NPSH | 1.2951 | 1.2781 | 1.2306 | 1.2301 | 1.1821 | .16 | .56 | .88 | -3 |
| 2 | 1½ | 1½-11½ NPSH | 1.8788 | 1.8618 | 1.8223 | 1.8138 | 1.7658 | .16 | .62 | 1.38 | -5 |
| 3 | 2 | 2-11½NPSH | 2.3528 | 2.3358 | 2.2963 | 2.2878 | 2.2398 | .19 | .75 | 1.88 | -6 |
| 4 | 2½ | 2½-8NH | 2.8434 | 2.8212 | 2.7622 | 2.7511 | 2.6810 | .25 | 1.00 | 2.38 | -7 |
| 5 | 3 | 3-8NH | 3.4697 | 3.4475 | 3.3885 | 3.3774 | 3.3073 | .25 | 1.12 | 2.88 | -8 |
| 6 | 4 | 4-8NH | 4.4683 | 4.4461 | 4.3871 | 4.3760 | 4.3059 | .25 | 1.12 | 3.88 | -9 |

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730


Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics may differ from those listed in the latest issue of A-A-59326.

3.1 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

3.2 Finish. The coupling body shall have a black chemical finish.

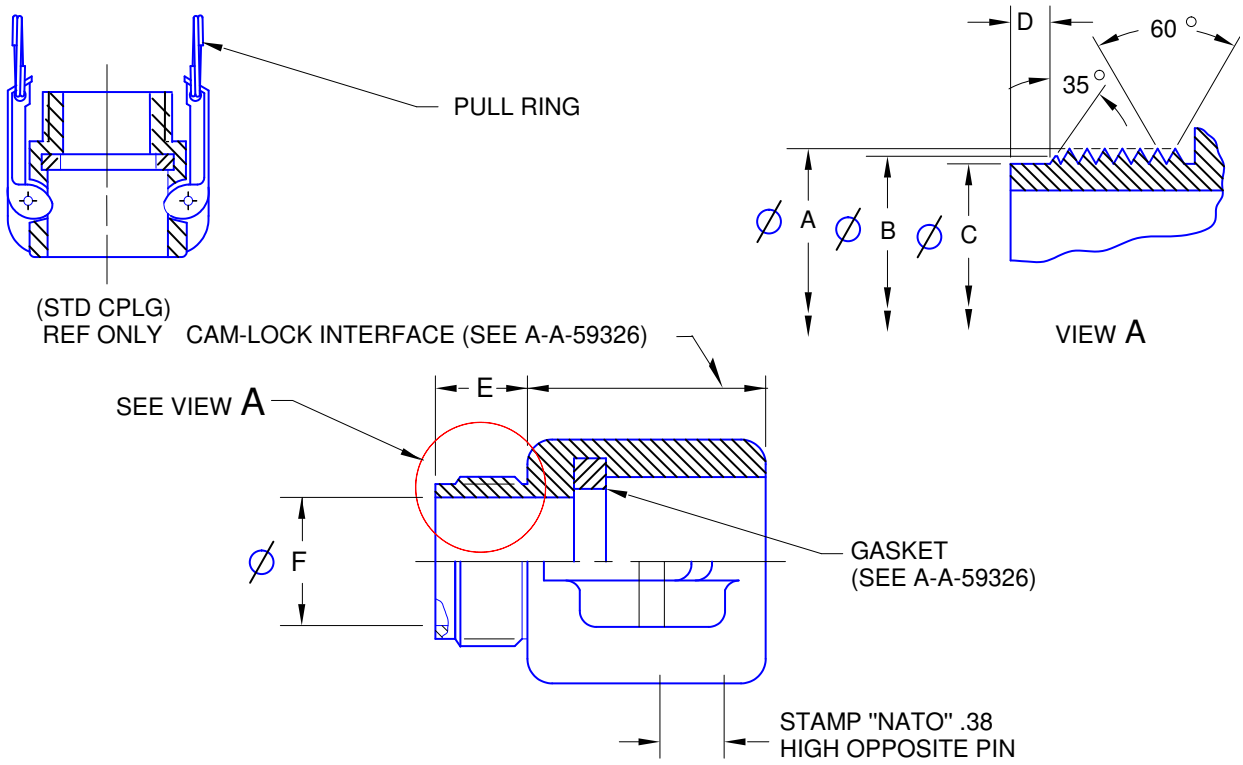


NOTES:
1. For interpretation of dimensioning and tolerancing, see ASME Y14.5M.
2. The size of the coupling assembly shall conform to table I.
3. Dimensions are in inches; unless otherwise specified hereon, tolerances shall be ±.02 for 2 place decimals, and angles ±2°.

FIGURE 1. Coupling half.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/16, latest issue.

AA59326/16-3-SS-1; where /16 indicates a Female by External Straight Threads, Type XVI Coupling Half, -3 indicates a 2-inch nominal size, -SS indicates a stainless steel body and –1 indicates a style 1 coupling.

Material: A - Aluminum Alloy



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms shall stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings shall incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism shall be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.