[INCH-POUND]
A-A-59326/17
September 25, 1998
SUPERSEDING
MS 70095D
May 15, 1989

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY INTERNAL STRAIGHT THREADS, TYPE XVII

(FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

1.1 Accessories. The coupling shall be provided with the gasket indicated.

1.1.1 Gasket. Gaskets shall conform to A-A-59326 except that the dimensions shall conform to table 2.

1.2 Finish. The coupling body shall have a black chemical finish.

2. NOTES.

2.1 Part Identification Number (PIN). An example of a PIN to be used for couplings acquired to this specification sheet is: *AA59326XVII11.

2.2 International Standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, Warren, MI 48397-5000.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

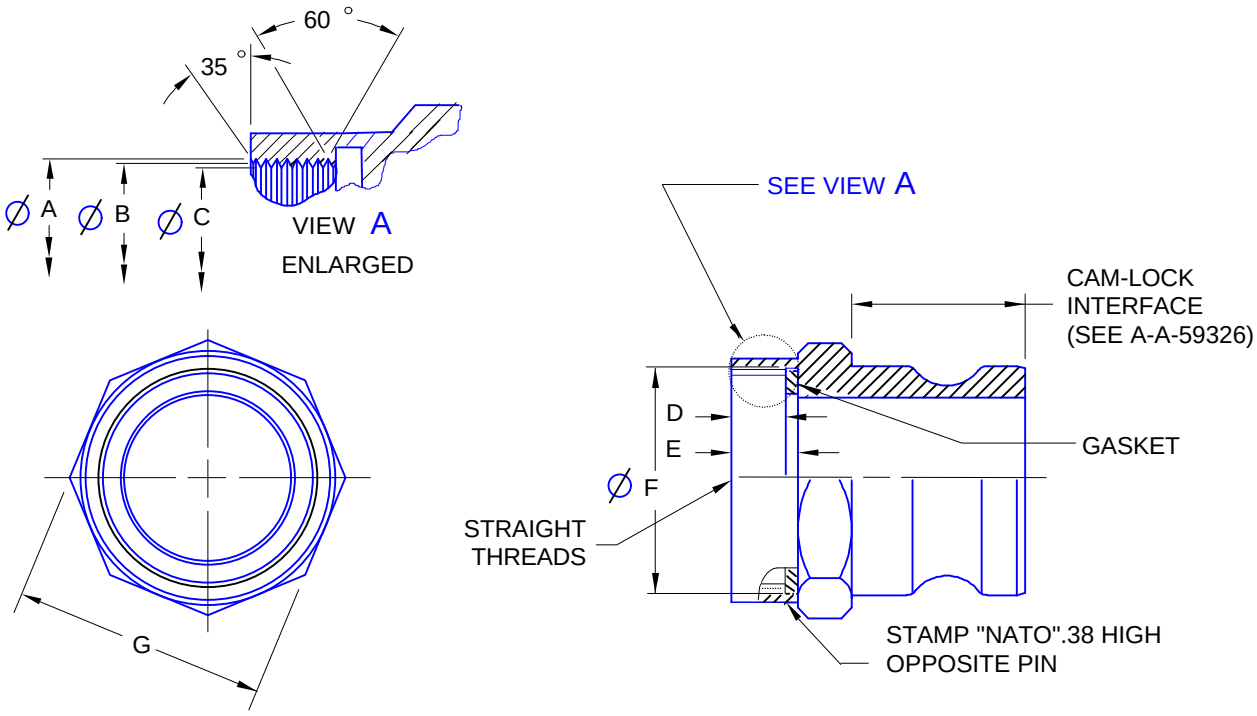

NOTES:1. The size of the coupling assembly shall conform to table 1.

2. Dimensions are in inches; unless otherwise specified, tolerances shall be ± .02 for 2 places, and angles ± ½°.

FIGURE 1. Coupling half.

TABLE 1. Coupling half dimensions.

Dash No.	Cam-Lock Nom Size	Thread	Major Dia A (Min)	Pitch Dia B		Minor Dia C		Thread Length D	Depth E	Groove Dia F	Width Across Flats G
				Max.	Min	Max.	Min		Min		
1*	¾	¾-14NPSH	1.0428	1.0034	0.9964	0.9640	0.9500	.38	.53	1.06	1.38
2	1	1-11½NPSH	1.3051	1.2571	1.2486	1.2091	1.1921	.38	.53	1.34	1.62
3	1½	1½-11½NPSH	1.8888	1.8408	1.8323	1.7928	1.7758	.47	.59	2.06	2.25
4	2	2-11½NPSH	2.3628	2.3148	2.3063	2.2668	2.2498	.59	.72	2.44	2.75
5	2½	2½-8NH	2.8554	2.7853	2.7742	2.7152	2.6930	.69	.94	2.94	3.38
6	3	3-8NH	3.4817	3.4116	3.4005	3.3415	3.3193	.81	1.06	3.56	3.88
7	4	4-8NH	4.4803	4.4102	4.3991	4.3401	4.3179	.81	1.06	4.56	4.88
8	6	6-8NH	6.5435	6.5295	6.5180	6.4531	6.4370	1.19	1.31	6.56	7.72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

TABLE 2. Gasket dimensions.

Coupling Dash No.	O.D. MAX	I.D. MIN	Thickness
-1	1.03	.69	.12
-2	1.28	.94	.12
-3	2.00	1.44	.12
-4	2.38	1.88	.12
-5	3.00	2.44	.12
-6	3.50	2.94	.12
-7	4.50	3.81	.12
-8	6.50	5.88	.12

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 82
DLA - CC

Civil Coordinating Activity:
GSA - FSS

Preparing Activity:
Army - AT
(Project 4730-1035-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.