INCH-POUND
A-A-59326/17A
May 1, 2003
SUPERSEDING
A-A-59326/17
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY INTERNAL STRAIGHT THREADS, TYPE XVII (FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description specification sheet, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

1. SCOPE. This specification covers a male by internal straight threads, type XVII coupling half.

2. CLASSIFICATION. The size of the coupling halves is designated in table 1.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Accessories. The coupling shall be provided with the gasket indicated.

3.1.1 Gasket. Gaskets shall conform to A-A-59326A except that the dimensions shall conform to table 2.


3.2 Finish. The coupling body shall have a black chemical finish.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

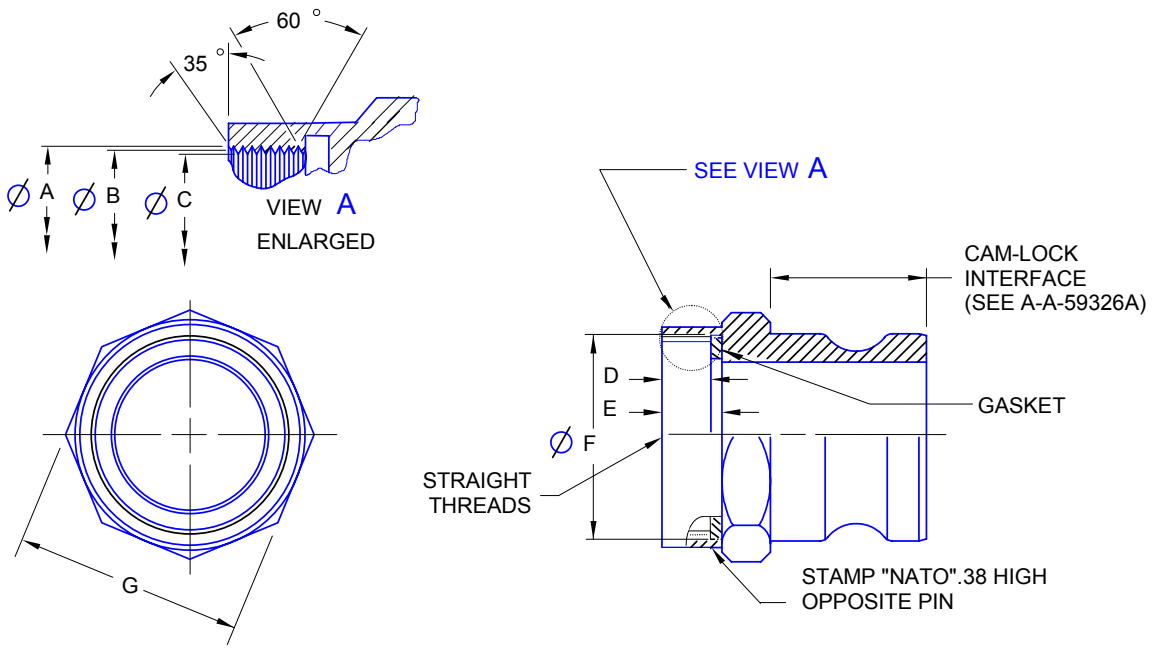

NOTES: 1. The size of the coupling assembly shall conform to table 1.
2. Dimensions are in inches; unless otherwise specified, tolerances shall be ± .02 for 2 places, and angles ± ½°.

FIGURE 1. Coupling half.

TABLE 1. Coupling half dimensions.

Dash No.	Cam-Lock Nom Size	Thread	Major Dia A (Min)	Pitch Dia B		Minor Dia C		Thread Length D	Depth E Min	Groove Dia F	Width Across Flats G
				Max.	Min	Max.	Min				
1	¾	¾-14NPSH	1.0428	1.0034	0.9964	0.9640	0.9500	.38	.53	1.06	1.38
2	1	1-11½NPSH	1.3051	1.2571	1.2486	1.2091	1.1921	.38	.53	1.34	1.62
3	1½	1½-11½NPSH	1.8888	1.8408	1.8323	1.7928	1.7758	.47	.59	2.06	2.25
4	2	2-11½NPSH	2.3628	2.3148	2.3063	2.2668	2.2498	.59	.72	2.44	2.75
5	2½	2½-8NH	2.8554	2.7853	2.7742	2.7152	2.6930	.69	.94	2.94	3.38
6	3	3-8NH	3.4817	3.4116	3.4005	3.3415	3.3193	.81	1.06	3.56	3.88
7	4	4-8NH	4.4803	4.4102	4.3991	4.3401	4.3179	.81	1.06	4.56	4.88
8	6	6-8NH	6.5435	6.5295	6.5180	6.4531	6.4370	1.19	1.31	6.56	7.72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

TABLE 2. Gasket dimensions.

Coupling Dash No.	O.D. MAX	I.D. MIN	Thickness
-1	1.03	.69	.12
-2	1.28	.94	.12
-3	2.00	1.44	.12
-4	2.38	1.88	.12
-5	3.00	2.44	.12
-6	3.50	2.94	.12
-7	4.50	3.81	.12
-8	6.50	5.88	.12

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/17A.

AA59326/16A-5-A; /16A indicates a Male by Internal Straight Thread Type XVII Coupling Half; -5 indicates a 2 ½ nominal size; and A indicates an Aluminum body.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-017)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.