INCH-POUND
A-A-59326/17B
April 22, 2011
SUPERSEDING
A-A-59326/17A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY INTERNAL STRAIGHT THREADS, TYPE XVII (FOR USE WITH NATO EQUIPMENT)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification sheet covers a Male by Internal Straight Threads, Type XVII Coupling Half.

2. CLASSIFICATION. The size of the coupling halves is designated in table I.

3. SALIENT CHARACTERISTICS. The following characteristics may differ from those listed in the latest issue of A-A-59326.

3.1 Accessories. The coupling shall be provided with the gasket indicated.

3.1.1 Gasket. Gaskets shall conform to A-A-59326, latest issue in effect, except that the dimensions shall conform to table II.

3.2 Finish. The coupling body shall have a black chemical finish.


3.3 Threads. NH and NPSH threads shall be in accordance with ANSI/ASME B1.20.7.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

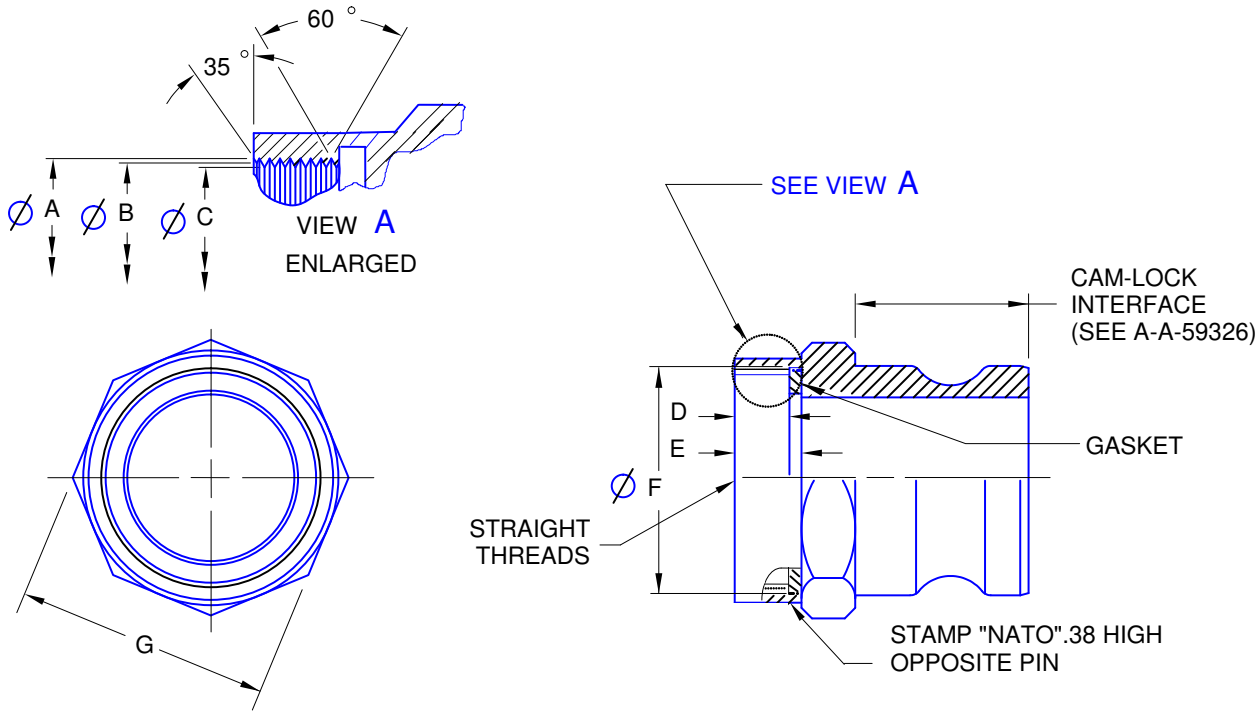

NOTES: 1. The size of the coupling assembly shall conform to table I.
2. Dimensions are in inches; unless otherwise specified, tolerances shall be ±.02 for 2 place decimals, and for angles ±½°.

FIGURE 1. Coupling half.

TABLE I. Coupling half dimensions.

Dash No.	Cam-Lock Nom Size	Thread	Major Dia A (Min)	Pitch Dia B		Minor Dia C		Thread Length D	Depth E Min	Groove Dia F	Width Across Flats G
				Max.	Min	Max.	Min				
1	1	1-11½NPSH	1.3051	1.2571	1.2486	1.2091	1.1921	.38	.53	1.34	1.62
2	1½	1½-11½NPSH	1.8888	1.8408	1.8323	1.7928	1.7758	.47	.59	2.06	2.25
3	2	2-11½NPSH	2.3628	2.3148	2.3063	2.2668	2.2498	.59	.72	2.44	2.75
4	2½	2½-8NH	2.8554	2.7853	2.7742	2.7152	2.6930	.69	.94	2.94	3.38
5	3	3-8NH	3.4817	3.4116	3.4005	3.3415	3.3193	.81	1.06	3.56	3.88
6	4	4-8NH	4.4803	4.4102	4.3991	4.3401	4.3179	.81	1.06	4.56	4.88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

TABLE II. Gasket dimensions.

Coupling Dash No.	O.D. MAX	I.D. MIN	Thickness
-2	1.28	.94	.12
-3	2.00	1.44	.12
-4	2.38	1.88	.12
-5	3.00	2.44	.12
-6	3.50	2.94	.12
-7	4.50	3.81	.12

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/17.

AA59326/17-4-A; where /17 indicates a Male by Internal Straight Thread Type XVII coupling half, -4 indicates a 2 ½ nominal size and A indicates an Aluminum body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-029)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.