INCH-POUND
A-A-59326/19B
April 22, 2011
SUPERSEDING
A-A-59326/19A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, NIPPLE ADAPTER, MALE BY EXTERNAL GROOVED PIPE, TYPE XIX

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

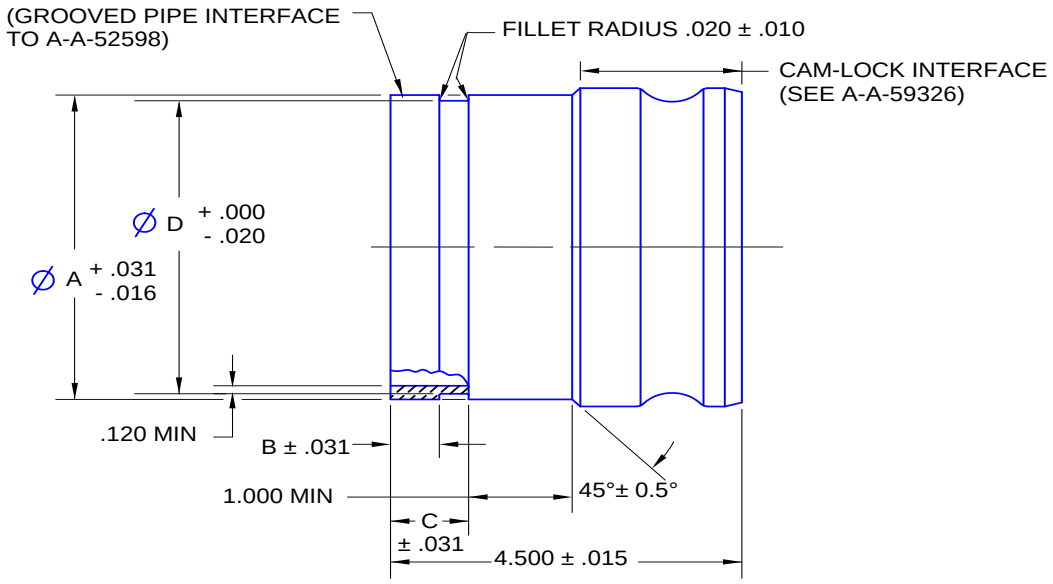

FIGURE 1. Coupling half.

NOTES: 1. For interpretation of dimensioning and tolerancing, see ASME Y14.5M.
2. Dimensions are in inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

1. SCOPE. This specification sheet covers a Nipple Adapter, Male by External Grooved Pipe, Type XIX Coupling Half.

2. CLASSIFICATION. The size of the coupling halves is designated in table I.

TABLE I. Coupling half dimensions.

Dash No.	Cam-Lock Nom. Size	Pipe Groove Dimensions			
		A	B	C	D
1	4	4.500	0.625	1.000	4.334
2	6	6.625	0.625	1.000	6.455

3. SALIENT CHARACTERISTICS. Salient Characteristics are identified in the latest issue of A-A-59326. Following characteristics may differ from that mentioned in A-A-59326

3.1 Working Pressure. Both 4-inch and 6-inch cam-locking type adapters shall be rated 150 psi.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/19.

AA59326/19-1-SS; where /19 indicates a Nipple Adapter, Male by External Grooved Type XIX Coupling Half, -1 indicates a 4-inch nominal size, -SS indicates stainless steel body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-031)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.