INCH-POUND
A-A-59326/20B
April 22, 2011
SUPERSEDING
A-A-59326/20A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

Y CONNECTION, FLANGED, TYPE XX

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification covers a Y Connection, Flanged, Type XX, wye fitting used in conjunction with flanged (TTMA) cam locking type couplings.

2. CLASSIFICATION. The sizes of the wye (Y) Connection are identified in table I.

TABLE I. Y connection dimensions.


Dash	Flange Nominal Sizes			Y Dimensions			
No.	A	B	C	D		E	
				Min	Max	Min	Max
1	6	6	6	6.12	9.00	3.50	5.00
2	4	4	4	4.25	6.00	2.25	3.50
3	3	3	3	4.00	5.00	2.12	3.00
4	2	2	2	3.00	4.00	2.00	3.00

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

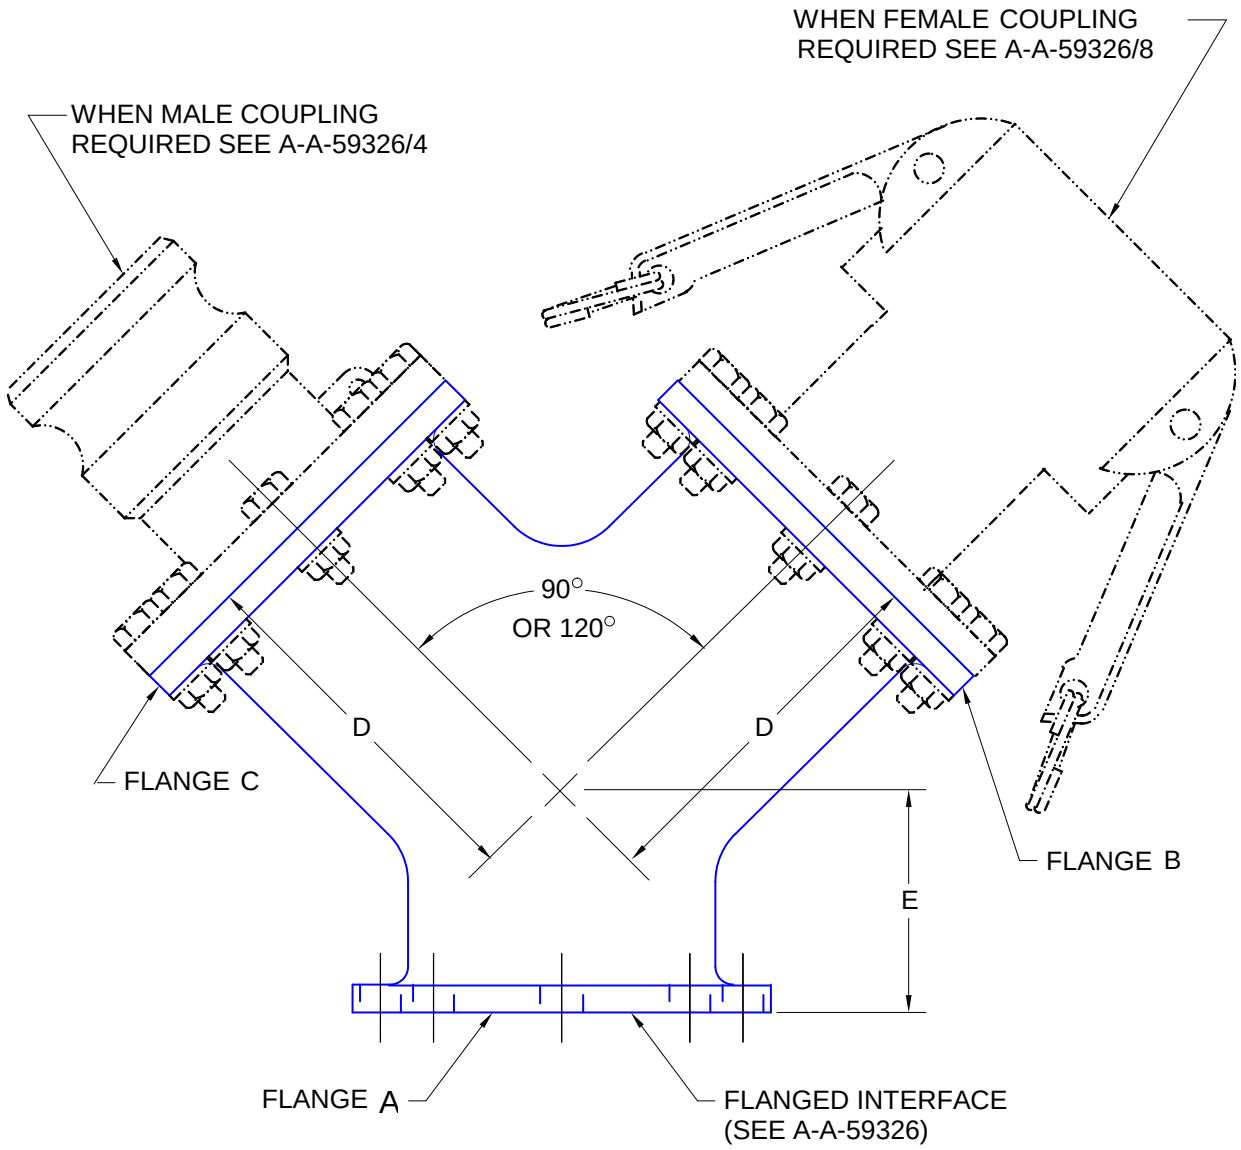

NOTES: 1. Size of the coupling shall conform to table I.
2. Dimensions are in inches; unless otherwise specified, tolerances shall be ±.02 for 2 place decimals, and angles ±2°.

FIGURE 1. Y connection.

3. SALIENT CHARACTERISTICS: The Salient Characteristics shall be as identified in the latest issue of A-A-59326.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/20.

AA59326/20-3-A; where /20 indicates a Flanged Type XX, Y Connection; -3 indicates a 3-inch nominal flange (TTMA) size; and -A indicates an Aluminum Alloy body.

Material: A-Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-036)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.