
INCH-POUND
A-A-59326/21A
May 1, 2003
SUPERSEDING
A-A-59326/21A
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

ADAPTER, MALE BY MALE, CAM LOCKING TYPE, TYPE XXI

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

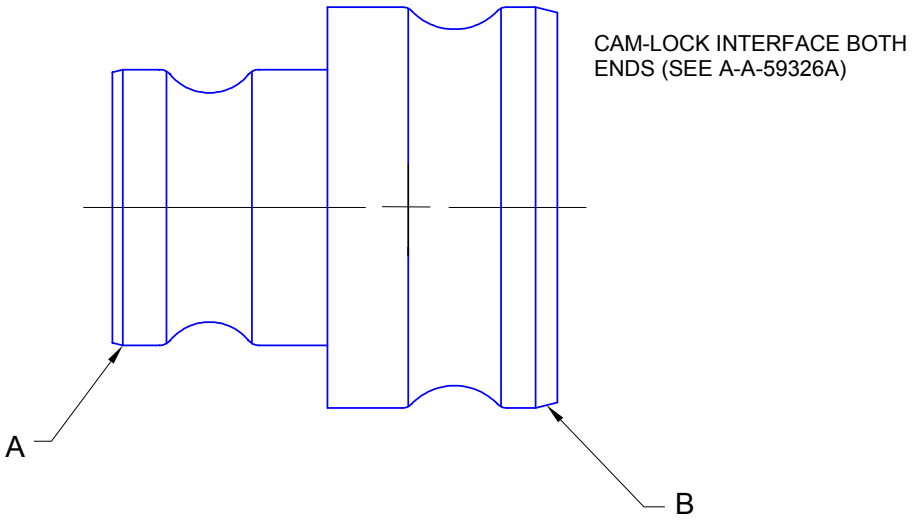

NOTES: 1. The size of the adapter shall conform to table 1.
2. Dimensions are in inches.

FIGURE 1. Adapter.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

TABLE 1. Adapter dimensions.

Dash	Cam-Lock Nom. Size	
No.	A	B
1	1½	1½
2	1½	2
3	1½	3
4	1½	4
5	2	2
6	2	3
7	2	4
8	3	3
9	3	4
10	4	4
11	6	6

1. SCOPE. This specification covers a Male x Male, Type XXI, reducer to be used with Female Cam Locking Coupling Ends.

2. CLASSIFICATION. The size of the Y adapter is designated in table 1.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Hydrostatic test pressure. The 1 ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working pressure. The 1 ½-inch and 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/21A.

AA59326/21A-6-SS; /6A indicates a Male x Male Cam Locking Type
XXI Adapter; -6 indicates a 2-inch by 4-inch reducer; SS indicates stainless steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

Material: A – Aluminum
B – Copper Alloy (Brass or Bronze)
BA – Aluminum Bronze
SS – Stainless Steel

4.2 International Standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Custodians:
Army - AT
Navy - YD
Air Force – 99

Preparing Activity:
Army - AT

(Project 4730-2029-021)

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.