INCH-POUND
A-A-59326/22
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

ADAPTER, FEMALE BY FEMALE, CAM LOCKING TYPE, TYPE XXII

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification covers a Female x Female, Type XXII, adapter to be used with Male Cam Locking Coupling Ends.

2. CLASSIFICATION. The size of the Female x Female adapter is designated in table 1.

TABLE 1. Adapter dimensions.

| Dash No. | Cam-Lock Nom. Size | | Dim 'A' (min) |
|---|---|---|---|
| | End A. | End B | |
| 1 | 3 | 3 | 6.0 |
| 2 | 3 | 4 | 6.0 |
| 3 | 4 | 4 | 6.0 |
| 4 | 4 | 6 | 7.5 |
| 5 | 6 | 6 | 7.5 |

Sizes are in inches

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

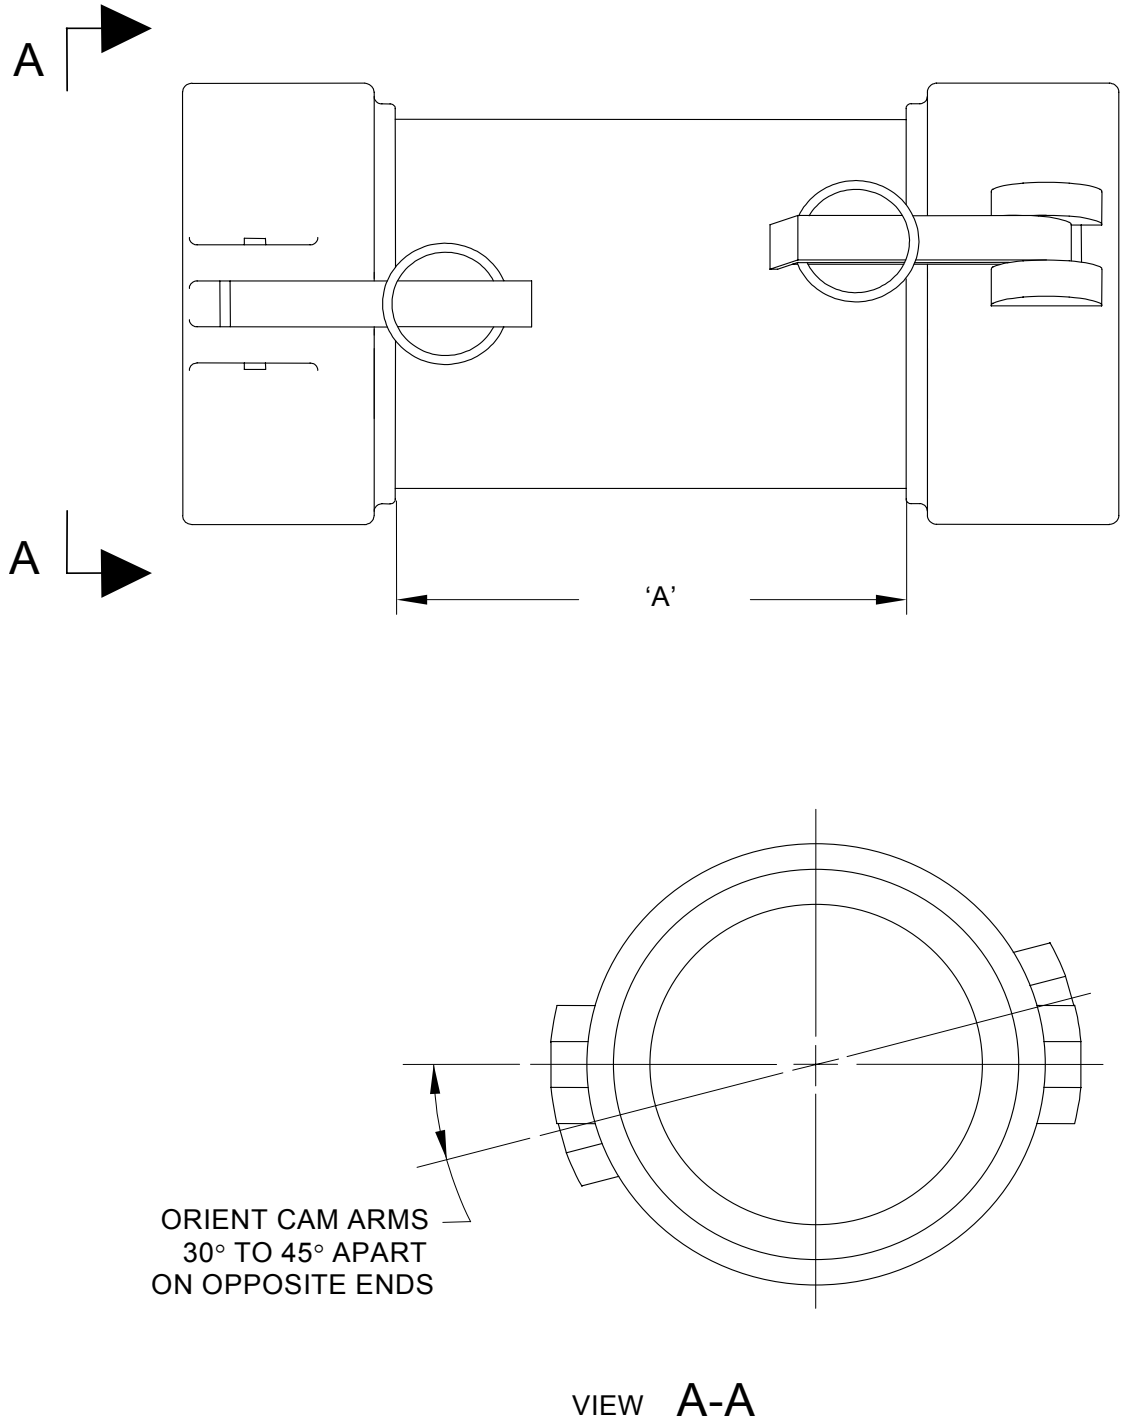



FIGURE 1. Adapter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Hydrostatic test pressure. The 3-inch and 4-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig. The 6-inch, 150 psi rated couplings shall withstand a hydrostatic test pressure of 225 psi without any leakage.

3.2 Working pressure. The 3-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/22.

AA59326/22-1-SS; /22 indicates a Female x Female Cam Locking Type XXII Adapter:
-1 indicates a 3-inch by 3-inch reducer; SS indicates stainless steel.

Material: A – Aluminum
B – Copper Alloy (Brass or Bronze)
BA – Aluminum Bronze
SS – Stainless Steel

4.2 International Standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-022)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.