INCH-POUND
A-A-59326/22A
April 22, 2011
SUPERSEDING
A-A-59326/22
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

ADAPTER, FEMALE BY FEMALE, CAM LOCKING TYPE, TYPE XXII

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification covers a Female x Female, Type XXII, Cam Locking Type Adapter or reducing coupler to be used with Male Cam Locking Coupling Half.

2. CLASSIFICATION. The size of the Female x Female adapters or reducers is designated in table I.

TABLE I. Adapter dimensions.

Dash No.	Cam-Lock Nom. Size		Dim 'A' (Reference)
	End A	End B	
1	3	3	6.0
2	3	4	6.0
3	4	4	6.0
4	4	6	7.5
5	6	6	7.5

NOTE: Sizes are in inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

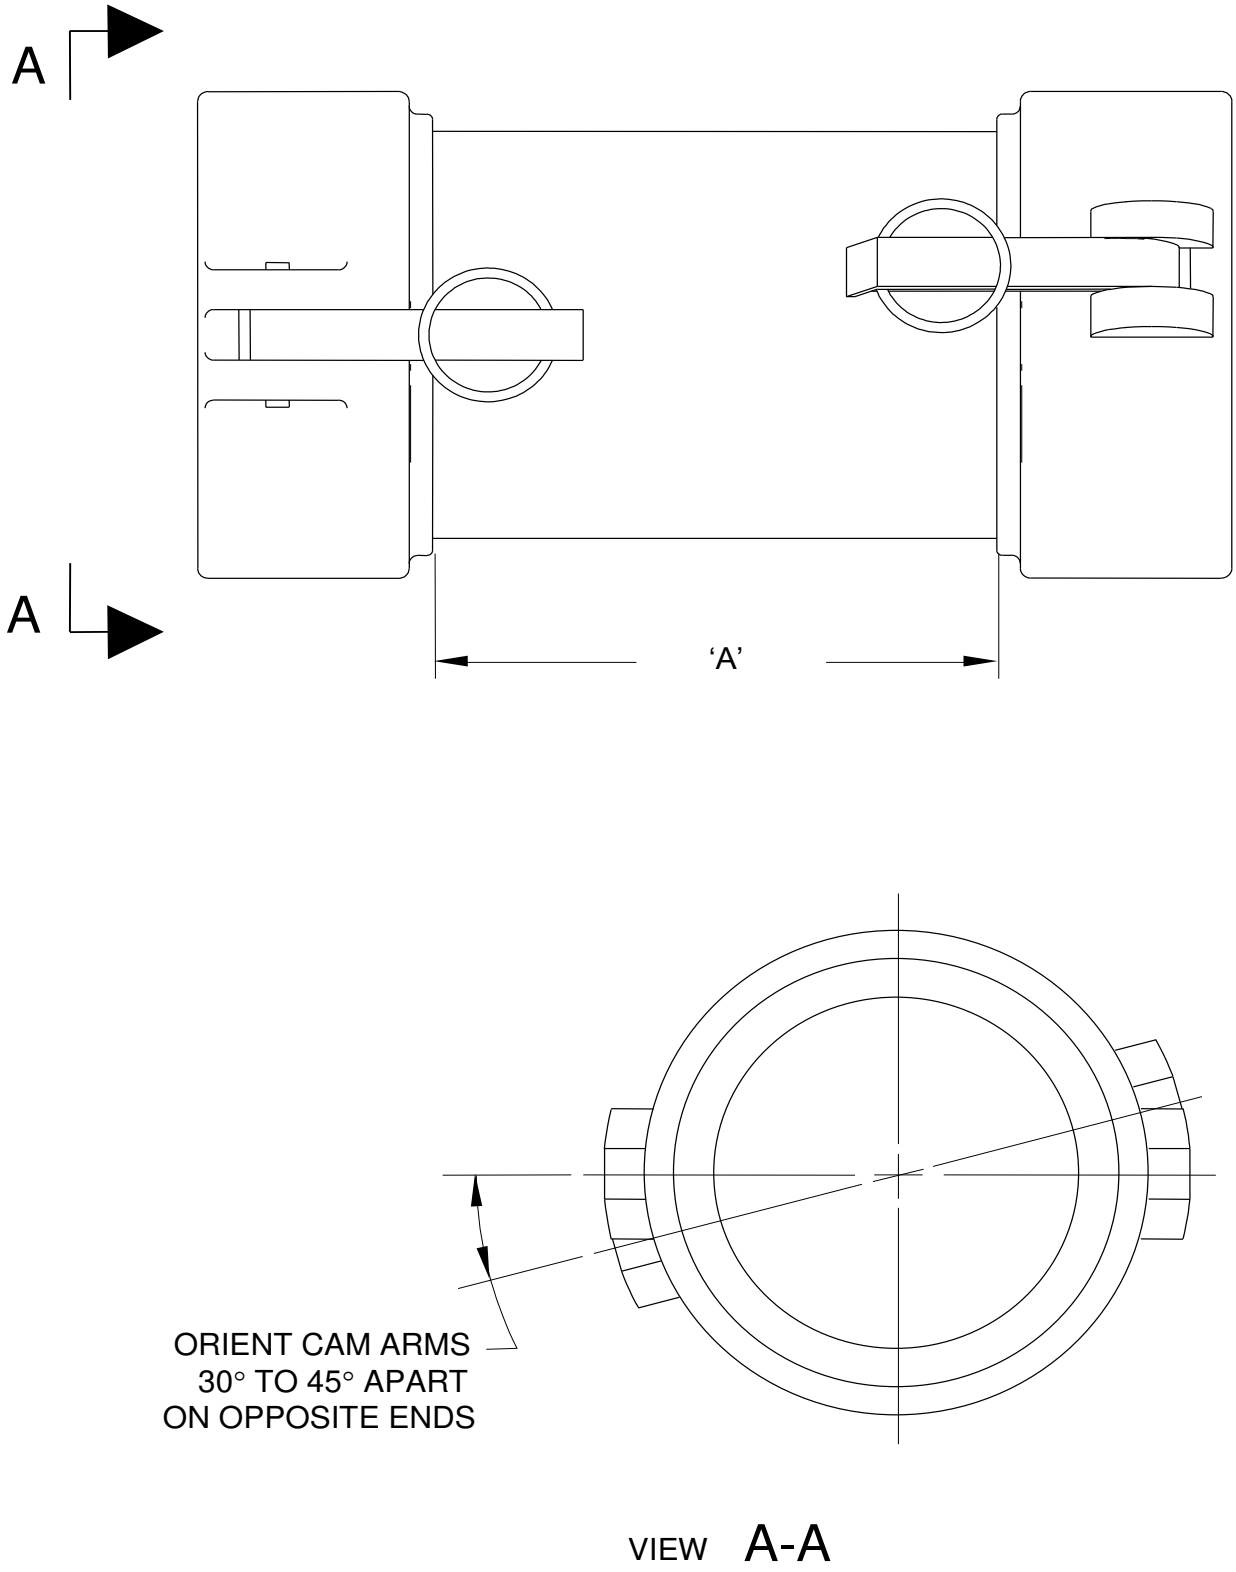


FIGURE 1. Adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in the latest issue of A-A-59326.

3.1 Cam-arms. The 6-inch female cam-locking end for 150 psi rated coupling half shall have 4 (four) cam arms.

3.2 Hydrostatic test pressure. The 3-inch and 4-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig. The 6-inch, 150 psi rated couplings shall withstand a hydrostatic test pressure of 225 psi without any leakage.

3.3 Working pressure. The 3-inch through 4-inch couplings shall be rated at 150 psi (pounds per square inch) working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/22.

AA59326/22-1-A; where /22 indicates a Female x Female Cam Locking Type Adapter or Reducer, -1 indicates a 3-inch by 3-inch Adapter (Coupler); -A indicates Aluminum body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-033)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.