INCH-POUND
A-A-59326/22B
12 May 2014
SUPERSEDING
A-A-59326/22A
April 22, 2011

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

ADAPTER, FEMALE BY FEMALE, CAM LOCKING TYPE, TYPE XXII

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE: This specification covers a Female x Female, Type XXII, Cam Locking Type Adapter to be used with Male Cam Locking Coupling Half.

2. CLASSIFICATION: The size of the Female x Female adapter is designated in Table 1.

TABLE 1. Adapter dimensions.

Dash No.	Cam-Lock Nom. Size		Dim 'A' (Reference)	Working Pressure (psi)	Hydrostatic Test Pressure (psi)
	End A.	End B			
1	3	3	6.0	150	300
2	3	4	6.0	150	300
3	4	4	6.0	150	300
4	4	6	7.5	75	150
5	6	6	7.5	75	150
6	4	6	7.5 min	150	225
7	6	6	7.5 min	150	225

NOTE: Sizes are in inches.

Comments, suggestions, or questions on this document should be addressed to Tank-automotive and Armaments Command, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.rdecom.mail.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

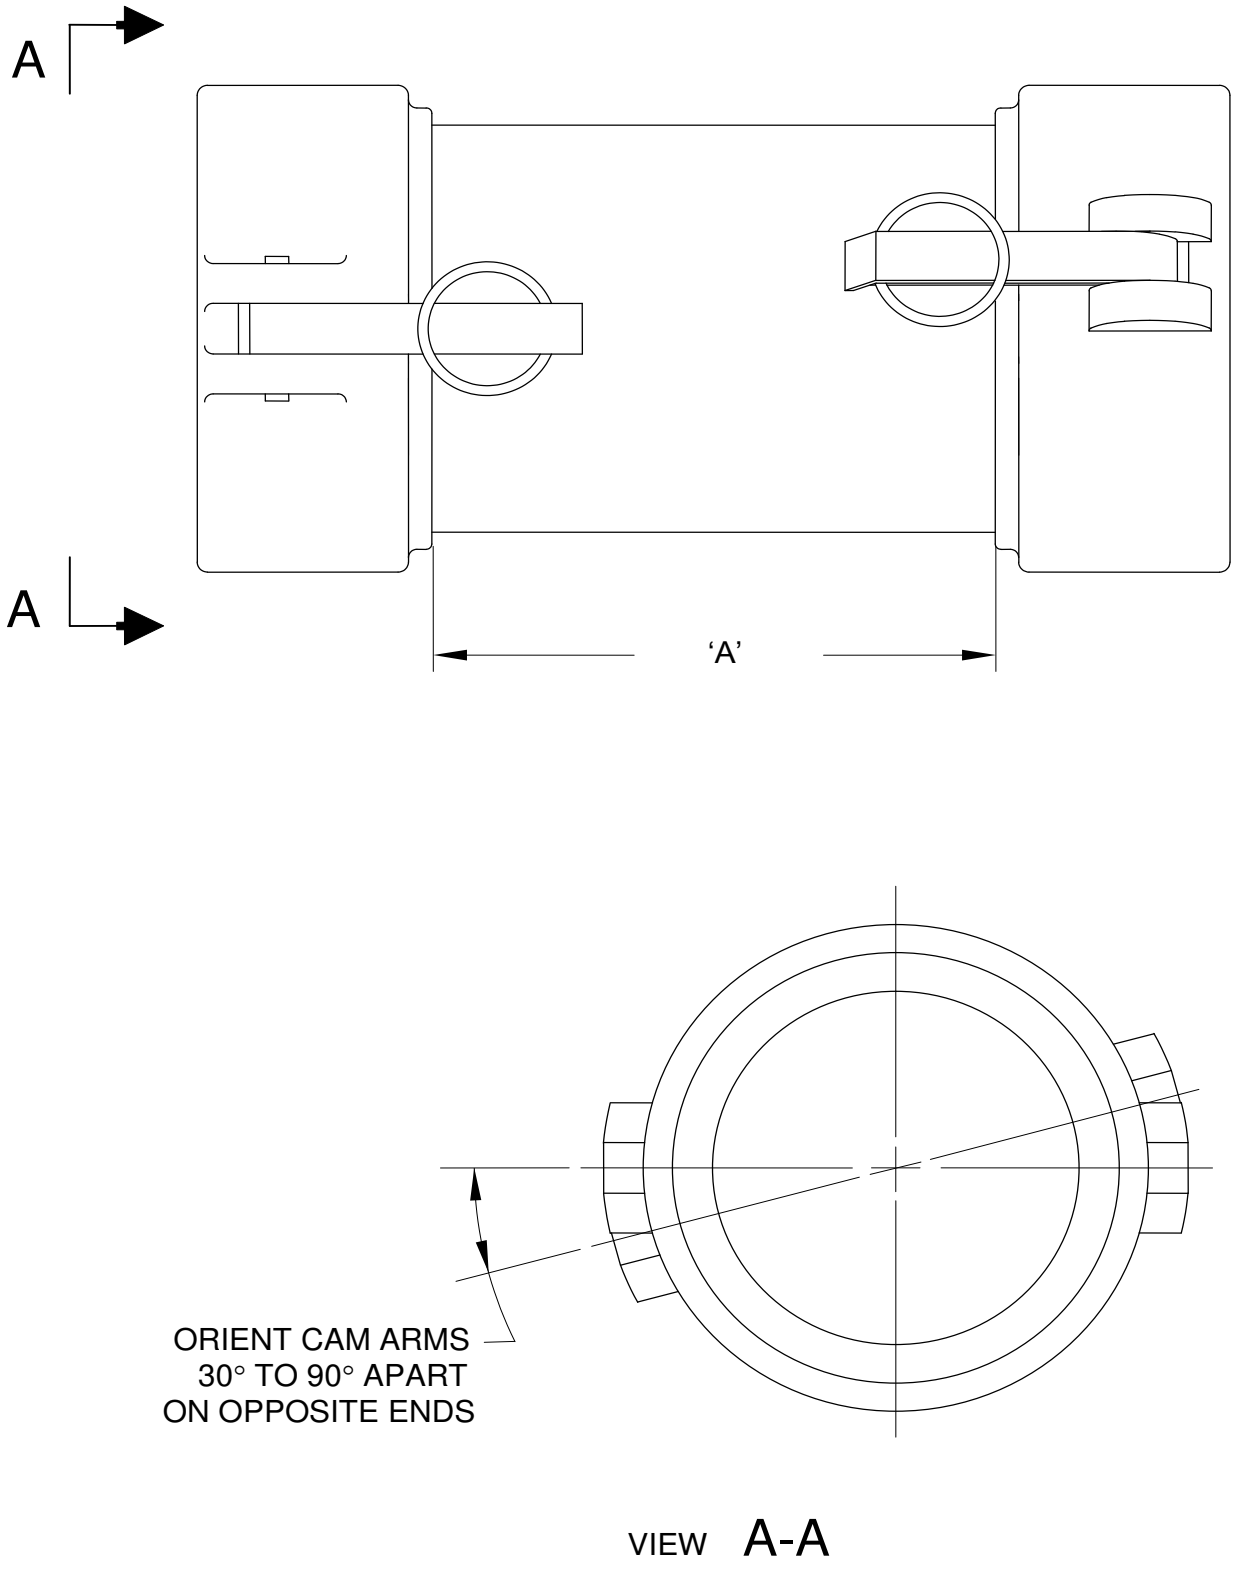


FIGURE 1. Adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

3.1. Hydrostatic test pressure. See Table 1.

3.2. Working pressure. See Table 1.

3.3. Number of Cam Arms. The dash 1 (one) through dash 5 (five) couplings shall have two cam arms. The 6-inch end of the dash 6 (six) coupling, 150 psi working pressure, shall have 4 (four) cam arms. The 6-inch dash 7 (seven) coupling, 150 psi working pressure, shall have 4 (four) cam arms on both ends.

3.4. Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/22.

AA59326/22-1-A; where /22 indicates a Female x Female Cam Locking Type Adapter or Reducer; -1 indicates a 3-inch by 3-inch Adapter (Coupler); and -A indicates Aluminum body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATION ACTIVITY:
GSA-FAS

Preparing Activity:
Army - AT

(Project 4730-2014-046)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.