
INCH-POUND
A-A-59326/23A
12 May 2014
SUPERSIDING
A-A-59326/23
April 22, 2011

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

# COUPLING HALF, NIPPLE ADAPTER, FEMALE BY EXTERNAL GROOVE PIPE, TYPE XXIII

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

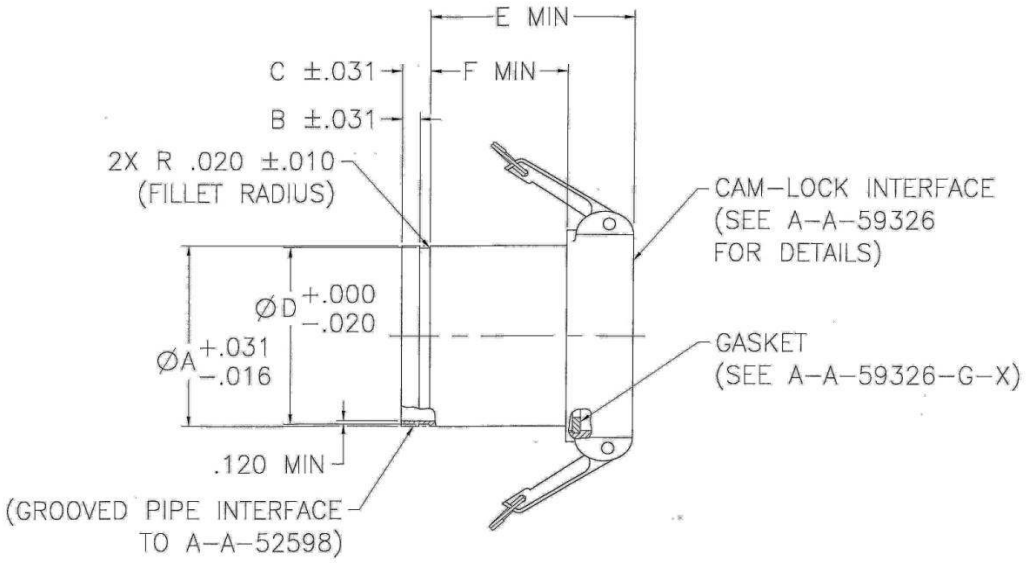


NOTES: 1. For interpretation of dimensioning and tolerancing, see ASME Y14.5M.
2. Dimensions are in inches.

FIGURE 1. Coupling Half

Comments, suggestions, or questions on this document should be addressed to Tank-automotive and Armaments Command, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.rdecom.mail.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

1. SCOPE. This specification sheet covers a Nipple Adapter, Female by External Grooved Pipe, Type XXIII coupling half.

2. CLASSIFICATION. The size of the coupling halves is designated in Table I.

TABLE 1. Adapter dimensions.

| Dash No. | Cam-Lock Nom Size | Pipe Groove Dimensions | | | | Distance of Cam-Lock Interface | | Working Pressure (psi) | Hydrostatic Test Pressure (psi) |
|---|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | F | | |
| -1 | 6 | 6.625 | 0.625 | 1.000 | 6.445 | 7.00 | 4.750 | 75 | 150 |
| -2 | 4 | 4.500 | 0.625 | 1.000 | 4.334 | 6.000 | 3.750 | 150 | 300 |
| -3 | 6 | 6.625 | 0.625 | 1.000 | 6.445 | 7.00 | 4.750 | 150 | 225 |

Notes: Dimensions and sizes are in inches.

3. SALIENT CHARACTERISTICS. Salient characteristics are identified in the latest revision of A-A-59326.

3.1 Hydrostatic test pressure. See Table 1

3.2 Working pressure. See Table 1

3.3 Number of Cam Arms. Dash number 1 (one) and 2 (two) couplings shall have two cam arms. Dash number 3 (three) coupling, 6-inch, 150 psi working pressure, shall have 4 (four) cam arms.

4. NOTES

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/23.

AA59326/23-2-A; where /23indicates a Nipple Adapter, Female by External Grooved Pipe, Type XXIII Coupling Half; -2 indicates a 4-inch nominal size; -A indicates Aluminum body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)
SS - Stainless Steel



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATION ACTIVITY:
GSA-FAS

Preparing Activity:
Army - AT

(Project 4730-2014-047)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.