INCH-POUND
A-A-59326/9A
May 1, 2003
SUPERSEDING
A-A-59326/9
September 25, 1998

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, FEMALE BY FLANGE, HEXAGON, TYPE VIIIA, (FOR D-1 NOZZLE)

The General Services Administration has authorized the use of this commercial item description specification sheet, for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326A.

1. SCOPE. This specification covers a Female by Flange Hexagon Coupling Half, Type VIIIA to be used in conjunction with a D-1 Nozzle.

2. CLASSIFICATION. The size of the coupling halves is designated in table 1.

TABLE 1. Coupling half size.


Dash Number	Cam-Lock Nom. Size	Dim. A	Gasket Required
1	1 ½	1.50	-5
2	2	2.00	-6
3	2 ½	2.50	-7
4	3	2.50	-8
5	4	2.50	-9
6	6	2.50	-10
Sizes are in inches			

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

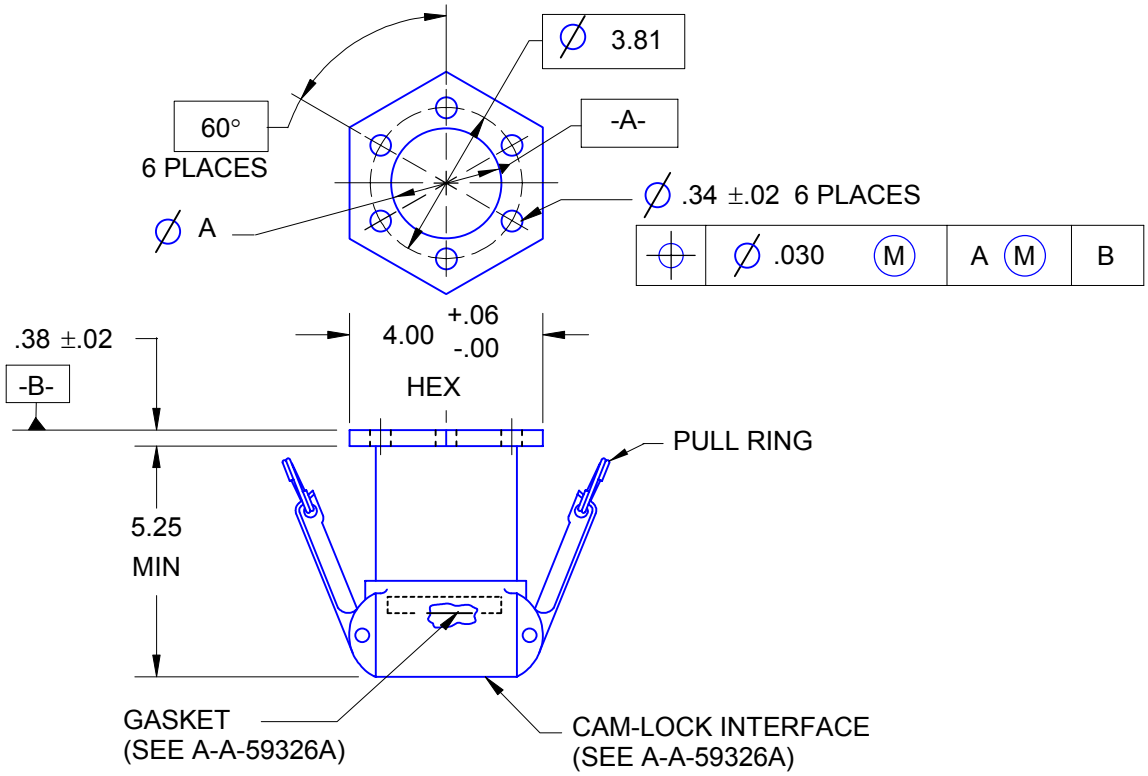

NOTES: 1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
2. The size of the coupling assembly shall conform to table 1.
3. Dimensions are in inches.

FIGURE 1. Coupling half.

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326A.

3.1 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

3.3 Accessories. The coupling shall be supplied with pull rings and gasket indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/9A

AA59326/9-3-SS-1; /9 indicates a Female by Flange Hexagon Type VIIIA Coupling Half; -3 indicates a 2 ½- inch nominal cam locking size; SS indicates a stainless steel body and -1 indicates a style 1 coupling.

Material: A - Aluminum
B - Copper Alloy (Brass or Bronze)
BA - Aluminum Bronze
SS - Stainless Steel

Style 1 - Style 1 couplings do not require the incorporation of a positive locking mechanism to lock the cam arms in the closed position but the cam arms will stay in the closed position when the coupling halves are assembled.

Style 2 - Style 2 couplings will incorporate a positive locking mechanism to lock the cam arms in the closed position when the coupling halves are assembled. The locking mechanism will be manually released (the release doesn't have to stay in the released position) before the cam arms can be moved to the open position.

4.2 International standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326A).

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2029-009)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.