INCH-POUND

MIL-G-16265F
5 April 1993
SUPERSEDING
MIL-G-16265E
10 July 1973
(See 6.9)

MILITARY SPECIFICATION

GASKETS, METALLIC-FLEXIBLE GRAPHITE AND METALLIC-ASBESTOS, SPIRAL WOUND (FOR NAVY FLANGED JOINTS IN PIPING SYSTEMS)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers gaskets of Navy design for use in Navy flanged joints in steam piping systems for temperatures up to and including 875 degrees Fahrenheit (°F).

1.2 Classification.


1.2.1 Part Identifying Number (PIN). The PIN for the gaskets covered by this specification shall consist of a general prefix followed by a specific design designator.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, ATTN: 05Q42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5330
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

The prefix shall consist of the letter "M", and the basic number of this specification. The design designator shall consist of the size, pressure rating series, metal outer ring finish and filler material type as shown in the following example:

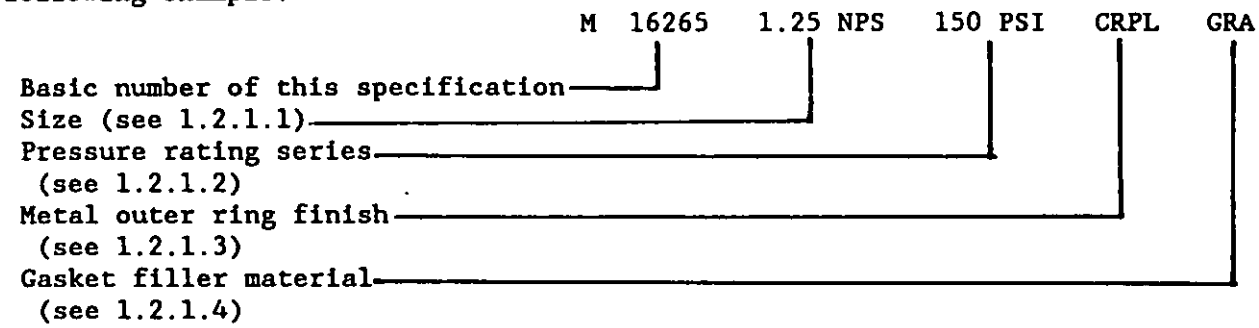

1.2.1.1 Gasket size. The NPS and actual dimensions of the gaskets can be obtained from tables I and II.

1.2.1.2 Pressure rating. Pressure rating shall be as follows:

Pressure Rating (PSI)	Reference
150	Table I
300	Table II
400	Table II
600	Table II

1.2.1.3 Metal outer ring finish. The metal outer ring material and finish options (see 3.2.2) shall be identified as follows:

Code	Metal outer ring material/finish
CRPL	Carbon steel ring/chromium plated
CRES	Corrosion resistant material, as specified, ring/uncoated
UNC	Carbon steel ring/uncoated
REF	No metal outer ring
Blank	Carbon steel ring/vendor coating option

NOTE: "CRES" metal outer rings may be provided in lieu of "CRPL" metal outer rings at the manufacturer's option. "CRES" metal outer rings may be substituted for "CRPL" metal outer rings in service.

1.2.1.4 Gasket filler material. Gasket fillers shall be one of the following materials:

GRA - Flexible graphite filler material to MIL-P-24503
ASB - Asbestos paper filler material to MIL-A-24058

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-C-320 - Chromium Plating (Electrodeposited).
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

MILITARY

MIL-L-19140 - Lumber and Plywood, Fire Retardant Treated.
MIL-F-20670 - Flanges, Pipe, Carbon Steel, 150 PSI, W.S.P. (For Naval Shipboard Use.).
MIL-P-24503 - Packing Material, Graphitic, Corrugated Ribbon or Textured Tape and Preformed Ring.
MIL-A-24058 - Asbestos Packing and Gasketing Material, Impregnated.

STANDARDS

FEDERAL

FED-STD-313 - Material Safety Data Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities.

MILITARY

MIL-STD-2073-1 - DOD Material Procedures for Development and Application of Packaging Requirements.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

810-1385733 - Flanges, Steel For Steel Tubing Welding Neck.
810-1385809 - Fittings, Pipe, Cast Steel Flanged 300 PSI Maximum at 650°F Maximum.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:25Z
Check the source to verify that this is the current version before use.

5000-S4823-1385810 - Fittings, Pipe, Cast Steel Flanged.
5000-S4824-1385571 - Valves, Cast Steel Flanged Globe Angle and Cross.

(Copies of drawings should be addressed to Commander, Portsmouth Naval Shipyard, Naval Engineering Drawing Support Activity, Code 202.2, Portsmouth, NH 03804-5000.)

40 - Code of Federal Regulation - Part 763
Asbestos: Proposed mining and import restrictions and proposed manufacturing and processing prohibitions.

(Copies of the federal regulation are available from the Superintendent of Documents, Government Printing Office, Washington, DC 20402-0001.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)
Boiler and Pressure Vessel Code
Section VIII - Unfired Pressure Vessels.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip. (DOD adopted)
C 930 - Classification for identifying and categorizing potential health and safety hazards of thermal insulation materials.
D 3951 - Standard Practice for Commercial Packaging. (DOD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Design (See 6.2).

3.1.1 Pipe line flange gaskets with metal outer rings. Gaskets shall consist of a refill snapped into a solid metal outer ring (see figure 1) with a sliding fit. The design shall be such that the gasket can be compressed to 0.117 inch thickness without damage. Gaskets shall conform to tables I and II.

3.1.1.1 Refills for all series of gaskets. Refills shall be of the inside and outside dimensions specified in tables I and II. The contracting activity is responsible for furnishing complete data including gasket material, dimensions, the compressed thickness, compression test load, the number and size of bolts, bolt material and service conditions. In those cases where this information cannot be obtained, the following design criteria may be utilized if desired for acquisition of the gaskets. Gaskets shall be designed in accordance with the minimum design seating stress as defined in the ASME Boiler and Pressure Vessel Code, Section VIII, utilizing the formula $W_{m2} = 3.14bGy$.

3.1.1.2 Metal outer ring. The metal outer ring shall have a thickness of .125 + .006 / -.008 inches. The ring shall have a V-shaped groove or other satisfactory retaining feature machined on the inside of the periphery to fit the outside periphery of the refill.

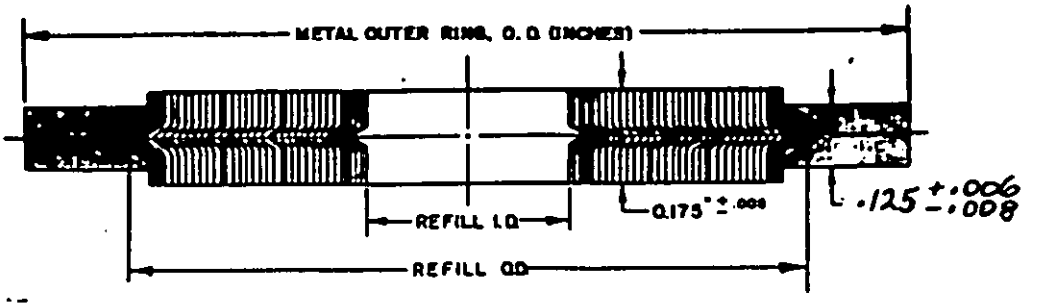


FIGURE 1. Gasket.

3.2 Materials.

3.2.1 Metal strip. The metal strip used in the gasket shall be one of the following materials:

(a) Corrosion resisting steel AISI type 347, cold rolled and annealed in accordance with ASTM A 167.
(b) Corrosion resisting steel, AISI type 316L, in accordance with ASTM A 167.
(c) Corrosion resisting steel, AISI type 309S, in accordance with the applicable requirements of ASTM A 167 except that type 309S shall be stabilized with columbium (and tantalum not exceeding 0.10 percent) and their combination to be not less than 10 times the carbon content.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

TABLE I. Gasket characteristics for series 150 Navy flanges MIL-F-20670.[1]/

Nominal pipe size (Nps)	Pipe outside diameter (OD)	Gasket refills (see figure 1)		Minimum number of plies Metal[2]/			Outer[3]/ metal ring OD	Test load[4]/ gasket pressure
Inches	Inches	ID inches[5]	OD inches[5] [6]/	Inside periphery ±1/2 turn	Outside periphery ±1/2 turn	Total min	Inches	Pounds force
1/4	0.540	3/4	1- 3/32	3	2	8	1- 5/8	11,340
3/8	0.675	7/8	1- 7/32	3	2	8	1- 3/4	11,340
1/2	0.840	1	1-11/32	3	2	8	1-15/16	11,340
3/4	1.050	1-1/4	1-21/32	3	2	9	2- 3/16	15,120
1	1.315	1-1/2	1-31/32	3	2	10	2- 5/8	15,120
1-1/4	1.660	1-3/4	2- 7/32	3	2	10	2- 7/8	15,120
1-1/2	1.900	2-1/4	2-23/32	3	2	10	3- 7/16	22,680
2	2.375	2-3/4	3- 9/32	3	2	10	3-15/16	22,680
2-1/2	2.875	3-3/8	3-31/32	3	2	12	4- 1/2	22,680
3	3.500	3-7/8	4-15/32	3	2	12	5	30,240
3-1/2	4.000	4-3/8	4-31/32	3	2	12	5- 9/16	30,240
4	4.500	4-7/8	5-15/32	3	2	12	6- 1/16	30,240
4-1/2	5.000	5-3/8	6- 1/32	6	3	16	6- 9/16	37,800
5	5.563	5-7/8	6-19/32	6	3	16	7- 3/16	60,600
5-1/2	6.120	6-1/2	7- 7/32	6	3	16	7-11/16	60,600
6	6.625	7	7-25/32	6	3	17	8- 1/4	72,720
7	7.625	8	8-25/32	6	3	17	9- 3/8	72,720
8	8.625	9	9-27/32	6	3	18	10- 7/16	84,840
9	9.625	10	11- 3/32	6	3	22	11- 5/8	126,896
10	10.750	11	12- 3/32	6	3	22	12-11/16	135,960
11	11.750	11-1/2	12-19/32	6	3	22	14- 1/4	145,024
12	12.750	12-1/2	13-23/32	6	3	25	15- 5/16	163,152
14 OD	14.000	--	---	-	-	--	16- 1/2	238,830
15 OD	15.000	--	---	-	-	--	17- 1/2	251,400
16 OD	16.000	--	---	-	-	--	18- 9/16	251,400
18 OD	18.000	--	---	-	-	--	20- 5/8	276,540
20 OD	20.000	--	---	-	-	--	22-11/16	396,120

1/ Gasket for 150 psi, 775°F steam service when used with MIL-F-20670.

2/ There shall be no flexible graphite/asbestos plies between the metal plies on the inside and/or on the outside periphery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

3/ ID of outer metal ring equals OD of refills plus 1/32 inch for all sizes.
4/ Corresponds to bolting load of 30,000 psig plus or minus 10 percent unit stress. Bolts: 3/4 inch diameter, 10 threads; 7/8 inch diameter, 9 threads; all other bolts 8 threads. When under this compressive test load, the gasket thickness shall be 0.130 ± 0.005 inch.
5/ Tolerance plus or minus 1/64 inch on the ID and plus 1/16 minus 1/32 inch on the OD.
6/ Neither outside diameter OD dimension nor outside periphery plies includes additional unwelded plies [see 3.3.2.1(a)].

3.2.2 Metal outer ring. Unless otherwise specified (see 6.2), the metal outer ring shall be of carbon steel. At the option of the manufacturer a protective coating may be applied to the metal outer ring. The resulting dimensions shall conform to 3.1.1.2 and to tables I and II. When specified (see 6.2), the carbon steel outer ring shall be chromium plated in accordance with QQ-C-320. (The manufacturer may, at his option, provide corrosion resisting steel metal outer rings in lieu of chromium plated carbon steel metal outer rings.) The use of coatings composed of metallic materials having melting points lower than the maximum allowable gasket service temperature (see 3.3.1) is prohibited. The use of cadmium plating is prohibited.

3.2.3 Filler material. Graphite gaskets shall have filler material of either graphite type I, class 2 corrugated ribbon, or textured tape material meeting the requirements of MIL-P-24503. Asbestos gaskets shall have filler material which is asbestos paper cushion of the low chloride variety conforming to type III of MIL-A-24058.

3.2.3.1 Filler material thickness. Filler material thickness (see figure 1) between metal windings shall be as specified by the manufacturer to obtain the compression load characteristics specified in 3.1.1 and tables I and II.

3.2.3.2 Filler material surface finish. Filler material surface finish for graphite gaskets may be texturized or lightly corrugated as in accordance with MIL-P-24503, or plain. Asbestos gaskets shall have a surface finish in accordance with MIL-A-24058.

3.2.4 Special application. For special applications other materials may be used only upon specific approval of the activity concerned.

3.2.5 Mercury contamination. During the manufacturing process, tests, or examinations; the supplies ordered shall not have come in direct contact with mercury or any of its compounds nor with any mercury containing devices employing only a single boundary of containment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

TABLE II. Series 300, 400, and 600 Navy flanges.

Nominal pipe (Nps)	Pipe OD	Gasket refills (see figure 1)		Minimum number of plies Metal[2]			Outer metal ring[1] OD inch			Test load[6] gasket pressure
							[3]Series 300	[4]Series 400	[5]Series 600	
Inches	Inches	ID Inches [7]	OD Inches [7, 8]	Inside periphery ±1/2 turn	Outside periphery ±1/2 turn	Total (min)				Pounds
1/4	0.540	1/2	27/32	4	3	9	2-1/8		1-3/4	12,600
3/8	.675	3/4	1-7/32	6	3	12	2-3/8		2-1/8	12,600
1/2	.840	3/4	1-7/32	6	3	12	2-3/8		2-1/8	12,600
3/4	1.050	1	1-17/32	6	3	14	2-11/16	Use	2-5/8	20,200
1	1.315	1-1/4	1-27/32	6	3	14	3-1/8	Series	2-7/8	20,200
1-1/4	1.660	1-11/16	2-11/32	6	3	14	3-7/16	600	3-1/4	24,200
1-1/2	1.900	2	2-23/32	6	3	15	4		3-3/4	36,200
2	2.375	2-9/16	3-11/32	6	3	15	4-1/2		4-5/16	48,400
2-1/2	2.875	2-15/16	3-27/32	6	3	16	5-3/16		5-1/16	72,500
3	3.500	3-3/4	4-23/32	6	3	18	5-3/4		5-13/16	72,500
3-1/2	4.000	4-1/8	5-7/32	6	3	20	6-5/16		6-5/16	100,600
4	4.500	4-3/4	5-27/32	6	3	20	6-7/8		6-15/16	100,600
4-1/2	5.000	5-5/16	6-15/32	6	3	22	7-7/16	7-9/16	7-7/16	132,200
5	5.563	5-13/16	6-31/32	6	3	22	8	8-5/16	8-3/16	132,200
5-1/2	6.125	6-3/8	7-19/32	6	3	22	8-11/16	8-13/16	8-15/16	150,900
6	6.625	6-7/8	8-7/32	6	3	24	9-1/4	9-11/16	9-9/16	198,400
6-1/2	7.125	7-7/16	8-23/32	6	3	24	9-7/8	10-5/16	10-3/16	198,400
7	7.625	7-11/16	9-7/32	6	3	24	10-7/16	10-13/16	10-11/16	262,000
7-1/2	8.125	8-5/16	9-27/32	6	3	27	11-1/8	11-5/16	11-5/16	262,000
8	8.625	8-7/8	10-11/32	6	3	27	11-11/16	11-15/16	11-13/16	262,000
8-1/2	9.125	9-5/16	10-27/32	6	3	27	12-1/4	12-5/16	---	262,000
9	9.625	9-7/8	11-15/32	6	3	32	12-13/16	12-13/16	13-7/16	334,400
9-1/2	10.250	10-5/16	11-31/32	6	3	32	13-3/8	13-9/16	---	349,300

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

TABLE II. Series 300, 400, and 600 Navy flanges.

Nominal pipe (Nps)	Pipe OD	Gasket refills (see figure 1)		Minimum number of plies Metal[2]			Outer metal ring[1] [3]Series 300	[4]Series 400	OD inch [5]Series 600	Test load[6] gasket pressure
Inches	Inches	ID Inches [7]	OD Inches [7, 8]	Inside periphery ±1/2 turn	Outside periphery ±1/2 turn	Total (min)				Pounds
10	10.750	10-13/16	12-15/32	6	3	32	13-15/16	14-1/16	15-11/16	445,900
10-1/2	11.250	11-5/16	12-31/32	6	3	32	14-1/2	14-9/16	---	349,300
11	11.750	11-3/4	13-23/32	6	3	32	15-3/16	15-7/16	16-11/16	557,400
11-1/2	12.250	12-5/16	14-7/32	6	3	32	15-3/4	15-15/16	---	445,900
12	12.750	12-7/8	14-23/32	6	3	32	16-3/8	16-7/16	17-15/16	557,400
14 OD	14.000	14-1/4	15-31/32	6	3	32	17-1/2	18-15/16	---	557,400
15 OD	15.000	15-1/4	16-31/32	6	3	32	18-3/4	20-3/16	---	557,400
16 OD	16.000	16-1/4	18-7/32	6	3	35	19-13/16	21-1/16	---	557,400

[1] Id of outer metal ring equals od of refills plus 1/32 inch for all sizes.
[2] There shall be no flexible graphite/asbestos plies between the metal plies on the inside and on the outside periphery.
[3] Gaskets for 300 psi steam service when used with Drawing 810-1385809 or Drawing 5000-S4824-1385571.
[4] Gaskets for steam service pressure 301 to 400 pounds per square inch gauge (psig) and 850°F when used with Drawing 5000-S4823-1385810.
[5] Gaskets for steam service pressure 401 to 600 psig and 850°F, maximum temperature and boiler feed service pressure 551 to 750 psig and 425°F, maximum temperature, when used with Drawing 810-1385733 and valves for 600 pound service.
[6] Corresponds to bolting load to 25,000 psi unit stress for 1/4 to 1 inch inclusive and 30,000 psi for 1-1/4 inch and above.
[7] Tolerance plus or minus 1/64 inch on the id and plus 1/16 minus 1/32 inch on the od.
[8] Neither outside diameter dimension nor outside periphery plies includes additional unwelded plies (see 3.3.2.1(a)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

3.3 Construction.

3.3.1 Service. Complete gaskets and refills shall be satisfactory for the maximum pressures and temperatures specified in tables I and II.

3.3.2 Assembly. The gaskets shall be composed of a single strip of dovetail shaped metal spirally wound, starting on the inside and working outward ply-by-ply to the desired size. Graphite gaskets shall have a cushion of flexible graphite ribbon or tape filler material between some of the plies. Asbestos gaskets shall have a cushion of asbestos paper between some of the plies (see tables I and II). These fillers shall be either in a continuous single strip or in two strips depending upon the design.

3.3.2.1 Spot Welds. The number and spacing of spot welds on the gasket ID and OD shall conform to the following:

(a) Terminal spot welds. The ends of the ID and OD terminal plies shall be spot welded to the adjacent plies with a minimum of two terminal spot welds. The first terminal spot weld shall be no greater than 1/4 inch from the end of the terminal ply. The second terminal spot weld shall be no greater than 3/4 inch from the first terminal spot weld measured along the perimeter. The terminal ply of the OD is that ply which is spot welded to the adjacent ply to obtain the dimensions in tables I and II; a maximum of four additional unwelded plies of the same continuous metal strip may be wound over the spot welded ply to facilitate fitting the gasket to the metal outer ring.

(b) Additional spot welds on the terminal plies. Additional spot welds shall be located on the gasket ID such that the total number of spot welds on the terminal ply (including the terminal spot welds described in (a)) shall be at least 3 and spaced at 3 inches maximum spacing along the perimeter between the adjacent spot welds in either direction.

3.3.3 Metal strip. Metal strip shall be at least 0.007 and not more than 0.009 inches in thickness.

3.3.4 Gasket thickness. The thickness of the finished gasket (before compression) shall be 0.175 $\pm$ 0.005 inch. (The initial gasket thickness measurement applies to the metallic strip portion of the gasket and does not include the filler material which may protrude slightly when in the non-compressed condition).

3.3.5 Plies. A ply shall consist of one 360 degree turn of metal strip. Plies shall be counted adjacent to a terminal weld. A ply shall contain either flexible graphite or asbestos consisting of one 360 degree turn of flexible graphite strip(s) or asbestos strip(s) respectively, depending upon the design.

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:25Z
Check the source to verify that this is the current version before use.

3.3.6 Compression tests. Gaskets shall be capable of passing the compression load tests of 4.4.1.

3.3.7 Workmanship. Surfaces and edges of gaskets and metal outer rings shall be free of burrs and loosely adhering metal.

3.4 Marking. Each gasket shall be permanently marked (for example, steel stamped or laser etched) on the metal outer ring to show the manufacturer's name, pipe size, pressure series, material of metal strip and filler (see 1.2.1.4), and "N" to indicate that the gasket is for Navy flanges and also meets the requirements of this specification (example: "2-600-SS-GRA-N"). Both sides of the metal outer ring may be used where necessary on smaller sizes to furnish the above information.

3.4.1 Refills. When refills are purchased separate from the rings, each refill shall be identified by enclosing each refill in a paper or plastic bag, or by means approved by the contracting activity, having the manufacturer's name, pipe size, pressure series, metal strip material, filler material and "N" printed thereon. If a paper or plastic bag is used, it shall be adequately sealed to ensure that the refill is retained in the bag. Identification markings need not be printed on plastic bags provided the marking is placed in the bag and is visible without requiring the bag to be opened.

3.5 Cleanliness requirements. Surface of gaskets and related parts shall be commercially clean, for example, free of dirt, oils, grease, chips, and any foreign matter.

3.6 Production equipment inspection. An inspection shall be performed prior to starting a product run to ensure that equipment and process lines have been purged of material from the previous production run. The inspection shall be performed on all equipment used in manufacturing operations where the material is not segregated and positively identified.

3.7 Material safety data sheet (MSDS). The contracting activity shall be provided a material safety data sheet for all items containing asbestos at the time of contract award. The MSDS shall be provided in accordance with the requirements of FED-STD-313. The MSDS shall be included with each shipment of the material covered by this specification (see 5.5 and 6.8.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Unless otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of the manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Sampling for quality conformance. As a minimum, the contractor shall randomly select and examine or test the sample quantities specified herein to establish conformance to the requirements of this specification. If one or more defects are found in any sample, the entire lot shall be rejected. The contractor has the option of screening the rejected lot 100 percent for the defective characteristic(s) or providing a new lot which shall be inspected in accordance with the sampling plan contained herein.

4.2.1 Lot. All gaskets of the same series and size produced in one facility, using the same materials and production processes, and offered for delivery at one time shall be considered a lot for purposes of sampling, inspection, and testing.

4.2.2 Sampling for visual, dimensional, workmanship and marking examination and alloy identity testing. Sample gaskets shall be selected at random from each lot in accordance with table III for the examinations and tests specified in 4.3 and 4.4.3.

TABLE III. Sampling for visual, dimensional, workmanship and marking examination and alloy identity [1] testing.

Lot size (number of gaskets)	Sample size (number to be examined/tested)
1 to 10	All
11 to 25	10
26 to 150	15
151 to 280	19
281 to 500	21
501 to 1200	27
1201 to 3200	35
3201 and over	38

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

[1] Sampling for alloy identity testing is only allowable if testing of each gasket in the lot is not required (see 4.2.2 and 6.2).

4.2.3 Sampling for compression tests. Sample gaskets shall be selected from each lot in accordance with table IV for the test specified in 4.4.1. If any gasket fails the compression test, the entire lot shall be rejected.

TABLE IV. Sampling for compression test.

Lot size (Number of gaskets)	Sample size (Number to be tested)
1 to 25	1
26 to 180	2
181 to 500	3
501 to 800	5
801 to 1,300	7
1,301 to 3,200	10
3,201 to 8,000	15
8,001 to 22,000	25
22,001 and over	35

4.3 Visual, dimensional, workmanship and marking examination. Each of the sample gaskets selected in accordance with 4.2.2 shall be examined and measured to verify conformance with all of the requirements of this specification which do not include the compression tests. Examination shall be conducted as specified in table V. The number of plies shall be counted using a magnifying glass to ensure accuracy of the count.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects.

Categories	Defects
Critical:	
1	Alloy not as specified.
Major:	
101	Series of gasket not as specified.
102	Number of metal plies less than specified minimum.
103	Spot welds (on inside and outside diameters) missing, not the required number, incorrectly spaced, or spot welds defective.
104	Thickness of metal strip not within the specified maximal and maximal values, or metal strip not continuous (one piece).
105	Uncompressed thickness of finished gasket not within specified tolerances.
106	Gasket refill not a sliding fit in the metal ring, or metal ring not provided with a satisfactory means of retaining the refill.
107	Inside or outside diameter of refill not within the specified tolerances.
108	Identification of markings (tag for type I) missing, illegible, incorrect or not as specified.
109	Surfaces or edges of gaskets or metal rings having burrs or loosely adhering metal.
110	Surfaces of gaskets or related parts exhibiting dirt, oils, grease, chips or any foreign matter.
111	Thickness of metal outer ring is outside specified tolerances.

4.3.1 Visual examination of spot welds. Spot welds shall be visually examined at a magnification of 5 to 10X. Defective spot welds, referenced in table V, category 103, shall be defined as welds showing burn-through or cracks exceeding the following dimensions (see figure 2):

Gasket thickness	Axial direction	Circumferential direction
0.175 inch	0.045 inch	0.134 inch

Acceptance criteria for defective spot welds shall be as specified in table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

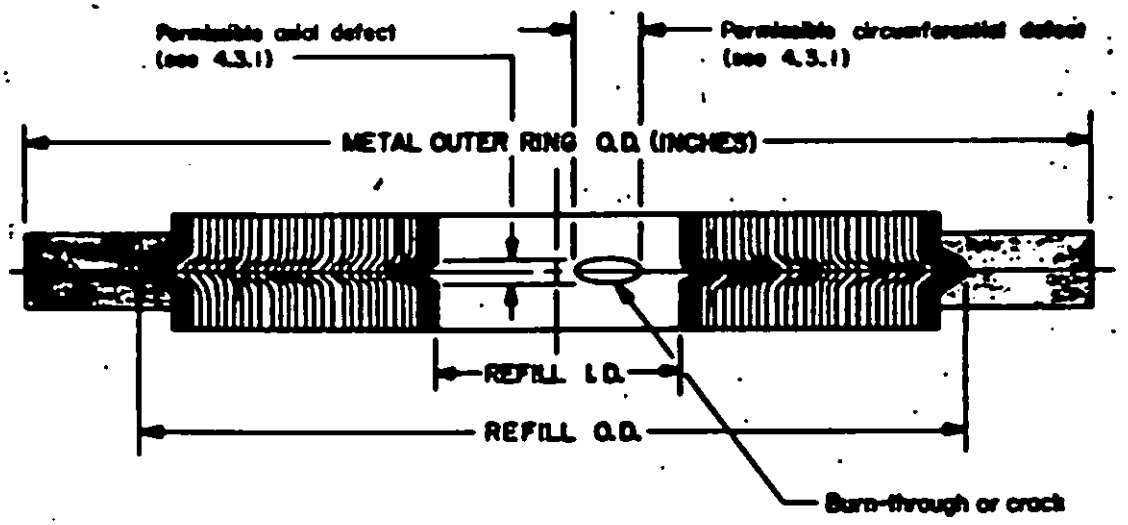


FIGURE 2. Gasket, spot weld examination.

TABLE VI. Examination of spot welds.[1]

Number of spot welds in gasket ID	Acceptance number (defective)	Rejection number (defective)
3 to 4	0	1
5 to 7	1	2
8 to 11	2	3
12 to 15	3	4
16 and over	4	5

[1] Any gasket, regardless of the number of spot welds, containing 2 defective welds adjacent to each other shall be considered a reject.

4.3.2 Filler material. Filler material inspection shall ensure that the material specified in 3.2.3, which is used in fabricating the gasket, is in conformance with the referenced specification or requirements prior to such fabrication (see figure 3).

4.4 Quality conformance tests.

4.4.1 Compression load test. The test shall consist of subjecting the gasket to compression in a hydraulic compression machine of suitable capacity and measuring the thickness of the gasket while under the test load specified in tables I and II, as applicable.

4.4.1.1 Equipment. Gaskets shall be tested between steel test plates, the surfaces of which shall have a smooth finish machined with a circular lay (concentric or phonographic) having a roughness not exceeding 500 microinches roughness average (RA) produced by machining not less than 40 cuts of uniform depth per inch of face width. Where a finer finish is required and so specified

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:25Z
Check the source to verify that this is the current version before use.

(see 6.2), plates with a roughness range of 63 to 125 microinches RA shall be used. Test plates shall be centrally located under the ball and socket head of the machine load applied to the gasket. By means of inverted T-straps, the upper compression plate shall be suspended and held in place when inserting a gasket. Four dial indicators graduated in 1/1000 inch divisions, located 90 degrees apart and mounted on the upper compression plate are employed for measuring the thickness of the gasket. (Electronic pickup and recording of gasket thickness is acceptable in lieu of dial indicators.)

4.4.1.2 Loading. During the test the load shall be increased until a load corresponding to the test load in accordance with tables I and II is obtained for the gasket under test. The maximum rate of loading allowed shall be 2000 pounds per second. When specified (see 6.2), a plot showing load (ordinate) versus deflection (abscissa) shall be prepared and made available for each test made. Gaskets being tested shall include the metal outer ring specified in 3.1.1.2. To ensure reliability of gasket compression characteristics for the gaskets, the final compression test load shall be read prior to the test plates making contact with the gasket compression stop ring (metal outer ring).

4.4.1.3 Test procedure. Steel test plates shall be placed in contact with each other and under an applied load of 3000 pounds, the dial indicators shall be set so that a zero reading is obtained with the maximal travel of the indicator plunger. Plates shall then be separated, a gasket centrally located between plates, and the upper plate brought into contact with the gasket without a load being applied. Dial indicators shall then be read, and the average of the four readings shall closely check the original micrometer thickness of the gasket. The load shall then be applied and the rate of loading depends on the size of gasket and the maximal load to be applied. The specified load shall be maintained only for a sufficient time, 5 to 10 seconds, to obtain the dial indicator readings. By means of reading the dial indicator scales counter-clockwise instead of clockwise the actual thickness of the gasket shall be directly obtained. The average of the four dial indicator readings shall be considered to be the thickness of the gasket. After completion of the test, the load shall be released but the upper compression plate shall be left in contact with the gasket for approximately 10 seconds and the dial indicator readings shall be taken to determine the recovery of the gaskets. The test plates shall then be separated, the gasket removed from the test machine, measured for thickness by micrometers, examined for excessive buckling on the inner periphery The final micrometer thickness and the released average dial indicator thickness of the gasket shall be approximately the same providing the dial indicators are in proper adjustment. (Periodically, between test runs, the zero setting of the dial indicators shall be checked with the test plates in contact with one another.) No excessive buckling on the inner edge of the gasket shall be allowed (see 4.4.1.4(a)). Gaskets undergoing the compression test shall recover at least 0.010 inch over the compressed value obtained in the compression test specified in 4.4.1.2. It shall be the responsibility of the gasket manufacturer to adjust dial indicator readings to compensate for any deflection of test plates under load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

4.4.1.4 Test failures. Test failures are defined as follows:

(a) Gasket buckled excessively on inner periphery to the extent that metal plies separated or the dovetail formed metal strip imploded.
(b) Welding failed.
(c) Gasket thickness recovered less than 0.010 inch after release of compression test load.
(d) Compressed gasket thickness not in specified range at specified load.

4.4.2 Chemical analysis. Mill certification of materials may be accepted in lieu of performing chemical and physical tests. Such certification should contain the results of the chemical check analysis of the heat from the steel obtained, the heat number and date. When considered necessary, the samples selected in accordance with 4.2 shall be subjected to a chemical analysis to determine conformance with 3.2.1.

4.4.3 Alloy identity. Prior to packaging, each of the sample gaskets selected in accordance with 4.2.2 or, when specified (see 6.2), each of the gaskets in the lot, shall be examined for alloy identity by a spot tester manufactured by Systems Scientific Laboratory, Ridgewood, New Jersey 07451, or Spot Testers Inc., Springfield, New Jersey 07081, or other equal tester which has been demonstrated to be satisfactory to the Government inspection personnel. Test plates (for calibration purposes) of the alloys to be tested shall be provided for each tester. If any sample fails the alloy identity examination, the entire lot shall be rejected.

4.4.4 Refill sliding fit. Unless otherwise specified (see 6.2), each of the gaskets in the lot shall be tested to determine that the refill has a sliding fit in the metal outer ring.

4.5 Test reports. Unless otherwise specified (see 6.2, 6.6 and figure 3), a test report shall be furnished with each lot of material offered for acceptance. The test report shall include the results of the visual, dimensional, workmanship, marking, and refill sliding fit examinations; visual examination of spot welds; compression load tests; and the alloy identity test. Unless otherwise specified herein, qualitative results of nondestructive tests shall be recorded in the test report.

4.6 Inspection of packaging. Sample packages and the inspection of the packaging (preservation, packing and marking) for shipment, stowage and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

5. PACKAGING

(The packaging requirements specified herein apply only for direct Government acquisitions. For the extent of applicability of the preparation for delivery or packaging requirements of referenced documents listed in section 2, see 6.2.)

5.1 General.

5.1.1 Navy fire retardant requirements.

(a) Lumber and plywood. When specified (see 6.2), all lumber and plywood including laminated veneer materials used in shipping container and pallet construction, members, blocking, bracing, and reinforcing shall be fire-retardant treated materials conforming to MIL-L-19140 as follows:

Level A and B - Type II - weather resistant.
Category I - general use.

Level C - Type I - nonweather resistant.
Category I - general use.

(b) Fiberboard. Fiberboard used in the construction of interior (unit and intermediate) and exterior fiberboard boxes including interior packaging foms shall conform to the class-domestic/ fire retardant or class-weather resistant/fire retardant material requirements as specified (see 6.2) of PPP-F-320.

(c) Cushioning and wrapping materials. The use of excelsior, newspaper, shredded paper (all types), and similar hydroscopic or nonneutral materials and all types of loose fill materials for packaging applications such as cushioning, fill, stuffing, and dunnage is prohibited. Materials selected shall have properties (characteristics) for resistance to fire (see 6.8). Cushioning or wrapping materials, as applicable, shall be provided to prevent item and package damage and to prevent free movement of the container contents.

5.1.2 Asbestos items (see 3.2.3). All asbestos and separately protected items containing asbestos shall be protected in sealed, dust and siftproof packs. Flexible packs shall be heat sealed. All packages shall be marked as required by 5.4.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:25Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Gaskets and refills, in quantity as specified (see 6.2), shall be placed in a water resistant folding, setup, or metal edged paperboard or a class-weather resistant/fire retardant fiberboard (see 5.1.1(b)) box meeting the unit and intermediate container requirements of MIL-STD-2073-1. The container selection shall be at the option of the contractor.

5.2.1.1 Bundling. When specified (see 6.2), gaskets shall be bundled, tied and wrapped in fire retardant material (see 5.1.1(c) and 6.9). The wrapper shall be secured with pressure sensitive tape. The quantity per bundle and required ties shall be as follows:

Gaskets (with metal outer rings)

Size (o.d.)	Quantity and tying
Up to and including 5 inches	25 pieces
Over 5 inches to 8 inches, inclusive	25 pieces, tied in 2 equidistant places
Over 8 inches to 11 inches, inclusive	25 pieces, tied in 4 equidistant places
Over 11 inches to 16 inches, inclusive	10 pieces, tied in 4 equidistant places
Over 16 inches	5 pieces, tied in 4 equidistant places

5.2.1.2 Bulk. When specified (see 6.2), gaskets of like size and description shall be bulk packed directly into shipping containers for the level specified.

5.2.2 Level C. Gaskets and refills shall be preserved as specified under level A except that the interior (unit and intermediate) boxes shall be as follows:

(a) The paperboard containers shall be of the domestic or nonweather resistant type, class or variety as applicable and,
(b) The fiberboard box shall be of the class-domestic/fire-retardant material (see 5.1.1(b)). The box closure shall be in accordance with method I using pressure sensitive adhesive tape.

5.2.3 Commercial. Commercial packaging (cleaning, preservation, cushioning, and unit pack) shall be in accordance with ASTM D 3951.

5.3 Packing. Packing shall be level A, B, C, or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

5.3.1 General requirements for levels A, B and C. Containers selected (see 5.3.2), shall be of minimum weight and cube consistent with the protection required, of uniform size, and contain identical quantities of identical gasket and filler material.

5.3.2 Levels A, B and C containers. Material preserved as specified (see 5.2), shall be packed in exterior shipping containers for the level of packing specified (see 5.3), in accordance with MIL-STD-2073-1, and herein. Unless otherwise specified (see 6.2), container selection shall be at the contractor's option.

5.3.2.1 Caseliners, closure and gross weight.

5.3.2.1.1 Caseliners. Unless otherwise specified (see 6.2), level A shipping containers containing packing preserved level C or commercial shall be provided with waterproof caseliners in accordance with MIL-STD-2073-1.

5.3.2.1.2 Closure. Container closure, reinforcing, or banding shall be in accordance with the applicable container specification or appendix thereto except that class-weather-resistant/fire-retardant fiberboard boxes shall be closed in accordance with method V and reinforced with nonmetallic or tape banding and class domestic or class-domestic/fire retardant fiberboard boxes shall be closed in accordance with method I using pressure sensitive tape.

5.3.2.1.3 Weight. Wood, plywood, and cleated type containers exceeding 200 pounds gross weight shall be modified by the addition of skids in accordance with MIL-STD-2073-1 and the applicable container specification or appendix thereto.

5.3.3 Commercial. Material preserved as specified (see 5.2) shall be packed for shipment in accordance with ASTM D 3951 and herein.

5.3.3.1 Container modification. Shipping containers exceeding 200 pounds gross weight shall have a minimum of two, 3-inch by 4-inch nominal wood skids laid flat, or a skid or sill type base which will support the material and facilitate handling by mechanical handling equipment during shipment, stowage and storage.

5.4 Marking, levels A, B, C and commercial. In addition to any special marking required (see 6.2), interior packs and shipping containers shall be marked for shipment, stowage, and storage in accordance with MIL-STD-2073-1.

5.5 Material safety data sheet (MSDS). A copy of the material safety data sheet shall be attached to the shipping document for each destination (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Spiral wound metallic-flexible graphite and metallic-asbestos gaskets are intended for use in pipe line flange joints, and in steam piping systems where pressure and temperature conditions do not exceed 600 pounds per square inch and 875°F.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number and date of this specification.
(b) Part or Identifying Number (PIN) (see 1.2.1 and 3.2 respectively).
(c) Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
(d) Specify gasket size and whether refills (see 3.1.1.1) are required.
(e) Temperatures, and other service conditions (see 3.3.1).
(f) When an alternate metal outer ring material or a protective coating of the metal outer ring is required (see 3.2.2).
(g) Inspection records (see 4.1.2 and 6.5).
(h) When finer surface finish is required for steel test plates (see 4.4.1.1).
(i) When load deflection curves are required (see 4.4.1.2).
(j) When each of the gaskets in a lot shall be examined for alloy identity (see 4.4.3).
(k) When test for refill sliding fit is not required (see 4.4.4).
(l) When certification of quality conformance is not required (see 4.5).
(m) When fire retardant lumber and plywood is required (see 5.1.1(a)).
(n) Class of fire retardant fiberboard required (see 5.1.1(b)).
(o) Level of preservation and level of packing required (see 5.2 and 5.3).
(p) Quantity per package (see 5.2.1).
(q) When bundling or bulk is required (see 5.2.1.1 and 5.2.1.2).
(r) Container selection and options if other than the contractor's (see 5.2.1 and 5.3.2).
(s) When caseliners are not required (see 5.3.2.1.1).
(t) Special marking required (see 5.4).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/ provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:25Z
Check the source to verify that this is the current version before use.

requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
4.1.1	DI-RELI-80939	Test and Inspection System	--------

The above DID was cleared as of the date of this specification. The current issue of DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4 Sub-contracted material and parts. The packaging or preparation for delivery requirements of referenced documents listed in section 2 do not apply when gaskets are procured by the supplier for incorporation into the equipment and the gaskets lose their separate identity when the equipment is shipped.

6.5 Records. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order (see 4.1.2, 6.2 and 6.3).

6.6 Test Reports. Unless otherwise specified (see 4.5 and 6.2), a test report (see figure 3) shall be furnished with each lot of material offered for acceptance. The test report shall include the results of visual and dimensional examination, visual examination of spot weld, the compression load test, and the alloy identity test. Unless otherwise specified herein, qualitative results of nondestructive tests shall be recorded in the test report.

6.7 Subject term (key word) listing.

Corrosion-resistant steel
Corrugated ribbon
Pipe line joints
Textured tape
Graphite
Asbestos

6.8 Cushioning and wrapping materials (see 5.1.1(c)). Materials having properties for resistance to fire and acceptable for use within interior packs and shipping containers for Navy acquisitions are:

Material	Specification
Cushioning Material, Plastic, Open Cell	A-A-440
Paper, Kraft, Treated (Fire Resistant)	A-A-1894
Paper, Kraft, Wrapping	UU-P-268, Type II, Grade C or D
Fiberboard	PPP-F-320, see 5.1.1(b)
Plastic Film, Flexible, Cellular	PPP-C-795, Class 3-Fire Retardant

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

Polystyrene Expanded, Resilient Plastic, Open Cell, Cushioning Bound Fiber	PPP-C-850, Grade SE PPP-C-1842, Type I, Style B PPP-C-1120, Class A, Grade 1 Type Optional
Barrier Materials	MIL-B-131, Type II
Rubber, Latex Foam	MIL-R-5001, Grade A
Rubber, Cellular	MIL-R-6130, Grade A
Fibrous Glass	MIL-C-17435
Polystyrene Foam	MIL-P-19644, Type II
Rubber, Cellular, Synthetic	MIL-R-20092, Class 5
Polyurethane Foam	MIL-P-26514
Polyurethane Foam, Flexible Open Cell	MIL-F-81334
Foam-In-Place Packaging Materials: General Specification For	MIL-F-83671
Foam, Combustion, Retardant, for Cushioning Supply Items Aboard Navy Ships	MIL-F-87090(SA)

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - MR
Navy - SH
Air Force - 99

Review activities:
Air Force - 82
DLA - IS

User activities:
Army - ME
Navy - OS

Preparing activity:
Navy - SH
(Project 5330-0885)

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:25Z
Check the source to verify that this is the current version before use.

Manufacturer or distributor _____ Customer's name _____
Address _____ Customer's order No. _____
Date _____ PIN _____
Filler Material _____ Grade _____ Lot No. _____

Dimensions	Refills	Outer Ring
ID inches	_____	
OD inches	_____	_____
Thickness, inches	_____	_____

Metal strip
Document number

ASTM - _____
MIL- _____
Federal _____

Flexible Graphite
Document number
MIL-P-24503

Asbestos
Document number
MIL-A-24058

Visual and dimensional examination
- Number examined _____
- Number defective _____
- Classification of defects (see table V) _____

Visual examination of spot welds
- Number examined _____
- Number defective _____
- Classification of defects _____

Compression load test
- Test load, pounds _____
- Compressed thickness, inches _____
- Number tested _____
- Number failed _____
- Nature of failure (see 4.4.1.4) _____

Chemical analysis
- Number tested _____
- Number accepted _____

We hereby certify that the metal strip and filler material used in the spiral wound metallic-flexible graphite/metallic-asbestos gaskets is in accordance with the specification listed above. (Submittal of actual test data for the metal strip is not required.) We further certify that the gaskets have been tested in accordance with MIL-G-16265 as modified by the applicable amendments. We certify, also, that the gaskets have not come in contact with mercury or any of its compounds.

_____
Authorized Company Representative

1/ Items not applicable to the lot of material involved shall be marked N/A.
2/ This form is applicable to the quality conformance tests required for each lot, and a copy shall be forwarded with each shipment.

FIGURE 3 Certification of quality conformance 1/ 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-G-16265F	93-04-05

3. DOCUMENT TITLE GASKETS, METTALIC-FLEXIBLE GRAPHITE AND METALLIC-ASBESTOS, SPIRAL WOUND (FOR NAVY FLANGED JOINTS IN PIPING SYSTEMS)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME TECHNICAL POINT OF CONTACT TPOC: MR. JIM REID (05Y239) PLEASE ADDRESS CORRESPONDENCE TO:	b. TELEPHONE (Include Area Code) (1) Commercial: (703) 602-0367 (2) AUTOVON: 8-332-0367
c. ADDRESS (Include Zip Code) COMMANDER, SEA 05Q42 NAVAL SEA SYSTEMS COMMAND 2531 JEFFERSON DAVIS HWY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 20240-18108:252
Check the source to verify that this is the current version before use.