MILITARY SPECIFICATION

DISPENSER ASSEMBLY

This amendment forms a part of Military Specification MIL-D-63123A(AR), dated 17 December, 1979, and is approved for use by the US Army Armament Research and Development Command and is available for use by all the Departments and Agencies of the Department of Defense.

PAGE 2

2.1: Delete "MIL-STD-454" and "MIL-STD-1460" in their entirety and substitute the following:

MIL-S-45743 - Soldering, Manual Type, High Reliability Electrical and Electronic Equipment

MIL-S-46844 - Solder Both Soldering of Printed Wiring Assemblies

PAGE 3

3.3.1, Change to read:

"The dispenser assembly, in both the chaff and flare modes upon receipt of thirty (30) pulses of 20 to 30 volt direct current (DC) dispense pulses conforming to Figure 1, shall fire 30 payloads in sequence, 1 through 30".

Add "Figure 1" as shown:

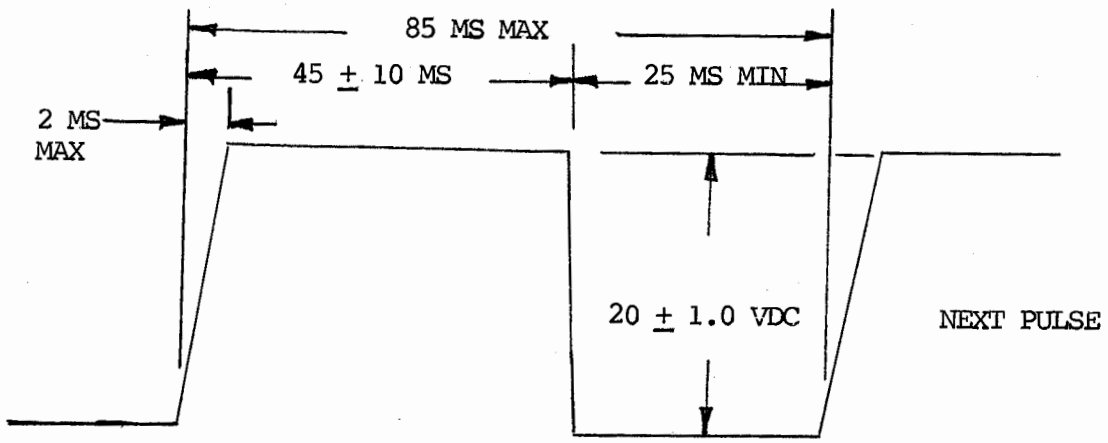

FIGURE 1 Dispense pulse

3.4.2, change "Figure 1" to "Figure 2".

FSC 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.

PAGE 4

Change "Figure 1" to "Figure 2".

PAGE 5

3.5, delete "MIL-STD-1460" and add "MIL-S-45743 and MIL-S-46844 as applicable".

PAGE 7

Change: "Delete Major 105 . . ." to "Delete Major 106 . . .".

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A213)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:16Z
Check the source to verify that this is the current version before use.