INCH-POUND

MIL-PRF-27/192A
18 July 2008
SUPERSEDING
MIL-T-27/192
18 October 1977

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN

Inactive for new design
after 14 February 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification and MIL-PRF-27.


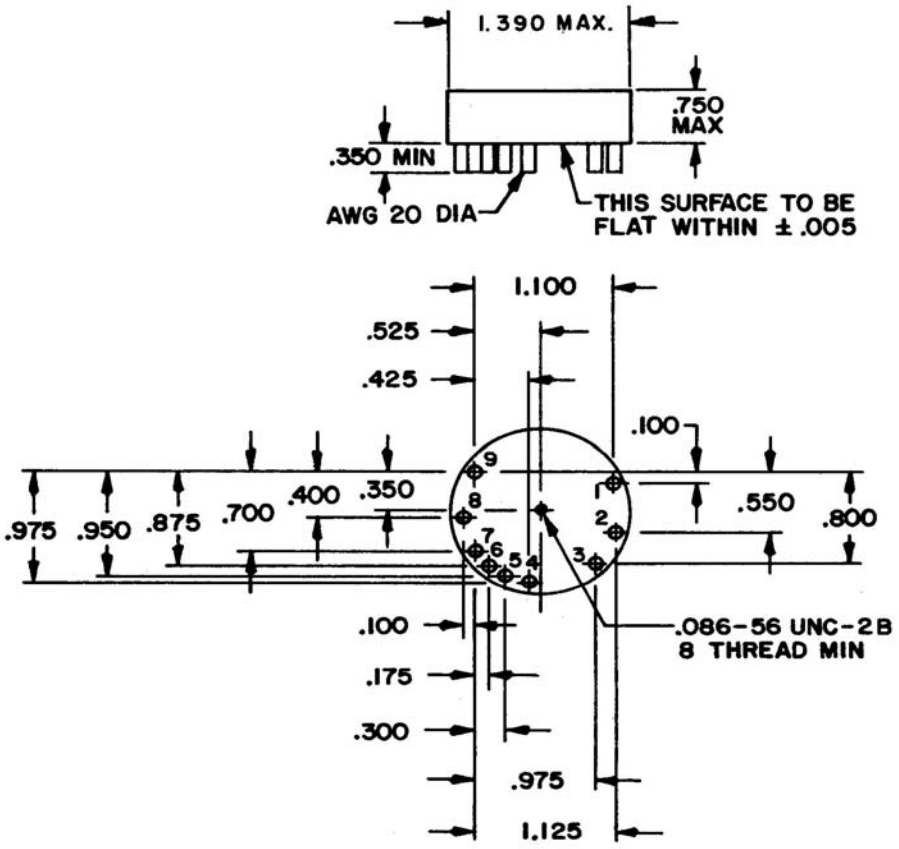


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:48Z
Check the source to verify that this is the current version before use.

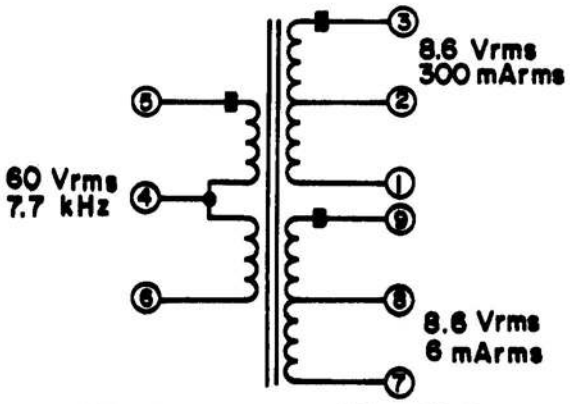

WORKING VOLTAGE: 175 V MAX
CIRCUIT DIAGRAM AND MARKING

INCHES	MM	INCHES	MM
.086	2.18	.700	17.78
.100	2.54	.750	19.05
.175	4.44	.800	20.32
.300	7.62	.875	22.22
.350	8.89	.950	24.13
.400	10.16	.975	24.76
.425	10.80	1.100	27.94
.525	13.34	1.125	28.58
.550	13.97	1.390	35.31

NOTES:
1.Dimensions are in inches.
2.Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4.Marking shall be on the top of the case.

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When designations or colors in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage (5-6): 60 volts rms, 7.7 kilohertz.
Primary current: .5 ampere rms.
Primary power: 30 volt ampere.
Secondary voltage:
(1-3): 8.6 volts rms, 300 milliamperes rms.
(7-9): 8.6 volts rms, 6 milliamperes rms.
Working voltage: 175 volts, maximum.
DC resistance:
(1-3): .043 ohm.
(7-9): .09 ohm.
(5-6): .49 ohm.

Design and construction:

Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Epoxy.
Weight: 3 ounces.
Terminals: Pin type.
Material: Type S with tin, lead, or lead alloy coating, in accordance with A-A-59551.
Height: .350 inch, minimum.
Diameter: AWG 20 (.032 inch).

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage (at sea level): 1,000 volts rms.

Electrical characteristics:

No load: With 60 volts rms and 7.7 kilohertz in (5-6):
Current in (5-6): 22 milliamperes, maximum.
Power in (5-6): 1.2 watts, maximum.
Voltage across (5-6): 60 volts rms.
Voltage across (1-3): 8 volts rms ±1 percent.
Voltage across (7-9): 8 volts rms ±1 percent.
Rated load: With 60 volts rms and 7.7 kilohertz (5-6):
Voltage across (1-3): 8.6 volts rms ±5 percent.
Voltage across (7-9): 8.6 volts rms ±5 percent.

Polarity: Additive with terminals 1 and 9 connected.

Temperature rise: 40°C with 60 volts rms, 7.7 kilohertz across (5-6) at an ambient temperature of +125°C..

Vibration, high frequency: MIL-STD-202, method 204.

Shock (specified pulse): MIL-STD-202, method 213, test condition A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:48Z
Check the source to verify that this is the current version before use.

VERIFICATION:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-PRF-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/192-01.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202
A-A-59551

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA – CC

(Project 5950-2008-026)

Review activities:
Army – AR, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:48Z
Check the source to verify that this is the current version before use.