INCH-POUND

MIL-T-27/174C
20 April 1993
SUPERSEDING
MIL-T-27/174B
16 November 1987

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, POWER, TF4S04LB

(C) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

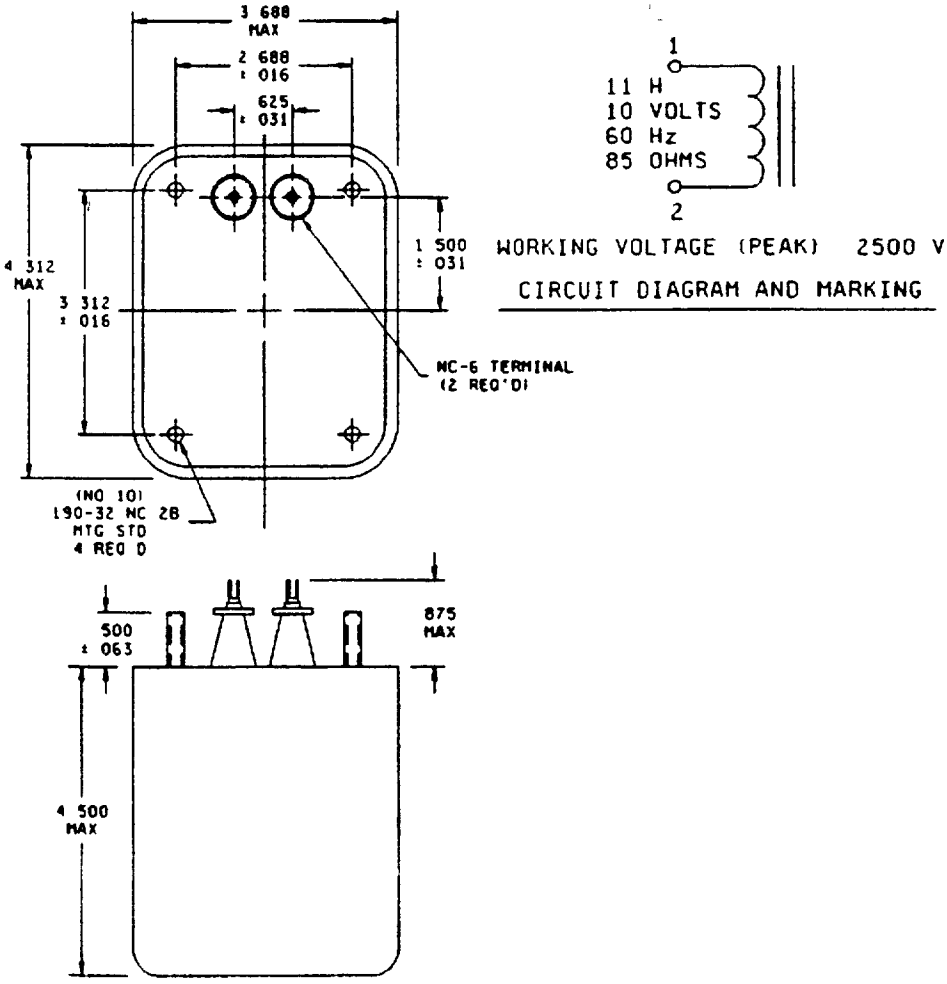


FIGURE 1 Dimensions and configurations

(C) denotes changes

AMSC N/A FSC 5950

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:45Z
Check the source to verify that this is the current version before use.

Inches	mm
016	0 41
.031	0 79
063	1.60
190	4 83
.500	12 70
625	15 88
875	22.22
1 500	38 10
2 688	68 28
3 312	84.12
3 688	93 68
4 312	109 52
4 500	114 30

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the sides of the case
4 Dash numbers -02 through -09 have been canceled without replacement

FIGURE 1 Dimensions and configurations

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings

Inductance (1-2) 11 Henries (H), minimum

Voltage (1-2) 10 V rms, 60 Hz.

Current (1-2) 0 2 ampere, dc

DC resistance 85 ohms, ±25 percent

Working voltage (peak) 2500 V

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Metal enclosed

Material Steel

Terminals Solder lug type with ceramic insulator, NC-6 or equivalent

Terminal height 875 inch, maximum

Weight 12 pounds, maximum

Operating temperature range -55°C to +130°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:45Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (at sea level) 4,500 V rms

Electrical characteristics

Inductance With 10 V rms, 60 Hz across (1-2), and 0.2 ampere dc applied to (1-2), the inductance shall be 11 H, minimum

Temperature rise 40°C with 10 V, 60 Hz applied to (1-2) at an ambient temperature of 90°C

C Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/174-01 (see figure 1)

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - YD
DLA - ES

User activities
Army - ME
Navy - MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:45Z
Check the source to verify that this is the current version before use.