| INCH-POUND |


MIL-T-27/179C
8 April 1992
SUPERSEDING
MIL-T-27/179B
23 July 1990


MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTOR, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

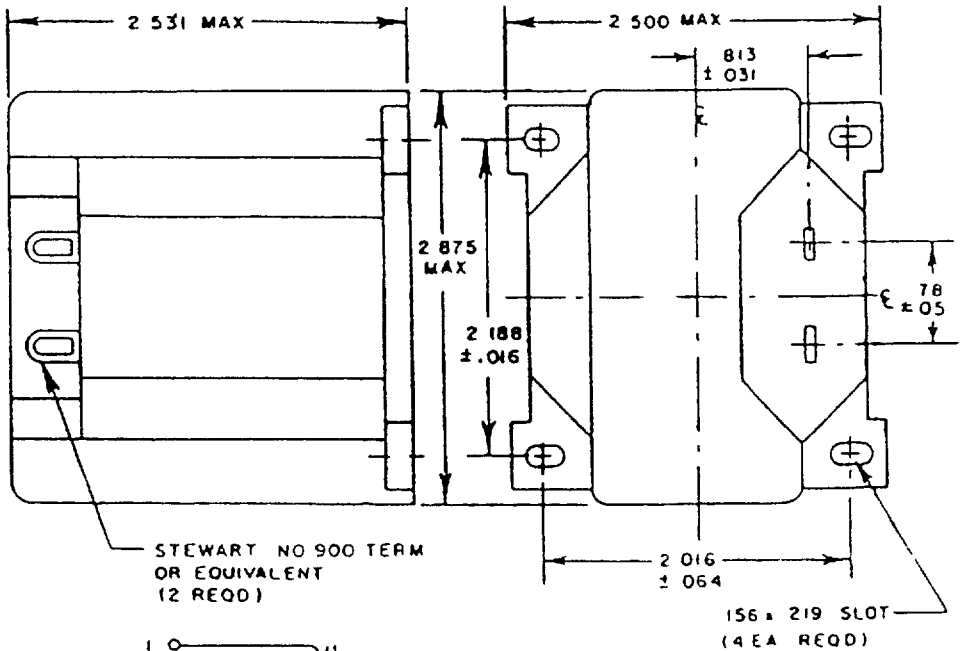



WORKING VOLTAGE (PEAK) 1070 V

CIRCUIT DIAGRAM AND MARKING

Inches	mm	Inches	mm
016	0 41	780	19 81
031	0 79	813	20 65
050	1 27	2.016	51 21
064	1 63	2 188	55 58
156	3 96	2 500	63 50
219	5 56	2 531	64 29
312	7 92	2 875	73 02

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the windind and extreme terminals of the windings)

Electrical ratings

Inductance (1-2) 1 0 henry minimum

Voltage (1-2) 10 volts, 60 Hz maximum

Current (1-2) 325 mA dc

DC resistance (1-2) 44 ohms maximum

Working voltage (peak) 1,070 volts

Power 4 6 watts

Design and construction

Dimensions and configurations See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Terminals Solder type, Stewart number 900 or equivalent

(C) Height 0 350 inch ±0 100

Weight 0 95 kilogram maximum

Operating temperature range -55°C to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds and test condition E, 8 ounce-inches

Shock (specified pulse) MIL-STD-202, method 213, test condition H

Dielectric withstanding voltage (at sea level) 2,500 volts rms

Electrical characteristics

Inductance With 10 0 volts rms, 60 Hz across (1-2), and 325 mA dc applied to (1-2), the inductance shall be 1 0 H minimum

Temperature rise 45°C maximum with 10 0 volts rms, 60 Hz, 325 mA dc applied to (1-2) at an ambient temperature of 85°C

Marking location See figure 1

Part or Identifying Number (PIN) M27/179-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0790)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.