
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN AND STEP-UP, TF4S03JA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

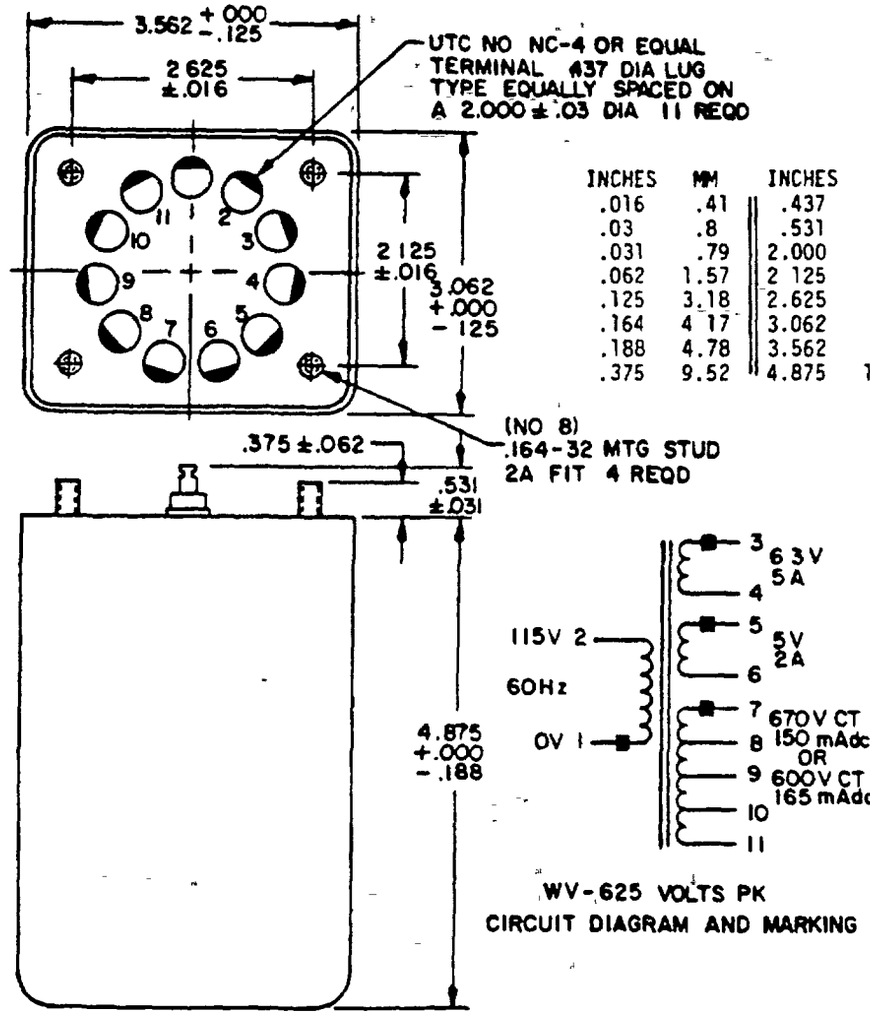

INCHES	MM	INCHES	MM
.016	.41	.437	11.10
.03	.8	.531	13 49
.031	.79	2.000	50 80
.062	1.57	2 125	53 98
.125	3.18	2.625	66.68
.164	4 17	3.062	77.77
.188	4.78	3.562	90 47
.375	9.52	4.875	123 82

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm
3 Tolerance on terminal position dimensions is ±.015 (.38 mm).
4 Marking shall be on the side of the case

FIGURE 1 Dimensions and configuration.

(A) denotes change

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When number in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Primary voltage (1-2): 115 volts, 60 hertz.
Secondary voltage:
(3-4): 6.3 volts, 5 amperes rms.
(5-6): 5.0 volts, 2 amperes rms.
(7-11): 670 volts ct, 150 milliamperes dc or 600 volts ct, 165 milliamperes dc.
Working voltage 625 volts peak.
Volt ampere rating 142 volt amperes.

Design and construction
Dimensions and configuration: See figure 1.
Duty cycle. Continuous.
Case. Metal.
Material: Steel.
Terminals Solder lug.
Terminal height .531 ±.031 inch.
Weight. 7 pounds maximum
Operating temperature range -55°C to +130°C.

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage (at sea level): 1,750 volts rms.

Electrical characteristics
No load: With 115 volts, 60 hertz across (1-2), current in (1-2) shall not exceed 450 milliamperes and the power in (1-2) shall not exceed 5 watts.
Voltage across (3-4) 6.76 volts ±3 percent; voltage across (5-6): 5.28 volts ±3 percent; voltage across (7-11): 706 volts ±3 percent; and
(B) voltage across (8-10): 630 volts ±3 percent.
Rated load With 115 volts, 60 hertz across (1-2), the voltage across (3-4) shall be 6 3 volts ±5 percent, across (5-6) shall be 5 volts ±5 percent; across (7-11) shall be 670 volts ±5 percent.
DC resistance:
(1-2): 3.0 ohms maximum.
(3-4) .05 ohm maximum
(5-6) .09 ohm maximum
(7-11) 210 ohms maximum
(8-10): 190 ohms maximum
Polarity Additive, with terminals 2 and 3, 4 and 5, and 6 and 7 connected.

Temperature rise: 40°C with 115 volts rms, 60 hertz across (1-2) at an ambient temperature of 90°C.

Marking location See figure 1.

Part number M27/183-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, WC, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5950-0556-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:46Z
Check the source to verify that this is the current version before use.