
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN, TF4S03AH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation.
MIL-T-27.

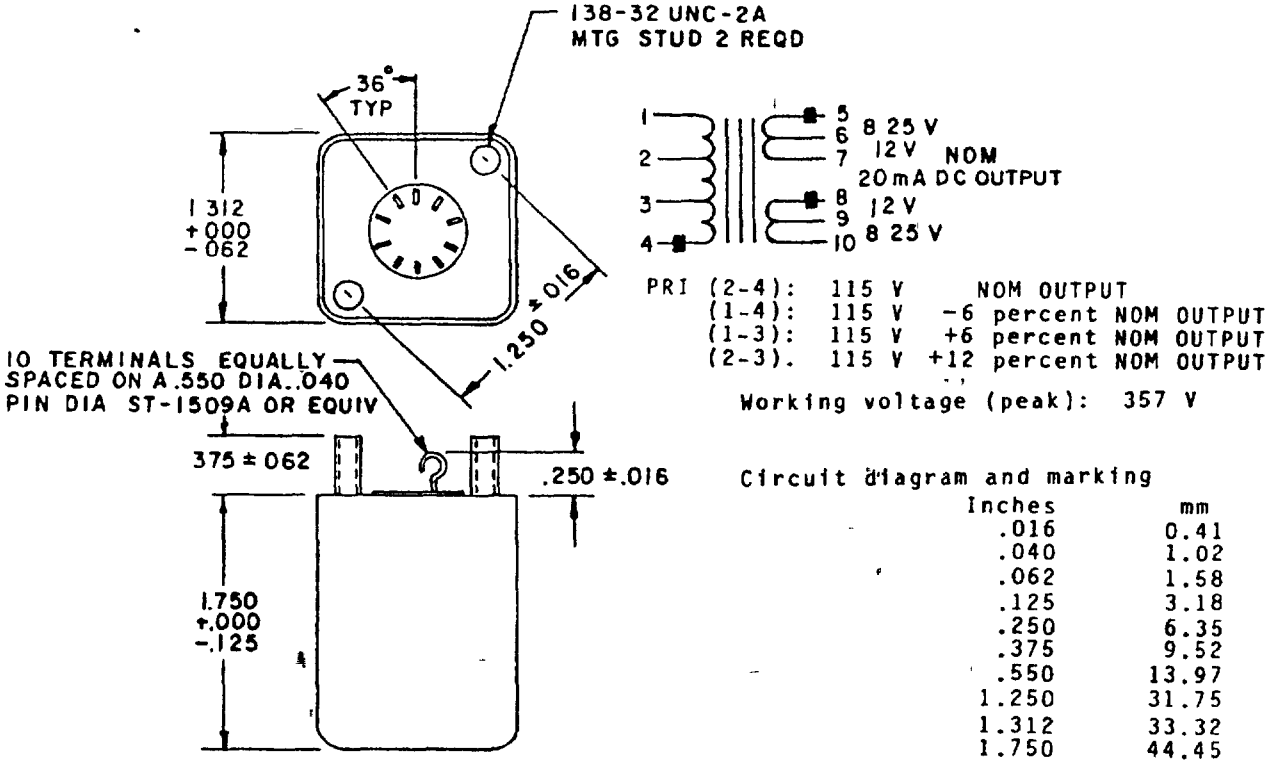

PRI (2-4): 115 V NOM OUTPUT
(1-4): 115 V -6 percent NOM OUTPUT
(1-3): 115 V +6 percent NOM OUTPUT
(2-3). 115 V +12 percent NOM OUTPUT

Working voltage (peak): 357 V

Circuit diagram and marking

Inches	mm
.016	0.41
.040	1.02
.062	1.58
.125	3.18
.250	6.35
.375	9.52
.550	13.97
1.250	31.75
1.312	33.32
1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.016 (0.41 mm).
4. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release;distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS. (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings

TABLE I. Electrical ratings.

Dash no	Primary voltage (rms)	Secondary voltage (rms)			
		(5-6)	(6-7)	(8-9)	(9-10)
01	(2-4): 115 V, 50/60 Hz	8.25	12.0	12.0	8.25
	(1-4): 115 V, 50/60 Hz	7.76	11.28	11.28	7.76
	(1-3): 115 V, 50/60 Hz	8.74	12.72	12.72	8.74
	(2-3): 115 V, 50/60 Hz	9.24	13.44	13.44	9.24

Primary current: 40 milliamperes, maximum.

Secondary current: 20 milliamperes dc output, maximum.

Volt-ampere rating 0.81.

Working voltage (peak): 357 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Metal.

Material: Steel.

Terminals: Hook type, ST-1509A, or equivalent.

Height: 0.250 ±0.016 inch.

Weight: 170 grams, maximum.

Altitude: 50,000 feet maximum.

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (at sea level): 1,000 volts rms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:47Z
Check the source to verify that this is the current version before use.

Electrical characteristics:

No load With 115 volts, 60 Hz across (2-4), current in (2-4) shall not exceed 40 milliamperes and the power in (2-4) shall not exceed 0.75 watt

Voltage across

(5-7)	24.75 ±3 percent.
(8-10).	24.75 ±3 percent.

Ⓑ Rated load With 115 volts, 60 Hz across (2-4), the voltage across (5-7) and (8-10) shall be 21.35 volts ±3 percent

DC resistance:

(1-4)	750 ohms, maximum.
(5-7)	78 ohms, maximum.
(8-10).	88 ohms, maximum.

Polarity: Additive, with (1-5) and (7-8) connected.

Temperature rise: +40°C with 115 volts rms, 60 Hz across (2-4) at an ambient temperature of +90°C.

Marking location. See figure 1.

Ⓑ Part or Identifying Number (PIN): M27/184-01 The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent
DLA - ES

(Project 5950-0765)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:47Z
Check the source to verify that this is the current version before use.