INCH-POUND


MIL-DTL-3628/262A
22 July 2014
SUPERSEDING
MIL-DTL-3628/262
16 June 2014

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, INSTRUCTOR, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

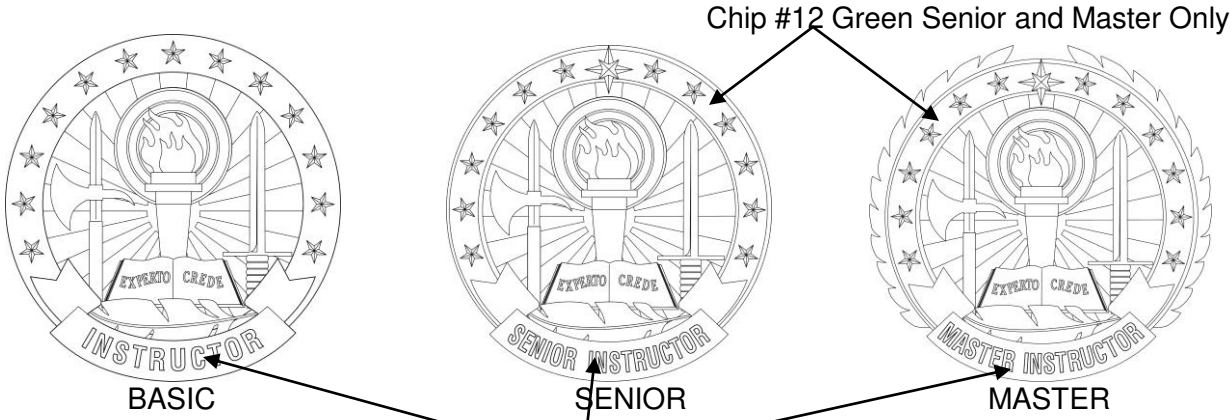

DASH NO.

-1: Basic Color	-2: Basic Subdued
-3: Senior Color	-4: Senior Subdued
-5: Master Color	-6: Master Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

-1: Nickel Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 18.

-2: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.

-3 and -5: 24K Gold Plated, Matte Finish, Polished Highlights and will match TIOH Metal Finish Chip Number 8.

-4 and -6: Dull Flat Brown and shall match the TIOH Metal Finish Chip Number 22.

DIMENSIONS:

HEIGHT:

-1, -2, -3, -4: 2 inches (REF)

-5, -6: 2-1/8 inches (REF)

WIDTH:

-1, -2, -3, -4: 1-15/16 inches (REF)

-5, -6: 2-1/8 inches (REF)

THICKNESS:

-1 through -6: 0.105 ± 0.010 inch (Bottom edge of scroll)

ATTACHING DEVICE:

Attaching device will be three (3) prongs with wing-grip type clutch. Two (2) prongs should be located along a horizontal center line approximately 5/8 inch below the top of the badge, and third prong should positioned along the vertical center line approximately 7/16 inch above the bottom of the badge.

NOTES:

1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: Hard cloisonné enamel may be used in lieu of epoxy resin. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210)

3: A full forcer shall be used.

Epoxy resin will be applied to the Base of the badge as specified below, and must match TIOH Hard Enamel Color Chip Numbers listed.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Black #26	Lettering
Green #12	Outer Ring (Senior and Master Only)

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-263)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.