NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/264D(IH)
19 February 2026
SUPERSEDING
MIL-DTL-3628/264C(IH)
12 November 2024

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, SOLDIER FOR LIFE, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

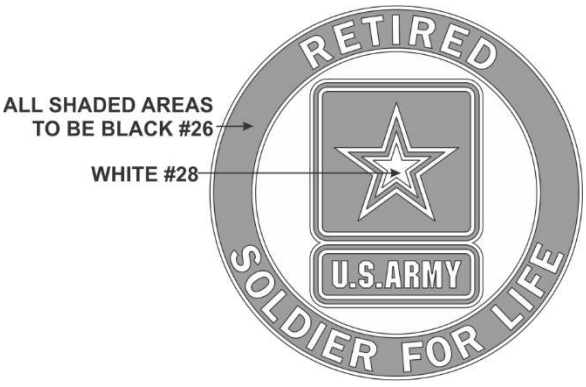

OBVERSE



REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match the Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER: 2 inches (REF)
THICKNESS: 0.082 ± .005 inches

ATTACHING DEVICE:
1. The attaching device shall be a 5/16 inch prong and wing type clutch.

2. A three prong configuration will be used. Two prongs will be place at the top of the badge 1-1/4 inches apart and one prong 1-1/2 inches ± 1/4 inch below them on the vertical centerline. All prongs will be fused or soldered to the badge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

COLOR	CHIP NUMBER
Black	#26
White	#28

NOTES:
1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: The reverse side will have the following inscriptions in block capital letters 3/32 inches high. When viewed by an observer, the lettering will be raised and located along a circular arc at the top and bottom edge of the badge. The top arc will have the words "THE ARMY STAR LOGO IS A REGISTERED TRADEMARK" and the bottom arc will have the words "MADE IN THE U.S.A. The top of the lettering in the arcs will be approximately 1/16 inches in from the outer edge. No reverse die or hub will be furnished. Lettering will be cut into the reverse die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-095)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.