INCH-POUND


MIL-DTL-3628/267
4 February 2016

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, MILITARY FREE FALL COMBAT PARACHUTIST

This specification is approved for use by all
Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest revision of MIL-DTL-3628.

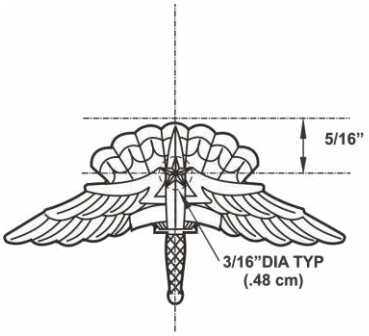



*1ST AWARD*

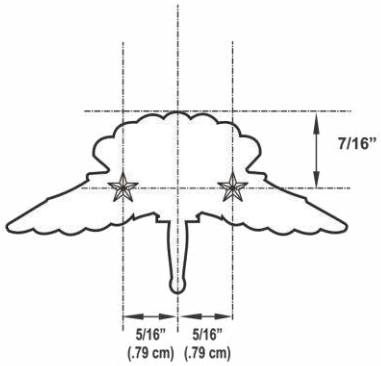



*2D AWARD*

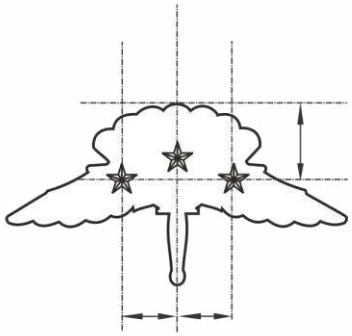

*3D AWARD*

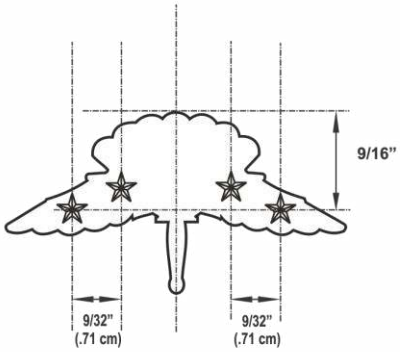


*4TH AWARD*

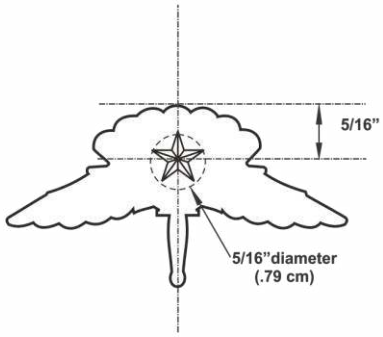


*5TH AWARD*

DASH NO.

-1: Basic Military Free Fall Combat Parachutist
-2: Jumpmaster Military Free Fall Combat Parachutist
-3: Basic Military Free Fall Combat Parachutist, Mini
-4: Jumpmaster Military Free Fall Combat Parachutist, Mini
-5: Basic Military Free Fall Combat Parachutist, Sub.
-6: Jumpmaster Military Free Fall Combat Parachutist, Sub.
-7: Basic Military Free Fall Combat Parachutist, Mini, Sub.
- 8: Jumpmaster Military Free Fall Combat Parachutist, Mini, Sub.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. All Military Free Fall Combat Parachutist Badges shall be manufactured in accordance with the latest revision of MIL-DTL-3628/247 except that star(s) shall be mounted as shown. All basic badges are shown for illustration purposes.

2. Star placement and finish:

a. The stars for first, second, third, and fourth award for -1, -2, -5, -6 shall be 3/16 inch (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch in thickness, and be made from 85/15 red brass. The finish for -1 and -2, shall be copper flashed (unless 95/5 gilding metal is used), oxidized, and relieved. The finish for -5 and -6 dull flat black and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 21.

b. The star for the fifth award for -1, -2, -5 and -6 shall be 5/16 inch (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch in thickness, and be made from 85/15 red brass. The finish for -1 and -2 shall be gold plated, highly polished. The finish for -5 and -6 shall be dull flat black and shall match TIOH Metal Finish Chip Number #21.

c. The stars for first, second, third, and fourth award for -3, -4, -7, -8 shall be 1/8 inch (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch in thickness, and be made from 85/15 red brass. The finish for -3 and -4, shall be copper flashed (unless 95/5 gilding metal is used), oxidized, and relieved. The finish for -7 and -8 dull flat black and shall match TIOH Metal Finish Chip Number #21.

d. The stars for the fifth award for -3, -4, -7, -8 shall be 3/16 inch (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch in thickness, and be made from 85/15 red brass. The finish for -3 and -4, shall be copper flashed (unless 95/5 gilding metal is used), oxidized, and relieved. The finish for -7 and -8 dull flat black and shall match TIOH Metal Finish Chip Number #21.

3. The attaching device for all the star sizes shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch long and shall be formed from 0.010 inch ± 0.002 inch thick flat brass wire 0.040 inch ± 0.002 inch wide. The prong shall be centered on the back of the star. The star shall be mounted on the badge by drilling as many 0.050 inch ± 0.005 inch diameter holes as stars to be mounted in the locations shown. The prongs shall be pushed through the hole(s) so that the star is located in the correct position and the prongs bent over to insure a tight, snug fit.

4. As an alternate method of attachment for -5, -6, -7 and -8, unfinished star(s) may be soldered to the unfinished insignia, and the entire piece finished in the required subdued finish.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - MC

Preparing activity:
Army - IH

Review activities:
Navy - CG1
DLA -CT

(Project No. 8455-2016-218)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.