NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/269B(IH)
19 February 2026
SUPERSEDING
MIL-DTL-3628/269A(IH)
23 August 2021

DETAIL SPECIFICATION SHEET


BADGE, DEFENSE POW/MIA ACCOUNTING AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.



ASSEMBLE

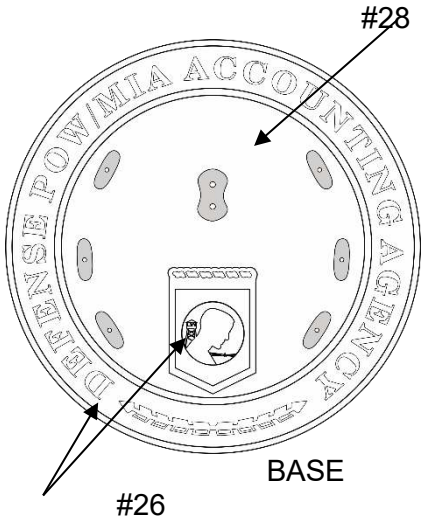

BASE

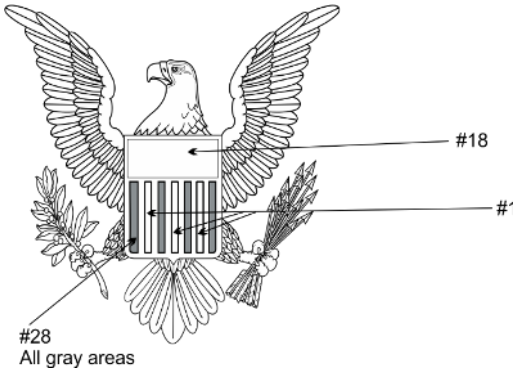

EAGLE DEVICE



WREATH DEVICE

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230)

FINISH:
BASE: Epoxy resin, Nickel Plated, Mirror-like Polish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
DEVICE: Epoxy resin, 24K Gold Plated, Mirror- like Polish and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT -1:
BASE: 2 inches (REF)
EAGLE DEVICE: 23/32 inch (REF)
LEFT WREATH DEVICE: 1-1/4 inches (REF)
RIGHT WREATH DEVICE: 1-1/4 inches (REF)
HEIGHT -2:
BASE: 1-1/2 inches (REF)
EAGLE DEVICE: 17/32 inch (REF)
LEFT WREATH DEVICE: 15/16 inch (REF)
RIGHT WREATH DEVICE: 15/16 (REF)
THICKNESS -1:
BASE: 0.098 ± 0.005 inch
EAGLE DEVICE: 0.077 ± 0.005 inch
LEFT WREATH DEVICE: 0.086 ± 0.005 inch
RIGHT WREATH DEVICE: 0.086 ± 0.005 inch
OVERALL: 0.180 ± 0.010 inch
THICKNESS -2:
BASE: 0.096 ± 0.005 inch
EAGLE DEVICE: 0.073 ± 0.005 inch
LEFT WREATH DEVICE: 0.086 ± 0.005 inch
RIGHT WREATH DEVICE: 0.086 ± 0.005 inch
OVERALL: 0.172 ± 0.010 inch

ATTACHING DEVICE:
1. The attaching device will be three (3) prongs and wing clutch.

2. A three prong configuration will be used. Two prongs will be place at the top of the badge 1-1/4 inches apart and one prong 1-1/2 inches ± 1/4 inch below them on the vertical centerline. All prongs will be fused or soldered to the badge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
Black	#26
White	#28

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The regular size badge has 7 stripes on the eagle device (4 white and 3 red).

3. The miniature badge only has 5 stripes on the eagle device. (3 White and 2 Red)

4. The torse above the MIA/POW symbol will alternate white #28 and black #26.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-097)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:26Z
Check the source to verify that this is the current version before use.