NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/271B(IH)
20 June 2023
SUPERSEDING
MIL-DTL-3628/271A(IH)
27 October 2021

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, DEFENSE HEALTH AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.



ASSEMBLED



BASE
Shaded Area To Be Recessed

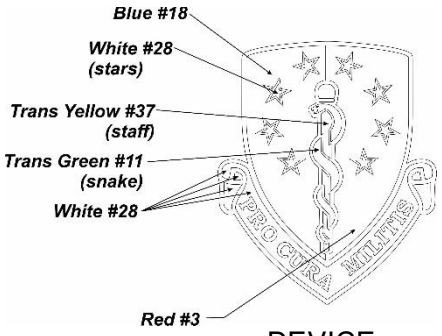

DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:27Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: BASE AND DEVICE: Epoxy resin, 24K Gold Plated, Mirror Like Polish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

DIMENSIONS:
DIAMETER (BASE):
-1: 2 inches (REF)
-2: 1-1/2 inches (REF)
HEIGHT (DEVICE):
-1: 1-5/8 inches (REF)
-2: 1-7/32 inches (REF)
THICKNESS:
BASE: -1, -2: 0.100 inch $\pm$ 0.010 inch
DEVICE: -1, -2: 0.070 inch $\pm$ 0.010 inch
ASSEMBLED (Overall):
-1: 0.143 inch $\pm$ 0.010 inch
-2: 0.138 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. The attaching device for -1, -2 shall be three (3) prongs and wing type clutch.

2. For -1, three prongs shall be located on the reverse, on an approximate 1-3/4 inch diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline at the bottom of the badge. For -2, three prongs shall be located on the reverse, on an approximate 1-1/4 inch diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline at the bottom on the badge.

EPOXY: Epoxy resin shall be applied to the Badge as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. The base shall have floating epoxy and the device shall have stoned epoxy. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS		
COLOR	CHIP #	LOCATION
Red	3	Right side of Device
Green	11	Snake
Blue	18	Left side of Device
White	28	Scroll/Stars of Device
Blue	33	Base
Trans. Yellow	37	Staff

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the lapel button is MIL-DTL-11484/394.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:27Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-162)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:27Z
Check the source to verify that this is the current version before use.