NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/275B(IH)
19 March 2026
SUPERSEDING
MIL-DTL-3628/275A(IH)
14 November 2022

DETAIL SPECIFICATION SHEET


BADGE, MUSIC ENSEMBLE, U.S. PUBLIC HEALTH SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628



BASE

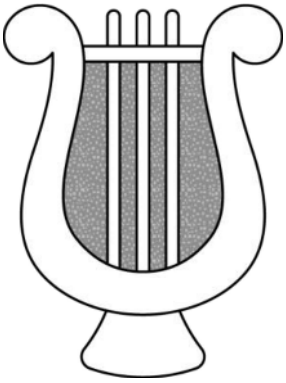

DEVICE



ASSEMBLED

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:28Z
Check the source to verify that this is the current version before use.

FINISH:
BASE: Nickel Plated, Matte Finish, Polished Highlight and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 18.
DEVICE: 24K Gold Plated, Mirror- like Polish and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
DIAMETER: 2 inches (REF)
DEVICE:
HEIGHT: 11/16 inch (REF)
WIDTH: 1/2 inch (REF)
THICKNESS -1:
BASE: 0.115 ± 0.010 inch
DEVICE: 0.063 ± 0.005 inch
ASSEMBLED: 0.178 ± 0.010 inch

ATTACHING DEVICE:
1. The attaching device will be three (3) prongs and wing type clutch.

2. Three prongs shall be located on the reverse, on an approximate 1-3/4 inch diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline and 1/8 inch from the bottom.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonne enamel may be used in lieu of epoxy. If hard cloisonne enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR & CHIPS	**LOCATION**
Blue #18	Base Outer Ring

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device shall be secured to the base using 2 solid brass rivets placed on the vertical center line of the device.

3. Hard cloisonne enamel may be used in lieu of epoxy. If hard cloisonne enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210)

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:28Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

Project No. 8455-2026-210)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:28Z
Check the source to verify that this is the current version before use.