NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/281C
19 March 2026
SUPERSEDING
MIL-DTL-3628/281B
12 July 2024

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION BADGE, U.S. SPACE COMMAND

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

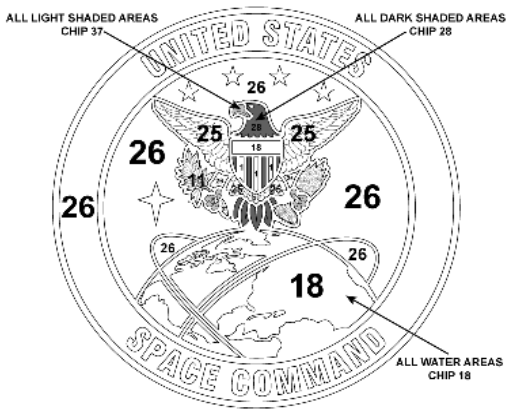

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: (-1 and -2) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (-1 and -2) Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Chip Number 16.

DIMENSIONS:
HEIGHT:
-1: 2 inches (REF)
-2: 1-1/2 inches (REF)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:29Z
Check the source to verify that this is the current version before use.

WIDTH:
-1: 2 inches (REF)
-2: 1-1/2 inches (REF)
THICKNESS:
-1: 0.142 inch ± 0.010 inch
-2: 0.131 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch.

2. Three prongs shall be located on the reverse on 1-3/4 inch diameter circle for -1 and approximate 1-1/4 inch diameter circle for -2. The prongs shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at 1/8 inch from the bottom.

EPOXY: Epoxy resin shall be applied to the Badge as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AND CHIP NUMBER	**LOCATIONS**
Red #1	Alternating Stripes Starting with 2nd
Blue #18	Water Area and Top of Shield
White #28	Eagle Head and Lower Feathers and Alternating Stripes starting with 1st
Green #11	Olive Branch on Right and Left Side of Eagle Claw
Brown #25	Wings on Left and Right Side Shield and Directly below the Shield
Black #26	Background of Scroll and Center Circle
Yellow #37	Eagle's Beak and Claw

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. All epoxy area shall be stoned.

3. The shield of -2 Miniature size has five stipes and -1 Regular size has seven strips.

4. If hard enamel is used then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-214)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:29Z
Check the source to verify that this is the current version before use.