NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/283A
3 October 2024
SUPERSEDING
MIL-DTL-3628/283
2 December 2019

DETAIL SPECIFICATION SHEET

BADGE, OCCUPATIONAL, MUNITIONS IDENTIFICATION BADGE, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

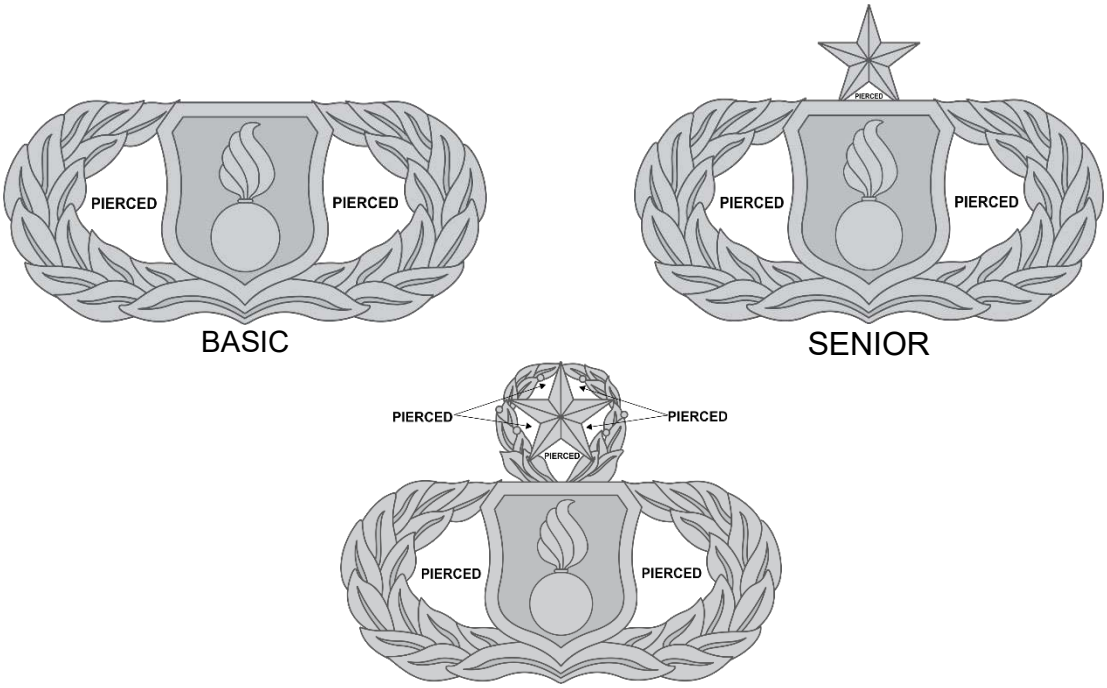

BASIC

SENIOR

MASTER

DASH NO.

-1 Basic, Regular Size	-4 Senior, Mid-Size
-2 Basic, Mid-Size	-5 Master, Regular Size
-3 Senior, Regular Size	-6 Master, Mid-Size

MATERIAL: (-1 Through -6) Red Brass 85/15 (UNS Alloy No. C-230)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:30Z
Check the source to verify that this is the current version before use.

FINISH: (-1 through -6) Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 16.

DIMENSIONS:

HEIGHT:

-1: 3/4 inch (REF)
-2: 9/16 inch (REF)
-3: 1-1/16 inches (REF)
-4: 13/16 inch (REF)
-5: 1-3/16 inches (REF)
-6: 7/8 inch (REF)

WIDTH:

-1: 1-5/8 inches (REF)
-2: 1-1/4 inches (REF)
-3: 1-5/8 inches (REF)
-4: 1-1/4 inches (REF)
-5: 1-5/8 inches (REF)
-6: 1-1/4 inches (REF)

THICKNESS (At thickest point):

-1: 0.107 inch ± 0.005 inch
-2: 0.082 inch ± 0.005 inch
-3: 0.115 inch ± 0.005 inch
-4: 0.098 inch ± 0.005 inch
-5: 0.114 inch ± 0.005 inch
-6: 0.094 inch ± 0.005 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and wing type clutch.

2. The prongs shall be located along the horizontal center line with one centered on each laurel wreath

OBVERSE: The outer wreath shall be modeled. On the center shield, the background shall be recessed and the bomb will be raised and modeled. On the senior badges, the star shall be modeled. On the master badges, the star and wreath shall be modeled with all areas between star and wreath to be pierced.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. A mock forcer may be used to bring up the detail of the bomb.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:30Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-322)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:30Z
Check the source to verify that this is the current version before use.