NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/291
3 January 2022

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, BASE HONOR GUARD, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

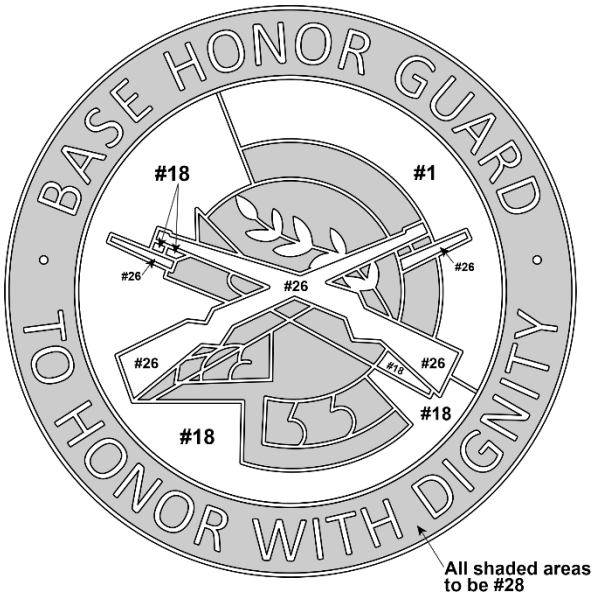

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230)

FINISH: Nickel Plated, Mirror-like Polished Highlights, and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
DIAMETER: 2 inches (REF)
THICKNESS: 0.088 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Three prongs shall be placed on a 1-3/4 inch diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline 1/8 inch from the bottom.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:31Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the badge as indicated above and shall match TIOH Hard Enamel Chip Numbers listed below. All epoxy shall be stoned. If hard enamel is used, then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

COLOR and NUMBER	LOCATION
Red #1	Top of Helmet
Blue #18	Background
Black #26	Rifles
White #28	Outer Scroll and Helmet

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-046)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:31Z
Check the source to verify that this is the current version before use.