NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/300
13 January 2025

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, DIPLOMATIC SECURITY SERVICE, DEPARTMENT OF STATE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.



ASSEMBLED

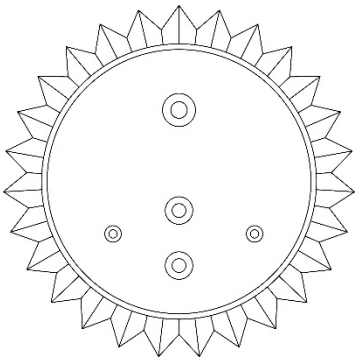

BASE



DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: BASE and DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Gold Plated, Mirror-Like Polish and shall match TIOH Finish Chip number 6.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Finish Chip 8.

DIMENSIONS:
BASE:
DIAMETER:
-1: 2 inches (REF)
-2: 1 1/2 inches (REF)
THICKNESS:
-1: 0.240 ± 0.010 inch
-2: 0.210 ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT:
-1: 1-1/4 inches (REF)
-2: 15/16 inch (REF)
WIDTH:
-1: 1-3/32 inches (REF)
-2: 53/64 inch (REF)
THICKNESS:
-1: 0.160 ± 0.010 inch
-2: 0.160 ± 0.010 inch
ASSEMBLED THICKNESS:
-1: 0.400 ± 0.010 inch
-2: 0.380 ± 0.010 inch

ATTACHING DEVICE:

1. The device shall be attached to the base by rivets and swedged on the reverse.

2. The attaching device for -1, -2 shall be three (3) prongs with wing type clutch.

3. For -1, three prongs shall be located on the reverse, on an approximate 1-3/4 inches diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline at the bottom of the badge. For -2, three prongs shall be located on the reverse, on an approximate 1-1/4 inches diameter circle. Each prong shall be placed 120 degrees apart with the bottom prong located on the vertical centerline at the bottom on the badge.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS		
COLOR	CHIP #	LOCATION
White	28	Inside base area.

NOTES: The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-038)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.