MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL, 50 OHMS, M17/165-00001 AND M17/165-00002

| THIS CABLE USES PVC MATERIAL AND IS NOT TO BE USED IN AEROSPACE APPLICATIONS. |

| NOTE: THE AIR FORCE HAS RESTRICTED THE USE OF PVC IN AEROSPACE AND GROUND SUPPORT APPLICATIONS. CABLES WITH PVC JACKETING SHALL BE USED FOR RETROFIT PURPOSES ONLY UNTIL AN ALTERNATE JACKET IS APPROVED. |

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable described herein shall consist of this specification and the latest issue of MIL-C-17.

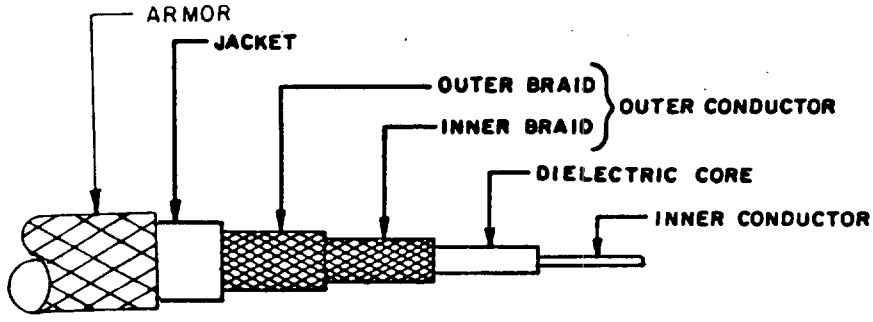


FIGURE 1. Configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:22Z
Check the source to verify that this is the current version before use.

TABLE I. Description.

Component	Construction details
Inner conductor	Solid bare copper wire. Overall diameter: 0.106 inch ±0.001.
Dielectric core	Type A-1: Solid polyethylene. Diameter: 0.370 inch ±0.010.
Outer conductor: Inner braid Outer braid	Double braid of AWG No. 33 bare copper wire. Diameter: 0.463 inch maximum. Coverage : 94.8% nominal Carriers : 24 Ends : 10 Picks/inch: 5.4 ±10% Coverage : 93.6% nominal Carriers : 24 Ends : 8 Picks/inch: 10.6 ±10%
Jacket	Type IIa: PVC. Diameter: 0.545 inch ±0.010.
Armor (inactive for new design) M17/165-00002	Overall diameter: .615 inch maximum

CAUTION IS DIRECTED TO THE APPLICATION OF THIS CABLE ABOVE 400 MHZ. ATTENUATION IS TESTED ONLY AT 400 MHZ. SRL AND POWER HANDLING CAPABILITIES ARE NOT STIPULATED HEREIN.

ENGINEERING INFORMATION:

Continuous working voltage: 5,200 V rms, maximum.

Velocity of propagation: 65.9 percent, nominal.

Operating temperature range: -40°C to +85°C.

Inner conductor properties:

DC resistance (maximum at 20°C): 0.0941 ohm per 100 feet.

(A) Elongation: 30 percent, minimum.

Tensile strength: Not applicable.

Engineering note: This cable is useful in general purpose, medium low temperature applications. (See connector series "N" and "SC" per MIL-C-39012.)

REQUIREMENTS:

Dimensions, configuration, and description: See figure 1 and table I.

Environmental and mechanical:

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:22Z
Check the source to verify that this is the current version before use.

Visual and mechanical:

Out-of-roundness: Not applicable.

Eccentricity: 10 percent, maximum.

Adhesion of conductors:

(A) Inner conductor to core: 15 pounds, minimum; 150 pounds, maximum.

Aging stability: +98°C ±2°C.

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

(A) Cold bend: -40°C ±2°C.

Dimensional stability: +85°C ±2°C.

Inner conductor from core: 0.125 inch, maximum.

Inner conductor from jacket: 0.250 inch, maximum.

Contamination: Applicable.

Bendability: Not applicable.

Flammability: Not applicable.

(A) Weight: 0.225 pound per foot, maximum.

Electrical:

Continuity: Applicable.

(A) Spark test: 8,000 V rms, +10%, -0%.

(A) Voltage withstanding: 12,000 V rms, +10%, -0%.

Insulation resistance: Not applicable.

Corona extinction voltage: 7,000 V rms, minimum.

Characteristic impedance: 50 ohms ±2.

Attenuation: 3.8 dB/100 ft maximum at 400 MHz.

Structural return loss: Not applicable.

(A) Capacitance: 32.2 pF per foot, maximum.

Capacitance stability: Not applicable.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part number: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:22Z
Check the source to verify that this is the current version before use.

Supersession data: See table II.

TABLE II. Cross-reference of part number.

Part number	Superseded part number or type designation
M17/165-00001	RG-217/U per MIL-C-17D; RG-14A/U per MIL-C-17/9 (canceled)
M17/165-00002	RG-224/U per MIL-C-17/85B

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, TD
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0911-39)

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/23276

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:22Z
Check the source to verify that this is the current version before use.