FED SUP CLASS
2920

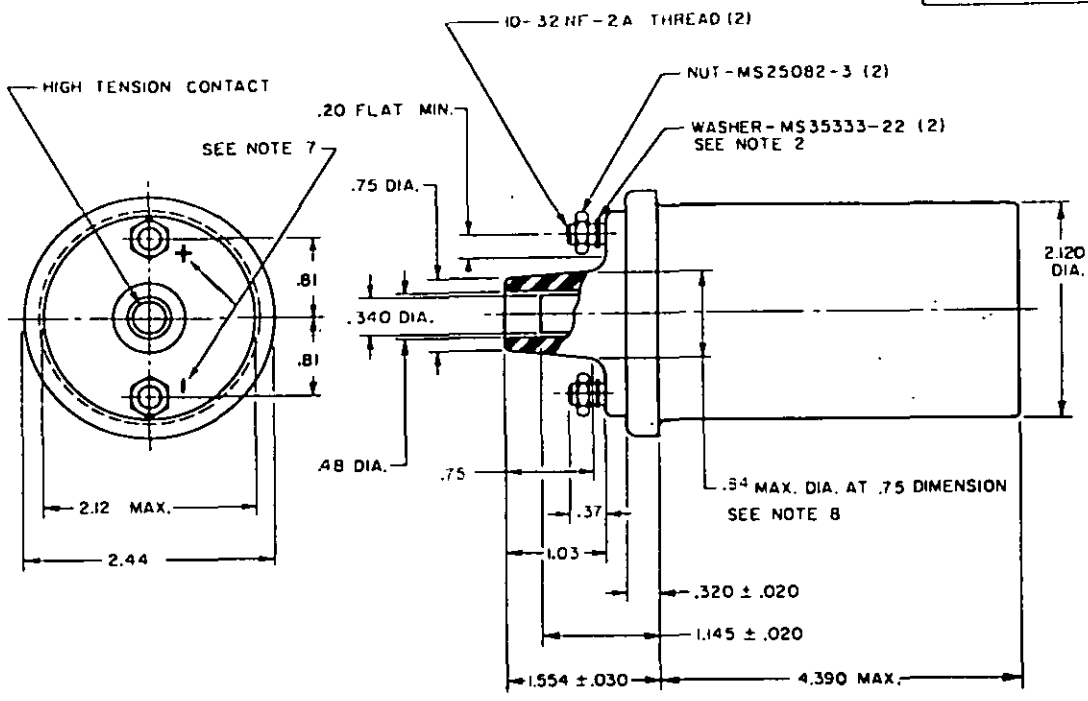

REVIEW ACTIVITY: NAVY-MC
USER ACTIVITIES: ARMY-EL,GL, ME, MU

Ⓐ

NOTES:

1. THIS OIL FILLED COIL IS DESIGNED FOR USE WITH AN EXTERNAL BALLAST RESISTANCE IN DISTRIBUTORS CONFORMING TO REFERENCED SPECIFICATION.
2. MANUFACTURER'S DESIGN WILL BE ACCEPTABLE IN PLACE OF WASHER MS35333-22 IF INTERCHANGEABILITY AND FUNCTION ARE NOT AFFECTED.
3. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: ± .01 ON 2 PLACE DECIMALS AND ±.005 ON 3 PLACE DECIMALS.
4. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
5. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
7. MARKING: TERMINAL POLARITY SHALL BE CLEARLY AND PERMANENTLY IDENTIFIED ADJACENT TO THE TERMINAL. THE MS PART NUMBER SHALL BE APPLIED TO THE PART IN ACCORDANCE WITH MIL-STD-130.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS. TOWER MUST BE MAINTAINED WITHIN ALL SPECIFIED LIMITS, REGARDLESS OF FORM.

REVISED Ⓐ 7 JULY 1967
APPROVED 16 SEP 1958

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REDRAWN

MS PART NO.	FORMER PART NO.
MS 51115-1	7539563

PREPARING ACTIVITY: ARMY-AT (Other Cust)	TITLE: COIL, IGNITION: 24 VOLT DC (WITHOUT INTERNAL BALLAST)	MILITARY STANDARD MS 51115
SUPERSEDING SPECIFICATION: MIL-D-13791	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:58Z
Check the source to verify that this is the current version before use.