FED. SUP CLASS
2590

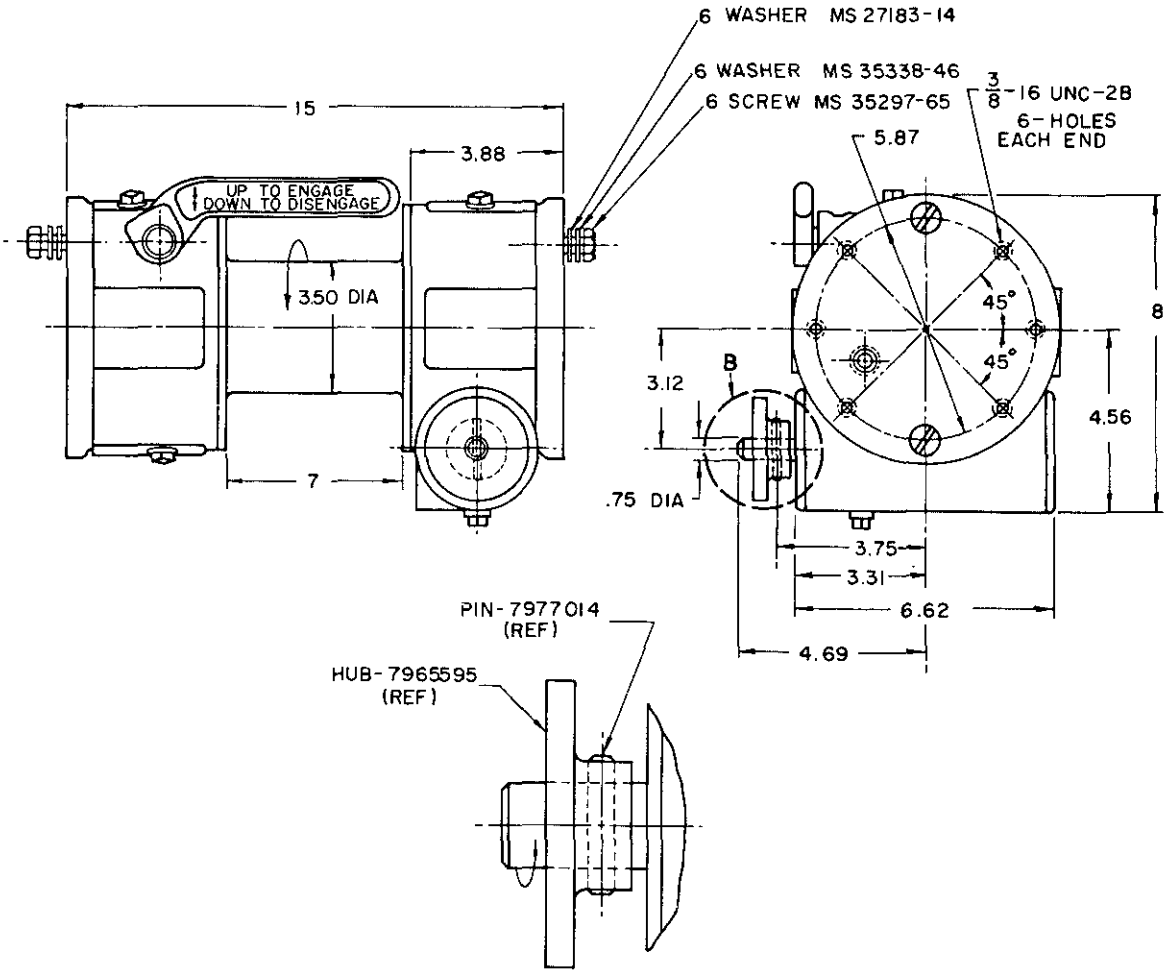


ENLARGED VIEW B.

NOTES:

1. ENGINEERING DATA BASED ON WINDING SPEED OF 15 FEET PER MINUTE ON BARE DRUM, RATED LOAD, AND ASSUMED 50% EFFICIENCY:

| | |
|---|---|
| RPM-INPUT SHAFT | 739 |
| TORQUE-INPUT SHAFT | 290 INCH POUNDS |
| GEAR RATIO | 50 TO 1 |
| CABLE SIZE | 3/8 INCH |
| CABLE LENGTH | 100 FEET |
| WEIGHT | 85 POUNDS |

2. THIS WINCH SHALL CONFORM TO TYPE II, CLASS 3 OF MIL-W-46735.
3. DIMENSIONS SHOWN ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. MARKING SHALL CONSIST OF THE MS PART [illegible] ACCORDANCE WITH [illegible]

(B) CANCELLED AFTER 29 OCTOBER 1982.
NO SUPERSEDING STANDARD.

| MS PART NO. | REF. DWG NO. |
|---|---|
| MS 51351-1 | 7980420 |

| | | |
|---|---|---|
| P.A. ARMY-AT<br>Other Cust | TITLE<br>WINCH, DRUM, VEHICLE MOUNTING: BASIC, END MOUNT, MECHANICALLY DRIVEN, 5000 LB. CAP. | MILITARY STANDARD<br>MS 51351 (AT) |
| PROCUREMENT SPECIFICATION<br>MIL-W-46735 | SUPERSEDES. | SHEET 1 OF 2 |

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2590-N/A

APPROVED 27 JAN 1961 REVISED (A) 11 NOVEMBER 1966 (B) 29 OCT 82

USER ACTIVITY: ARMY-ME

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034-341

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.