MILITARY SPECIFICATION SHEET


CAPACITORS, VARIABLE, VACUUM OR GAS DIELECTRIC

STYLE CG60

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of MIL-C-23183.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

GLASS ENVELOPE UNITS INACTIVE FOR NEW EQUIPMENT DESIGN AFTER DATE OF THIS SPECIFICATION

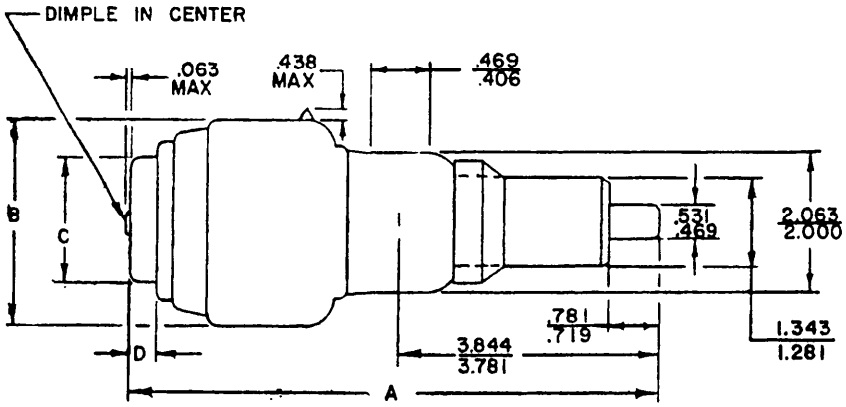

INCHES	MM
.063	1.59
.406	10.32
.438	11.11
.469	11.91
.531	13.49
.719	18.26
.781	19.84
1.281	32.54
1.343	34.11
2.000	50.80
2.063	52.39
3.781	96.04
3.844	97.63

For dimensions A, B, C, and D, see table I.

FIGURE 1. Style CG60 capacitor.

Ⓐ DENOTES CHANGE

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:48Z
Check the source to verify that this is the current version before use.

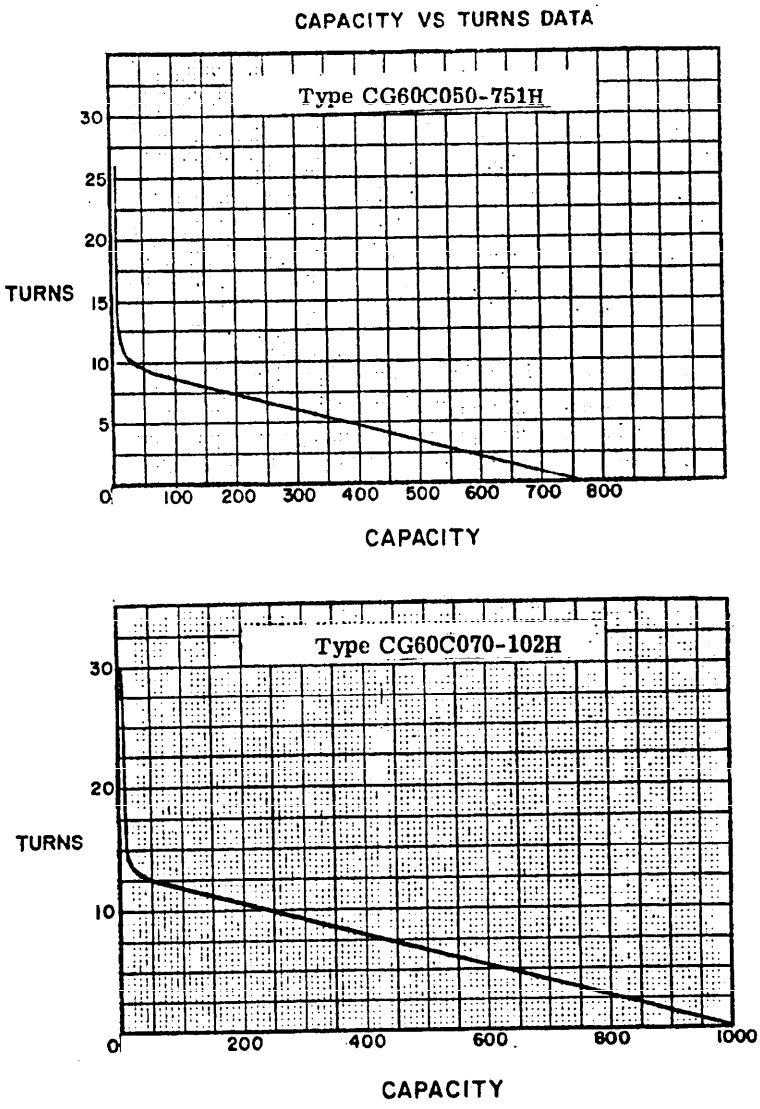
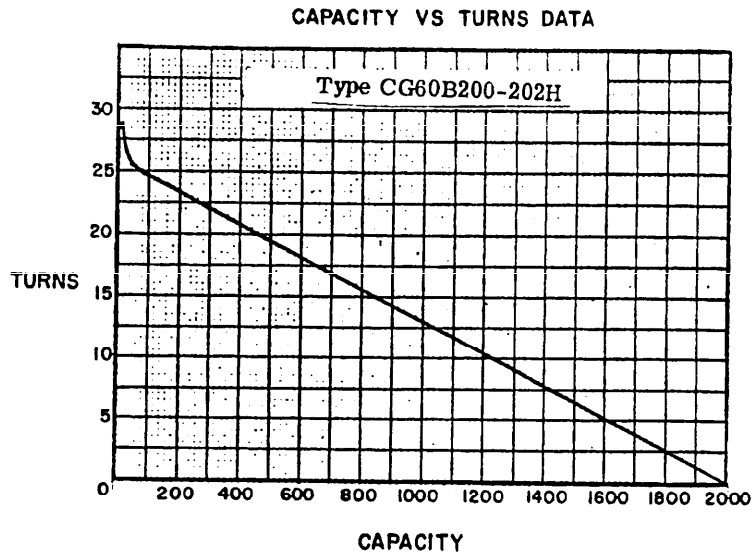


FIGURE 2. Capacitance change vs rotation.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T15:48Z
Check the source to verify that this is the currentversion before use.



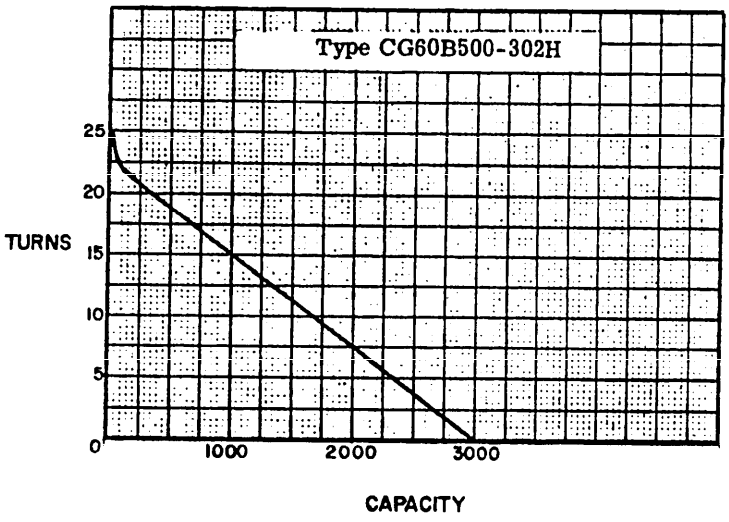


FIGURE 2. Capacitance change vs rotation - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration - See figure 1 and table I.

Ⓐ Envelope - Glass or ceramic.

Peak rated voltage - See table I.

Rated current (rms) - 42 amperes.

Operating temperature range - -55°C to +85°C.

Capacitance - See table I.

Ⓐ Mechanical adjustments:

Torque:

End-stops - 160 inch-ounces minimum.

Tuning shaft - 3 inch-ounces minimum; 25 inch-ounces maximum.

Capacitance change vs rotation: In accordance with MIL-C-23183.

Vibration: Method 201 of MIL-STD-202. In accordance with MIL-C-23183.

Ⓐ Life: In accordance with MIL-C-23183 except that type CG60B200-202H shall be tested at 3,500 cycles.

Ⓐ TABLE I. Style CG60 capacitors.

Type designation	Voltage peak	Capacitance range	Dimensions							
			A		B		C		D	
			Min	Max	Min	Max	Min	Max	Min	Max
	kV	pF								
CG60C050-751H	3	5-750	7.500 (190.50)	8.000 (203.20)	2.938 (74.61)	3.063 (77.79)	1.781 (45.24)	1.844 (46.83)	.344 (8.73)	.406 (10.32)
CG60C070-102H	3	7-1,000	7.438 (188.91)	7.938 (201.61)	2.938 (74.61)	3.063 (77.79)	1.781 (45.24)	1.844 (46.83)	.344 (8.73)	.406 (10.32)
CG60B200-202H	2	20-2,000	8.063 (204.79)	8.438 (214.31)	2.938 (74.61)	3.063 (77.79)	2.000 (50.80)	2.063 (52.89)	.344 (8.73)	.406 (10.32)
CG60B500-302H	2	50-3,000	8.000 (203.20)	8.375 (212.73)	3.438 (87.31)	3.563 (90.49)	2.000 (50.80)	2.063 (52.89)	.719 (18.26)	.781 (19.84)

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm to the nearest .01 millimeter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:48Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU, EL
Navy - EC
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - None
Navy - AS, OS, MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1009-5)

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20261O-19T15:48Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-19T15:48Z
Check the source to verify that this is the current version before use.