MILITARY SPECIFICATION

AMPLIFIER, PNEUMATIC

This specification is approved for use within the Army Missile Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification defines requirements for one type of pneumatic amplifier to be used for boosting pneumatic pressure to 10,000 pounds per square inch (psi) and controlling the output pressure from 0 to 10,000 psi.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadium (Electrodeposited)

MILITARY

DOD-D-1000	Drawings, Engineering and Associated Lists
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT, General Requirements for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-A-8625	Anodic Coatings, For Aluminum and Aluminum Alloys

STANDARDS

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-794	Parts and Equipment, Procedures for Packaging of
MIL-STD-889	Dissimilar Metals
MS33656	Fitting End, Standard Dimensions for Flared Tube Connection and Gasket Seal

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.2).

3.2 Materials. Materials to be used in the construction of the pneumatic amplifier shall be as specified herein. Material not definitely specified shall be of a good commercial quality suitable for the design requirement and free from all defects. Dissimilar metals as defined by MIL-STD-889 shall not be in contact, unless protection against galvanic corrosion is applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.2.1 Nonmetallic material. Nonmetallic materials shall be compatible with the pneumatic media and intended temperature, service and storage conditions to which the pneumatic amplifier will be exposed.

3.2.2 Nonferrous material. Nonferrous material shall be used in construction of the pneumatic amplifier, except where ferrous material is dictated by design requirements. Magnesium base alloys shall not be used.

3.2.3 Protective coatings. Materials used that are subject to deterioration, when exposed to environmental conditions that may occur during service usage, shall be protected against such deterioration in a manner that will not prevent compliance with the performance requirements of this specification. Metal surfaces that are of corrosion resistant material on which a protective coating would be detrimental to proper functioning, shall not be coated. Exposed metal surfaces and protected metal surfaces on which a protective coating will not be detrimental shall be treated to the requirements of this specification.

3.2.3.1 Aluminum alloys. Aluminum alloys shall be treated with anodic coatings in accordance with MIL-A-8625.

3.2.3.2 Ferrous alloys. Ferrous alloys shall be cadmium plated in accordance with QQ-P-416 type II or type III, as applicable, and of a class that is adequate to achieve the degree of protection required.

3.2.4 Selection of materials. Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with the order of precedence specified in MIL-STD-143, except as provided in the following paragraph.

3.2.5 Standard parts. Standard parts (MS and AN) shall be used wherever they are suitable for the purpose, and shall be identified on the drawing by their part number. Commercial utility parts such as screws, bolts, nuts, cotter pins, etc., may be used, provided they possess suitable properties and are replaceable by the standard parts (MS and AN) without alteration, and provided the corresponding standard part numbers are referenced in the parts list and, if practicable, on the contractor's drawings. In the event there is not suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

3.3 Design. The pneumatic amplifier shall be designed to require not more than 1000 pounds per square inch (psi) input pressure to boost and control an output pneumatic pressure from 0 to 10,000 psi. Normal inlet pressure shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

be 3000 psi. The pneumatic amplifier shall consist of a pressure intensifier, pressure regulator, driving pressure gauge, accumulator, vernier control, pressure control valve, vent control valve, three-way valve, filter, input port, output ports, accumulator pressure gauge and associated plumbing contained in a case in accordance with figure 1. Metric equivalents shall be acceptable for all units of measure.

3.3.1 Pressure intensifier ratio and displacement volume. The minimum area ratio of the pressure intensifier shall be 10 to 1. The minimum displacement volume of the high pressure side shall not be less than 20 cubic centimeters (cc). The maximum displacement volume of the low pressure side shall not exceed 220 cc (see 4.6.1.1).

3.3.2 Pressure intensifier seals. The pressure intensifier seals shall be of a design and material compatible with the pneumatic media and the design pressures (see 4.6.1.1).

3.3.3 Pressure intensifier cycle time. The pressure intensifier shall make one complete cycle in 5 seconds or less (see 4.6.2).

3.3.4 Accumulator. The pneumatic amplifier shall have an accumulator with a volume of 47.5 + 7.5 cc. The accumulator shall be cylindrical with fittings on each end (see 4.6.1.1).

3.3.4.1 Accumulator pressure gauge. The pneumatic amplifier shall have a pressure gauge installed as shown schematically in figure 1. The gauge shall have a 4.5 inch dial size with a range of 0 to 10,000 psi. Major graduations shall be at 1,000 psi intervals with interim graduations no greater than 50 psi. Gauge accuracy shall be 0.50 percent full scale. The gauge shall have a mirrored dial and adjustable pointer. The case shall be solid front, blowout back configuration (see 4.6.1.1).

3.3.5 Charge and exhaust valve. A manual three-way valve shall be incorporated in accordance with figure 1, to change the pneumatic amplifier from charge to exhaust functions of the operational cycle (see 4.6.1.1).

3.3.6 Pressure and vent control valves. The pressure and vent control valves shall be micro metering valves with replaceable seats. Maximum operating torque shall not exceed 2 inch pounds (in lbs) at 10,000 psi (see 4.6.1.1).

3.3.7 Overpressure protection. The pneumatic amplifier shall be protected from overpressure with a relief valve set not to exceed 10,500 psi (see 4.6.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.3.8 Pressure regulator. A pressure regulator shall regulate the inlet driving pressure to the pressure intensifier. The regulator output pressure and flow range shall be great enough for the intensifier to reach an output pressure of 10,000 psi within the cycle requirements of 3.3.3. Maximum operating torque of the regulator shall not exceed 30 in lbs (see 4.6.2).

3.3.9 Driving pressure gauge. The pneumatic amplifier shall have a pressure gauge installed as shown schematically in figure 1, to indicate the pressure applied to the low pressure end of the intensifier. The gauge shall have a 2.0 inch dial size with a range of 0 to 5,000 psi. Major graduations shall be at 100 psi intervals with interim graduations at 20 psi. Gauge accuracy shall be 3.0 percent full scale (see 4.6.1.1).

3.3.10 Muffler. The exhaust of the charge and exhaust valve shall have a muffler installed limiting noise levels to 94 decibels at any exhaust rate when measured 1.0 foot from the pneumatic amplifier (see 4.6.1.1).

3.3.11 Filter. The pneumatic amplifier inlet shall be equipped with a 10 micron filter. The filter shall be easily removed for cleaning (see 4.6.1.1).

3.3.12 Check valves. Check valves shall be incorporated in the high pressure head of the intensifier to prevent reverse flow as shown schematically in figure 1.

3.3.13 Inlet fitting. The pneumatic amplifier inlet fitting shall be in conformance with MS33656E4. The fitting shall be secured to the left end of the amplifier toward the rear of the case and be equipped with a captive dust plug.

3.3.14 Outlet fitting. The pneumatic amplifier shall have two quick-disconnect outlet ports equipped with captive dust plugs. The mating halves of the quick-disconnects shall have internal super pressure fittings (0.25 in nominal) on the opposite ends.

3.3.14.1 Outlet fitting location. One outlet port shall be on top of the case approximately 2 inches from the front edge and 7 inches from the end of the second port. The second port shall be on the end opposite the inlet port. The center line of this port shall be 4 $\pm$ 0.1 inch from the bottom of the case.

3.3.14.2 Adapters. The pneumatic amplifier shall be equipped with ten adapters for the outlet ports. One end of each adapter shall have an external super pressure fitting (0.25 in nominal). The other end shall be in accordance with table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

TABLE I. Adapter end fitting.

Nominal size (in)	Thread
0.125 - 27	NPT, external
0.125 - 27	NPT, internal
0.25 - 18	NPT, external
0.25 - 18	NPT, internal
0.375 - 18	NPT, external
0.375 - 18	NPT, internal
0.50 - 14	NPT, external
0.50 - 14	NPT, internal
MS33656E4	external, straight
0.25 (nominal)	superpressure, external

3.3.15 Vernier control. The pneumatic amplifier shall have a vernier control to be used to make final pressure adjustments with the test circuit isolated. The control shall have internal valving to allow control throughout the range of 0 to 10,000 psi. Automatic relief shall be included to prevent the trapping of high pressure gas.

3.4 Construction. The pneumatic amplifier shall be constructed to withstand the strains, jars, vibrations and other conditions incident to shipping, storage, installation and service use.

3.4.1 Screw threads. Machine screw threads shall conform to MIL-S-7742, class 2.

3.4.2 Pipe threads. Pipe threads shall conform to MIL-P-7105.

3.4.3 Valves, fittings and tubing. Valves, fittings and tubing shall be corrosion resistant steel.

3.4.4 Accumulator. The accumulator shall be corrosion resistant steel.

3.4.5 Pressure intensifier. The intensifier cylinder and low pressure end cap shall be aluminum; the piston and high pressure head shall be corrosion resistant steel.

3.4.6 Case. The case shall be a steel weldment. The case shall be designed to contain rupturing of system components. The upper part of the case shall be removable to access the amplifier system parts for service. The case outside dimensions shall not exceed 8 inches high by 13 inches deep by 24 inches wide including outlet ports.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.4.6.1 Case holddown. The case shall be designed so that it can be permanently installed on a work bench. Suitable attachments shall be supplied.

3.4.7 Weight. The maximum weight of the pneumatic amplifier shall not exceed 55 pounds.

3.4.8 Burst pressure. The high pressure side of the pneumatic amplifier system shall be designed for a minimum burst of 40,000 psi; the low pressure side of the system shall be designed for a minimum burst pressure of 10,000 psi.

3.4.9 Marking. The pneumatic amplifier shall be marked in accordance with MIL-STD-130.

3.4.9.1 Front panel marking. Each component shall be labeled as to its function in the system.

3.4.10 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in the manufacturer's part number shall be governed by the drawing number requirements of DOD-D-1000.

3.4.11 Workmanship. The pneumatic amplifier, including all parts and accessories, shall be fabricated and finished in accordance with high grade commercial practice. There shall be no defects, burrs, cracks, sharp edges or blemishes (see 4.6.1).

3.5 Performance characteristics. With an inlet pressure of 3,000 psi the pneumatic amplifier shall boost the outlet pressure to 10,000 psi (see 4.6.2).

3.5.1 Leak rate. There shall be no leakage at full operating pressure of 10,000 psi. With the outlet ports capped and the pneumatic amplifier stabilized at 10,000 psi for 15 minutes there shall be no pressure decrease for a 1 hour period, after correcting for temperature change (see 4.6.3).

3.5.2 Operational environment. The pneumatic amplifier shall operate satisfactorily in the following environment (see 4.3.2):

a. Room temperature, 19° Celsius (C) to 24°C.

b. Pneumatic media temperature, 0°C to 50°C.

c. Relative humidity, 20 percent to 50 percent.

d. Altitude, 0 to 10,000 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.5.3 Nonoperational environment. The pneumatic amplifier shall operate satisfactorily after being returned to an operational environment from the environment specified herein (see 4.6.4):

a. Stored for 48 hours at -55°C.

b. Stored for 48 hours at +60°C.

c. Stored for 48 hours at an altitude of 40,000 feet.

d. Stored for 48 hours at a relative humidity of 100 percent.

e. Stored for 48 hours at a relative humidity of 0 percent.

3.5.4 Vibration. The unit when packaged for shipment shall be capable of operating satisfactorily after being subjected to vibration with the frequency varying logarithmically between 5 to 500 Hertz (Hz) at the following levels (see 4.6.5):

a. 5 to 27 Hz, 1.3 gravity units (g) $\pm$ 0.05 g.

b. 27 to 52 Hz, 0.036 $\pm$ 0.001 inches double amplitude.

c. 52 to 500 Hz, 5.0 g $\pm$ 0.05 g.

3.5.5 Shock. The pneumatic amplifier when packaged for shipment shall be capable of operating satisfactorily after being subjected to a vertical and lateral shock of 15 g half sine pulse with a duration of 11 milliseconds (see 4.6.6).

3.5.6 Service life. The pneumatic amplifier shall have a minimum maintenance free life of 45,000 cycles varying in pressure from 0 to 10,000 psi at a rate of 2 cycles per minute. The system shall have an indefinite life except for periodic maintenance (see 4.6.7).

3.5.7 Proof pressure. The pneumatic amplifier shall operate satisfactorily after being subjected to a proof pressure of 4,000 psi on the low pressure system and a proof pressure of 15,000 psi on the high pressure system (see 4.6.8).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Test equipment and inspection facilities. The manufacturer shall insure that test and inspection facilities of sufficient accuracy, quality and quantity are established and maintained to permit performance of required inspections.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the conditions of 4.3.1 and 4.3.2 of this specification.

4.3.1 Cleaning. Prior to inspection the pneumatic amplifier shall be thoroughly degreased, cleaned and kept free of oil or other flammable compounds. The pneumatic amplifier shall be maintained in this condition.

4.3.2 Room temperature and pressure. Unless otherwise specified, all inspections and tests shall be conducted with the pneumatic amplifier at the conditions specified in 3.5.2.

4.4 First article inspection. First article inspection shall consist of the examination and tests as specified under 4.6 and shall be conducted in the order specified in 4.4.1. Quantity production shall be withheld until the first article sample has been pronounced satisfactory by the procuring activity (see 3.1 and 6.2).

4.4.1 First article sample. The first article sample shall consist of one pneumatic amplifier, representative of the production product. The first

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

article sample shall be subjected to inspections and tests specified in table II in the order shown.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test method paragraph
Examination of product	3.4.6, 3.4.7 & 3.4.11	4.6.1
Performance characteristics	3.5	4.6.2
Leak rate	3.5.1	4.6.3
Nonoperational environment	3.5.3	4.6.4
Vibration	3.5.4	4.6.5
Shock	3.5.5	4.6.6
Service life	3.5.6	4.6.7
Proof pressure	3.5.7	4.6.8

4.5 Quality conformance inspection. The quality conformance inspection shall consist of individual inspection and test on each pneumatic amplifier.

4.5.1 Inspection and tests. Each pneumatic amplifier shall be subjected to the inspection and tests specified in table III in the order shown.

TABLE III. Quality conformance inspection.

Inspection	Requirement paragraph	Test method paragraph
Examination of product	3.4.6, 3.4.7 & 3.4.11	4.6.1
Performance characteristics	3.5	4.6.2
Leak rate	3.5.1	4.6.3
Proof pressure	3.5.7	4.6.8

4.5.2 Noncompliance. If a pneumatic amplifier fails to pass inspection it may be reworked to correct defects, and resubmitted for inspection. Before reinspection, full particulars concerning the noncompliance and the action taken to correct the defects shall be furnished to the procuring activity.

4.5.3 Inspection of packaging. Preservation, packing and marking shall be inspected for conformance to section 5.

4.6 Methods of inspection.

4.6.1 Examination of product. Each pneumatic amplifier shall be visually and dimensionally inspected and weighed to determine conformance with the requirements of this specification (see 3.4.6, 3.4.7 and 3.4.11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

4.6.1.1 Verification of requirements. Verification shall consist of certification supported by verifying data that the requirements of 3.3.1, 3.3.2, 3.3.4, 3.3.4.1, 3.3.5, 3.3.6, 3.3.7, 3.3.9, 3.3.10 and 3.3.11 are in accordance with this specification (see 6.2).

4.6.2 Performance characteristics. With 3,000 psi applied to the inlet port and the outlet ports capped, the pneumatic amplifier shall be operated over a range of outlet pressures from 0 to 10,000 psi (see 3.3.3 and 3.5.1).

4.6.3 Leak rate. With 3,000 psi applied to the inlet port and the outlet ports capped, the pneumatic amplifier shall be operated to 10,000 psi and maintained for 1 hour. There shall be no decrease in pressure (see 3.5.1).

4.6.4 Nonoperational environment. The pneumatic amplifier shall be subjected to each of the environmental conditions of 3.5.3. At the end of each 48 hour period the pneumatic amplifier shall be stabilized at the conditions of 3.5.2 and functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.5 Vibration. The pneumatic amplifier shall be subjected to the vibration levels of 3.5.4. At the end of the vibration environment the pneumatic amplifier shall be functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.6 Shock. The pneumatic amplifier shall be subjected to the shock levels of 3.5.5. At the end of the shock environment the pneumatic amplifier shall be functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.7 Service life. The pneumatic amplifier shall be cycled to the requirements of 3.5.6. At the end of 45,000 cycles the pneumatic amplifier shall be functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.8 Proof pressure. The pneumatic amplifier shall be subjected to the proof pressure requirements of 3.5.7 and then functionally tested in accordance with 4.6.2 and 4.6.3.

5. PACKAGING

5.1 Preservation. Preservation shall be level C of MIL-STD-794.

5.1.1 Cleaning and drying. Cleaning and drying shall be in accordance with MIL-STD-794.

5.1.2 Preservative applications. Preservatives shall not be used.

5.2 Packing. Packing shall be level C of MIL-STD-794.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Level C. In addition to any special or other identification marking required by the contract (see 6.2) each container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The pneumatic amplifier is intended for use with a pneumatic media of water pumped nitrogen in a laboratory environment.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Whether first article sample is required (see 3.1).

c. Applicable level of preservation, packaging and packing required (section 5).

d. Level of identification and marking required (see 3.4.9 and 5.3).

e. Type of enclosure for amplifier adapters.

f. Whether certification is required (see 4.6.1.1).

6.3 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examination, approval of first article test results and disposition of first article. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Safety shield assembly. Operation of the pneumatic amplifier requires the use of a safety shield assembly. New or replacement safety shield assemblies can be procured separately in accordance with Army Drawing Number 7916967 (FSCM 18876).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Amplifier, pneumatic
Fluidic amplifier
Pneumatic intensifier

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4931-A227)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

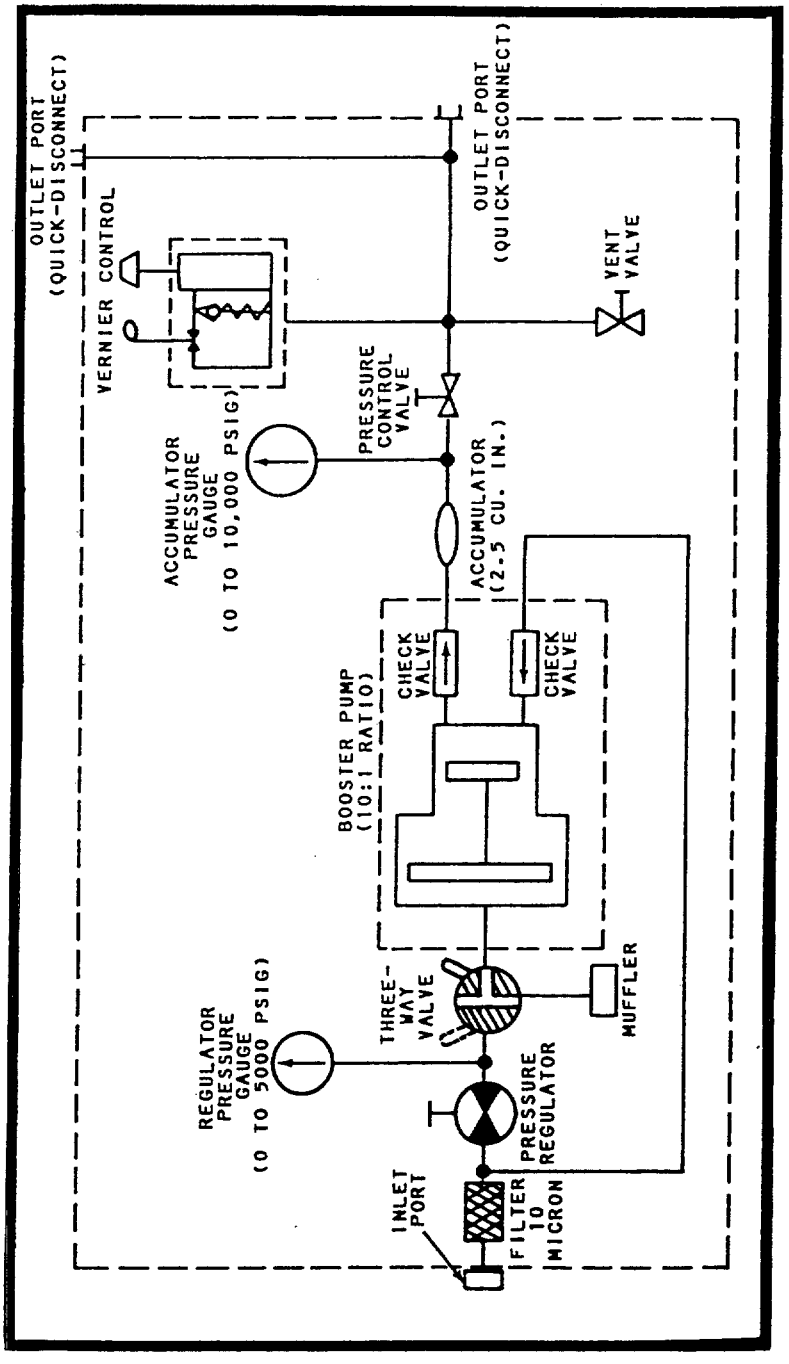


FIGURE 1. Pneumatic amplifier schematic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-47309(MI)	Amplifier, Pneumatic

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil/online/amsc/ 2016-10-22T19:08Z
Check the source to verify that this is the current version before use.