INCH - POUND

MIL-A-47309A (MI)
18 October 1991
SUPERSEDING
MIL-A-47309 (MI)
30 September 1979

MILITARY SPECIFICATION

AMPLIFIER, PNEUMATIC

This specification is approved for use by the U.S. Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification defines requirements for one type of pneumatic amplifier to be used for boosting pneumatic pressure to 10,000 pounds per square inch (psi) and controlling the output pressure from 0 to 10,000 psi.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-P-416	-	Plating, Cadmium (Electrodeposited)

MILITARY

MIL-P-116	-	Preservation, Methods of
MIL-P-7105	-	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT, General Requirements for
MIL-S-7742	-	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-A-8625	-	Anodic Coatings, for Aluminium and Aluminum Alloys
MIL-E-17555	-	Electronic and Electrical Equipment, Accessories, and Provisioned Item (Repair Parts): Packaging of
MIL-T-31000	-	Technical Data Packages

STANDARDS

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of US Military Property
MIL-STD-889	-	Dissimilar Metals
MIL-STD-970	-	Standards and Specifications, Order of Preference for the Selection of
MS33656	-	Fitting End, Standard Dimensions for Flared Tube Connection and Gasket Seal

(Unless otherwise indicated, copies of the federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Ave., Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.2).

3.2 Materials. Materials to be used in the construction of the pneumatic amplifier shall be as specified herein. Material not definitely specified shall be of a good commercial quality suitable for the design requirement and free from all defects. Dissimilar metals as defined by MIL-STD-889 shall not be in contact unless protection against galvanic corrosion is applied.

3.2.1 Nonmetallic material. Nonmetallic materials shall be compatible with the pneumatic media and intended temperature, service, and storage conditions to which the pneumatic amplifier will be exposed.

3.2.2 Nonferrous material. Nonferrous material shall be used in construction of the pneumatic amplifier, except where ferrous material is dictated by design requirements. Magnesium base alloys shall not be used.

3.2.3 Protective coatings. Materials that are subject to deterioration when exposed to environmental conditions shall be protected against deterioration in accordance with the performance requirements of this specification. Metal surfaces of corrosion resistant material on which a protective coating would be detrimental to proper functioning, shall not be coated. Exposed metal surfaces and protected metal surfaces on which a protective coating will not be detrimental shall be treated in accordance with the requirements of this specification.

3.2.3.1 Aluminum alloys. Aluminum alloys shall be treated with anodic coatings in accordance with MIL-A-8625.

3.2.3.2 Ferrous alloys. Ferrous alloys shall be cadmium plated in accordance with QQ-P-416 type II or III, as applicable, and of a class that is adequate to achieve the degree of protection required.

3.2.4 Selection of materials. Specifications and standards for all materials and parts shall be selected in accordance with the order of precedence specified in MIL-STD-970.

3.2.5 Standard parts. Standard parts (MS and AN) shall be used whenever they are suitable for the purpose, and shall be identified on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

drawing by their part number. Commercial utility parts such as screws, bolts, nuts, cotter pins, etc., may be used, provided they possess suitable properties and are replaceable by the standard parts (MS and AN) without alteration, and provided the corresponding standard part numbers are referenced in the parts list and, if practicable, on the contractor's drawings. In the event there is not suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

3.3 Design. The pneumatic amplifier input pressure shall be not greater than 1000 pounds force per square inch (lbf/in^2) input pressure to boost and control an output pneumatic pressure from 0 to 10,000 lbf/in^2. Normal inlet pressure shall be 3000 lbf/in^2. The pneumatic amplifier shall consist of a pressure intensifier, pressure regulator, driving pressure gauge, accumulator, vernier control, pressure control valve, vent control valve, three-way valve, filter, input port, output ports, accumulator pressure gauge and associated plumbing contained in a case in accordance with figure 1.

3.3.1 Pressure intensifier ratio and displacement volume. The area ratio of the pressure intensifier shall be not less than 10 to 1. The displacement volume of the high pressure side shall be not less than 20 cubic centimeters (cc). The displacement volume of the low pressure side shall be not greater than 220 cc (see 4.6.1.1).

3.3.2 Pressure intensifier seals. The pressure intensifier seals shall be of a design and material compatible with the pneumatic media and the design pressures (see 4.6.1.1).

3.3.3 Pressure intensifier cycle time. The pressure intensifier shall make one complete cycle in five seconds or less (see 3.3.8 and 4.6.2).

3.3.4 Accumulator. The pneumatic amplifier shall have an accumulator with a volume of 47.5 $\pm$ 7.5 cc. The accumulator shall be cylindrical with fittings on each end (see 4.6.1.1).

3.3.4.1 Accumulator pressure gauge. The pneumatic amplifier shall have a pressure gauge installed conforming to figure 1. The gauge shall have a 4.5 inch dial with a range of 0 to 10,000 lbf/in^2. Major intervals shall be at 1,000 lbf/in^2 with interim intervals that shall be no greater than 50 lbf/in^2. Gauge accuracy shall be 0.50 percent full scale. The gauge shall have a mirrored dial and adjustable pointer. The case shall have a solid front, blowout back configuration (see 4.6.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

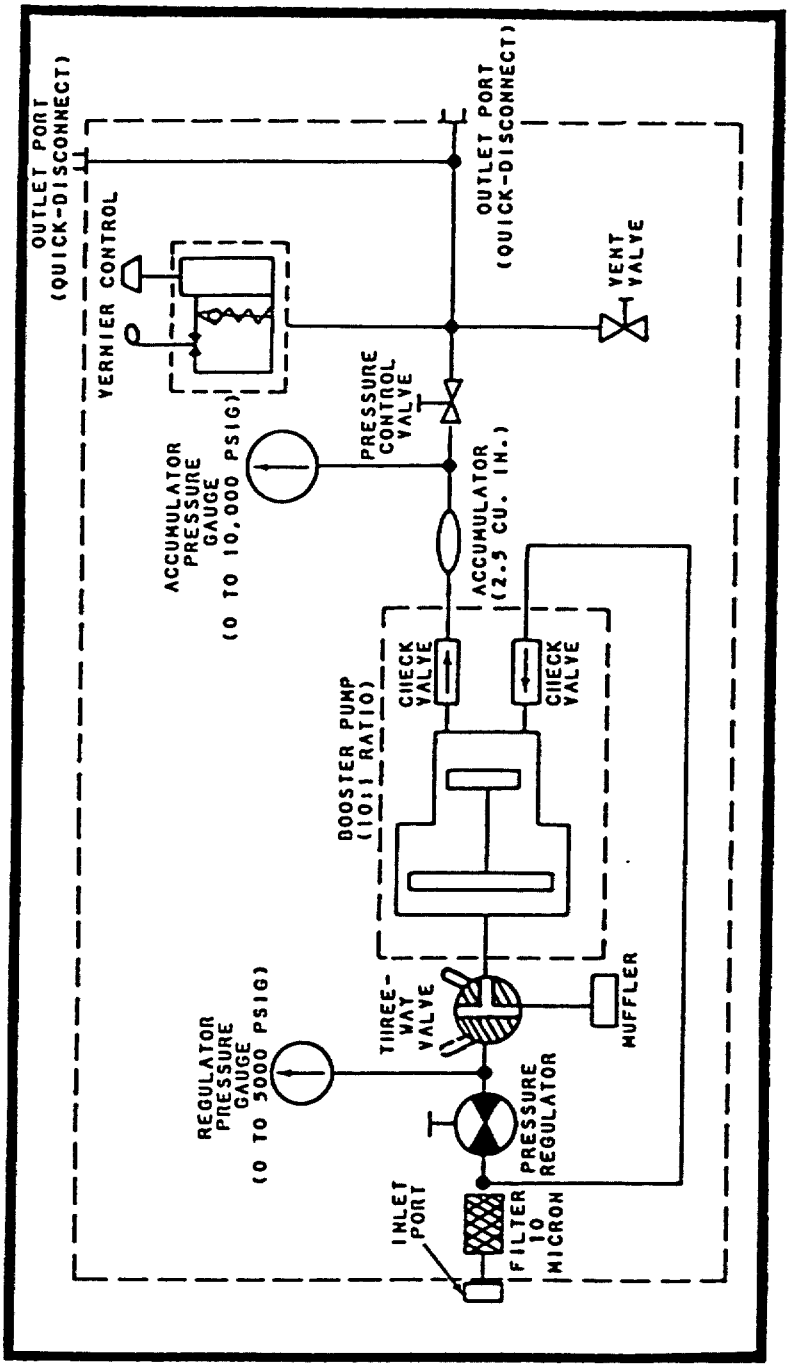


FIGURE 1. Pneumatic amplifier schematic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.3.5 Charge and exhaust valve. A manual three-way valve shall be incorporated conforming to figure 1, to change the pneumatic amplifier from charge to exhaust functions of the operational cycle (see 4.6.1.1).

3.3.6 Pressure and vent control valves. The pressure and vent control valves shall be micro metering valves with replaceable seats. Operating torque shall be not greater than two inch-pounds at 10,000 lbf/in^2 (see 4.6.1.1).

3.3.7 Overpressure protection. The pneumatic amplifier shall be protected from overpressure with a relief valve set not greater than 10,500 lbf/in^2 (see 4.6.1.1).

3.3.8 Pressure regulator. A pressure regulator shall regulate the inlet driving pressure to the pressure intensifier. The regular output pressure and flow range shall be great enough for the intensifier to reach an output pressure of 10,000 lbf/in^2 within the cycle requirements of 3.3.3. Operating torque of the regulator shall be not greater than 30 inch-pounds (see 4.6.2).

3.3.9 Driving pressure gauge. The pneumatic amplifier shall have a regulator pressure gauge installed as shown in figure 1, to indicate the pressure applied to the low pressure end of the intensifier. The gauge shall have a 2.0 inch dial with a range of 0 to 5,000 lbf/in^2. Major intervals shall be at 100 lbf/in^2 with interim intervals at 20 lbf/in^2. Gauge accuracy shall be 3.0 percent full scale (see 4.6.1.1).

3.3.10 Muffler. The exhaust of the charge and exhaust valve shall have a muffler limiting noise levels to 94 decibels at any exhaust rate when measured 1.0 foot from the pneumatic amplifier (see 4.6.1.1).

3.3.11 Filter. The pneumatic amplifier inlet shall be equipped with a 10 micron filter. The filter shall be easily removed for cleaning (see 4.6.1.1).

3.3.12 Check valves. Check valves shall be incorporated in the high pressure head of the intensifier to prevent reverse flow as specified in figure 1.

3.3.13 Inlet fitting. The pneumatic amplifier inlet fitting shall be in accordance with line 4 column 3 of MS33656. The fitting shall be secured to the left end of the amplifier toward the rear of the case and shall be equipped with a captive dust plug.

3.3.14 Outlet fitting. The pneumatic amplifier shall have two quick-disconnect outlet ports equipped with captive dust plugs. The mating halves

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

of the quick-disconnects shall have internal super pressure fittings (0.25 inch nominal) on opposite ends.

3.3.14.1 Outlet fitting location. One outlet port shall be on top of the case approximately two inches from the front edge and seven inches from the end of the second port. The second port shall be on the end opposite the inlet port. The center line of this port shall be 4 ± 0.1 inch from the bottom of the case.

3.3.14.2 Adapters. The pneumatic amplifier shall be equipped with 10 adapters for the outlet ports. One end of each adapter shall have an external super pressure fitting (0.25 inch nominal). The other end shall be as specified in table I.

TABLE I. Adapter end fitting.

Nominal size (inches)	Thread
0.125 - 27	NPT, external
0.125 - 27	NPT, internal
0.25 - 18	NPT, external
0.25 - 18	NPT, internal
0.375 - 18	NPT, external
0.375 - 18	NPT, internal
0.50 - 14	NPT, external
0.50 - 14	NPT, internal
MS33656	external, straight
0.25 (nominal)	superpressure, external

3.3.15 Vernier control. The pneumatic amplifier shall have a vernier control used to make final pressure adjustments with the test circuit isolated. The control shall have internal valving to allow control throughout the range of 0 to 10,000 lbf/in^2. Automatic relief shall be included to prevent the trapping of high pressure gas.

3.4 Construction. The pneumatic amplifier shall be constructed to withstand the strains, jars, vibrations and other conditions incident to shipping, storage, installation and service use.

3.4.1 Screw threads. Machine screw threads shall be in accordance with MIL-S-7742, class 2.

3.4.2 Pipe threads. Pipe threads shall be in accordance with MIL-P-7105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.4.3 Valves, fittings and tubing. Valves, fittings and tubing shall be corrosion resistant steel.

3.4.4 Accumulator. The accumulator shall be corrosion resistant steel.

3.4.5 Pressure intensifier. The intensifier cylinder and low pressure end cap shall be aluminum; the piston and high pressure head shall be corrosion resistant steel.

3.4.6 Case. The case shall be a steel weldment. The case shall be designed to contain rupturing of system components. The upper part of the case shall be removable to access the amplifier system parts for service. The case outside dimensions shall be not greater than eight inches high by 13 inches deep by 24 inches wide including outlet ports (see 4.6.1).

3.4.6.1 Case holddown. The case shall be designed so that it can be permanently installed on a work bench. Suitable attachments shall be supplied.

3.4.7 Weight. The weight of the pneumatic amplifier shall be not greater than 55 pounds (see 4.6.1).

3.4.8 Burst pressure. The high pressure side of the pneumatic amplifier system shall be designed for a burst pressure that shall be not less than 40,000 lbf/in^2; the low pressure side of the system shall be designed for a burst pressure that shall be not less than 10,000 lbf/in^2.

3.4.9 Marking. The pneumatic amplifier shall be marked in accordance with MIL-STD-130 (see 6.2).

3.4.9.1 Front panel marking. Each component shall be labeled as to its function in the system.

3.4.10 Interchangeability. All parts having the same manufacturer's part number shall be interchangeable. Changes in the manufacturer's part number shall conform to MIL-T-31000.

3.5 Performance characteristics. With an inlet pressure of 3,000 lbf/in^2 the pneumatic amplifier shall boost the outlet pressure to 10,000 lbf/in^2 (see 4.6.2).

3.5.1 Leak rate. There shall be no leakage at full operating pressure of 10,000 lbf/in^2. With the outlet ports capped and the pneumatic amplifier stabilized at 10,000 lbf/in^2 for 15 minutes there shall be no pressure decrease for a one hour period after correcting for temperature change (see 4.6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.5.2 Operational environment. The pneumatic amplifier shall operate satisfactorily in the following environment (see 4.3.2):

a. Room temperature, 19° Celsius (C) to 24°C.

b. Pneumatic media temperature, 0°C to 50°C.

c. Relative humidity, 20 percent to 50 percent.

d. Altitude, 0 to 10,000 feet.

3.5.3 Nonoperational environment. The pneumatic amplifier shall operate satisfactorily after being returned to an operational environment from the environment specified herein (see 4.6.4):

a. Stored for 48 hours at -55°C.

b. Stored for 48 hours at 60°C.

c. Stored for 48 hours at an altitude of 40,000 feet.

d. Stored for 48 hours at a relative humidity of 100 percent.

e. Stored for 48 hours at a relative humidity of 0 percent.

3.5.4 Vibration. The unit when packaged for shipment shall be capable of operating satisfactorily after being subjected to vibration with the frequency varying logarithmically between 5 to 500 Hertz (Hz) at the following levels (see 4.6.5):

a. 5 to 27 Hz, 1.3 gravity units (g) $\pm$ 0.05 g.

b. 27 to 52 Hz, 0.036 $\pm$ 0.001 inches double amplitude.

c. 52 to 500 Hz, 5.0 g $\pm$ 0.05 g.

3.5.5 Shock. The pneumatic amplifier when packaged for shipment shall be capable of operating satisfactorily after being subjected to a vertical and lateral shock of 15 g half sine pulse with a duration of 11 milliseconds (see 4.6.6).

3.5.6 Service life. The pneumatic amplifier shall have a minimum maintenance free life of 45,000 cycles varying in pressure from 0 to 10,000 lbf/in^2 at a rate of two cycles per minute. The system shall have an indefinite life except for periodic maintenance (see 4.6.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

3.5.7 Proof pressure. The pneumatic amplifier shall operate satisfactorily after being subjected to a proof pressure of 4,000 lbf/in^2 on the low pressure system and a proof pressure of 15,000 lbf/in^2 on the high pressure system (see 4.6.8).

3.6 Workmanship. The pneumatic amplifier, including all parts and accessories, shall be fabricated and finished in accordance with high grade commercial practice. There shall be no defects, burrs, cracks, sharp edges or blemishes (see 4.6.1 and 4.6.9).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the conditions of 4.3.1 and 4.4 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

4.3.1 Cleaning. Prior to inspection the pneumatic amplifier shall be thoroughly degreased, cleaned and kept free of oil or other flammable compounds. The pneumatic amplifier shall be maintained in this condition (see 4.3.1).

4.4 First article inspection. Unless otherwise specified in the contract or order (see 6.3), a first article sample shall be subjected to first article inspection. The first article sample shall consist of one pneumatic amplifier representative of the production product which has been produced by the contractor or furnished by a supplier and which has been manufactured using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as will be used in regular production. The first article sample shall be subjected to inspections and tests specified in table II in the order specified. Subsequent units shall not be considered for acceptance until Government approval of the first article sample has been obtained.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Examination of product	3.4.6, 3.4.7 & 3.6	4.6.1
Performance characteristics	3.5	4.6.2
Leak rate	3.5.1	4.6.3
Nonoperational environment	3.5.3	4.6.4
Vibration	3.5.4	4.6.5
Shock	3.5.5	4.6.6
Service life	3.5.6	4.6.7
Proof pressure	3.5.7	4.6.8

4.5 Quality conformance inspection. Each pneumatic amplifier shall be subjected to the inspections and tests specified in table III, in the order shown, to demonstrate quality conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

TABLE III. Quality conformance inspection.

Inspection	Requirement paragraph	Test paragraph
Examination of product	3.4.6, 3.4.7 & 3.6	4.6.1
Performance characteristics	3.5	4.6.2
Leak rate	3.5.1	4.6.3
Proof pressure	3.5.7	4.6.8
Workmanship	3.6	4.6.9

4.6 Methods of inspection.

4.6.1 Examination of product. Each pneumatic amplifier shall be visually and dimensionally inspected and weighed as specified in 3.4.6, 3.4.7 and 3.6.

4.6.1.1 Verification of requirements. A certificate, as specified in the contract or order (see 6.2), shall be submitted verifying the requirements of 3.3.1, 3.3.2, 3.3.4, 3.3.4.1, 3.3.5, 3.3.6, 3.3.7, 3.3.8, 3.3.9, 3.3.10 and 3.3.11 are as specified herein.

4.6.2 Performance characteristics. With 3,000 lbf/in^2 applied to the inlet port and the outlet ports capped, the pneumatic amplifier shall be operated over a range of outlet pressures from 0 to 10,000 lbf/in^2 to determine compliance with 3.3.8 and 3.5 (see 4.6.4 through 4.6.8).

4.6.3 Leak rate. With 3,000 lbf/in^2 applied to the inlet port and the outlet ports capped, the pneumatic amplifier shall be operated to determine compliance with 3.5.1 (see 4.6.3 through 4.6.8).

4.6.4 Nonoperational environment. The pneumatic amplifier shall be subjected to each of the environmental conditions of 3.5.3. At the end of each period the pneumatic amplifier shall be stabilized at the conditions of 3.5.2 and functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.5 Vibration. The pneumatic amplifier shall be subjected to the vibration levels of 3.5.4. At the end of the vibration environment the pneumatic amplifier shall be functionally tested in accordance with 4.6.2 and 4.6.3.

4.6.6 Shock. The pneumatic amplifier shall be subjected to the requirements in 3.5.5. At the end of the shock testing the pneumatic amplifier shall be in accordance with 4.6.2 and 4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

4.6.7 Service life. The pneumatic amplifier shall be cycled to the requirements of 3.5.6. At the end of 45,000 cycles the pneumatic amplifier shall be in accordance with 4.6.2 and 4.6.3.

4.6.8 Proof pressure. The pneumatic amplifier shall be subjected to the proof pressure requirements of 3.5.7 and shall be in accordance with 4.6.2 and 4.6.3.

4.6.9 Workmanship. The pneumatic amplifier shall be fabricated from the highest quality materials required to meet the tests as specified herein.

4.7 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification shown in section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

5. PREPARATION FOR DELIVERY

5.1 Preservation, Packaging and Packing. Preservation, packaging and packing for Levels A, B and C shall be in accordance with MIL-E-17555.

5.2 Marking. Marking shall be in accordance with MIL-STD-129 (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pneumatic amplifier is intended for use with a pneumatic media of water pumped nitrogen in a laboratory environment.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1)

c. Whether first article sample is required (see 3.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

d. Level of identification and marking required (see 3.4.9 and 5.2)

e. Whether contractor certification of requirements is required (see 4.6.1.1)

f. Applicable level of preservation, packaging and packing required (Section 5)

g. Details for inspection of commercial packaging, as specified (see 4.7)

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerers whether the item(s) should be a first article sample, a first production item, or a number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Safety shield assembly. Operation of the pneumatic amplifier requires the use of a safety shield assembly. New or replacement safety shield assemblies can be procured separately in accordance with Army Drawing Number 7916967 (FSCM 18876).

6.5 Metrication. Metric equivalents in accordance with FED-STD-376 are acceptable for use in this specification.

6.6 Subject term (keyword) listing.

Booster, pressure
Fluidic, booster
Pressure intensifier

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4931-A307)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-A-47309A(MI)	

3. DOCUMENT TITLE
AMPLIFIER PNEUMATIC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
COMMANDER U.S. ARMY MISSILE COMMAND	(1) Commercial (205)876-6980	(2) AUTOVON 746-6980
c. ADDRESS (Include Zip Code) ATTN: AMSMI-RD-SE-TD-ST REDSTONE ARSENAL, AL 35898-5270	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:08Z
Check the source to verify that this is the current version before use.