MIL-STD-35-51(MI)
NOTICE 1
25 October 1974

MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

SPROCKETS

TO ALL HOLDERS OF MIL-STD-35-51(MI)

1. The following pages of MIL-STD-35-51(MI) have been revised and supersede the pages listed.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
v	25 October 1974	v	5 June 1974
vi	25 October 1974	vi through viii	5 June 1974
5	25 October 1974	5	5 June 1974
6	25 October 1974	6	5 June 1974
7	25 October 1974	7	5 June 1974
8	25 October 1974	8	5 June 1974
9	25 October 1974	9 through 20	5 June 1974
21	25 October 1974	21	5 June 1974
22	25 October 1974	22	5 June 1974
27	25 October 1974	27	5 June 1974
28	25 October 1974	28 through 34	5 June 1974
35	25 October 1974	35	5 June 1974
36	25 October 1974	36	5 June 1974
45	25 October 1974	45 through 56	5 June 1974
57	25 October 1974	57 and 58	5 June 1974
61	25 October 1974	61 through 78	5 June 1974
95	25 October 1974	95 through 99	5 June 1974

2. Retain this page and insert before the Table of Contents.

3. Holders of MIL-STD-35-51(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or cancelled.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

User Activity:
Army-MU

Preparing Activity
Army-MI
Project EDS-A088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1.0	Sprockets	1
1.1	Specification Title Index	3
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.2	Approved Item Name Code	6
1.2.3	Figure Number	6
1.2.4	Dimensions	6
1.2.5	Tabulation	6
1.2.6	Deleted	
1.2.7	Deleted	
1.2.8	Deleted	
1.2.9	Applicable Documents	
	NOTE : Paragraphs 1.2.10 through 1.2.21 have been deleted.	
1.2.22	Design and Construction	9
1.2.23	Sprocket Data From MIL-S-52403	21
1.2.24	Eccentricity (Pitch Line)	22
1.2.25	Oscillation (Wobble) (Sideface)	22
1.2.26	Weight	23
1.2.27	Mechanical and Physical Properties	23
1.2.28	Torque	25
1.2.29	Fungus	25

Supersedes page v of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	PAGE
1.2.30	Salt Fog	26
1.2.31	Humidity	27
1.2.32	Visual and Mechanical Examination	28
	Specification Requirements	35-56
	Tables	59-60
1.3	Configuration and Drawings	79
1.3.1	Figure Titles vs Figure Numbers	81
1.3.2	Legend Index	83-86
	Figures 115-01-1 thru 115-05-1	87-94

Supersedes pages vi through viii of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of these instructions is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

The requester will find it impossible to complete an SRS using only this dash numbered part of MIL-STD-35. Information which is standard for all generic families has been included in the master document at the issuance of MIL-STD-35C. This information is not repeated for each dash numbered part. The following list contains the subjects which are pertinent to every family unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-Item Specification (Tabulation)
Sources
Search
General Instructions for SRL
Tables A through S

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

1.2.2 Approved Item Name Code

The item name code for a sprocket, to be entered on the SRS with Code 1007 is selected from the Item Name Code column of the following list.

Approved Item Name	Item Name Code
Sprocket Wheel	04456
Unapproved Names	77777

1.2.3 Figure Number

Code 1009 must show the figure number selected from Section 1.3. Where it may be necessary to show more than one figure to describe an item, the figure numbers must be in correct sequence and as in the following example: “1009115-01-1, 115-03-1, and 115-04-1#".

1.2.4 Dimensions

MIL-STD-35 must be used in conjunction with this dash numbered part to completely delineate the dimensions for a sprocket.

The figures and corresponding legends, representing different configurations of sprockets, are located at the end of this document. The figure number (representing the selected figure) is mandatory and shall be entered on the SRS with Code 1009. The figure legends in this document (AA, AB, AC, etc.) representing dimensions shall be employed with corresponding legends in Table A of MIL-STD-35.

The remaining instructions for dimensioning of sprockets are located in MIL-STD-35.

1.2.5 Tabulation

The explanation of, and the instructions for using tabulation are found in MIL-STD-35. Dimensional code candidates for this part are found in Table A of MIL-STD-35. Other candidates are listed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABULATION CANDIDATES FOR SPROCKETS

Characteristic Code	Title
1611	Bore Style Number
1631	Number of Sprocket Teeth
1643	Bushing Type
1647	Number of Strands
1648	Chain Number
	Weight (Maximum)
1666	Pounds
1667	Ounces
1668	Grams
1627	Sprocket Type
1629	Sprocket Grade
1601	Body Style Number
1606	Hub Style Number
1616	Tooth Style Number
1621	Width Style Number
1633	Setscrew Type
1639	Keyway Type
1650	Number of Spokes
1651	Number of Lightening Holes
1652	Number of Rim Segments

NOTE: Paragraphs 1.2.6, 1.2.7, and 1.2.8 have been deleted

Supersedes page 7 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

1.2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any Characteristic Code must also be listed with a code from Table B of MIL-STD-35.

In addition to the above, entry of the following documents may be necessary using appropriate codes from Table B of MIL-STD-35.

a. When Code 1649 (Chain Number) is used, one of the following documents is to be referenced.

MIL-STD-421	Chain Roller: Power Transmission Conveyor, Flat Link Plates, Single Pitch, Single and Multiple Strand: Connecting Links and Attachment Links
MIL-STD-423	Chain Roller: Conveyor, Standard and Large Rollers, Flat Link Plates, Double Pitch, Single Strand, Connecting Links and Attachment Links
MIL-STD-424	Chain Roller: Power Transmission, Offset Sidebars, Single Pitch
MIL-STD-425	Chain, Silent: 60-Degree Inverted Tooth, Power Transmission
MIL-STD-627	Sprocket Wheels for Power Transmission and Conveying Chains

b. When Code 1687 (Torque) is used, the following specification is referenced:

MIL-S-52403	Sprocket Wheels for Power Transmission and Conveying Chains

c. When Code 4755 (Fungus), Code 4771 (Salt Fog) and/or Code 4790 (Humidity) is used, the following standard is referenced:

MIL-STD-810	Environmental Test Methods

d. NBS-HDBK-H28 when screw threads are specified (Screw Thread Standard for Federal Services).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

e. If any of the codes in 1.2.23 (Sprocket Data) are used, the following document is to be referenced:

MIL-S-52403	Sprocket Wheels for Power Transmission and Conveying Chains

f. If Code 1635 (Setscrews Size) is used, one of the following documents must be referenced:

ANSI B18.3	Socket Cap, Shoulder and Set Screws
ANSI B18.6.2	Slotted Head Cap Screws, Square Head Set Screws, and Slotted Headless Set Screws

g. If Code 1641 (Keyways Size) is used, one of the following documents is to be referenced:

ANSI B17.1	Keys and Keyseats
ANSI B17.2	Woodruff Keys and Keyseats

h. If Code 1644 (Bushing Number Designation) is used, the following document is to be referenced:

MIL-STD-627	Sprocket Wheels for Power Transmission and Conveying Chains

NOTE: Paragraphs 1.2.10 through 1.2.21 have been deleted.

1.2.22 Design and Construction

To specify the sprocket body style, enter Code 1600 on the SRS followed by the dash number of the figure (115-01-_____) on which the desired body style is shown. If Code 1600 is used, it is mandatory to enter Code 1601 on the SRS followed by the body style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.3.).

Supersedes pages 9 through 20 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

To specify the sprocket hub style, enter Code 1605 on the SRS followed by the dash number of the figure (115-02-_____) on which the desired hub style is shown. If Code 1605 is used, it is mandatory to enter Code 1606 on the SRS followed by the hub style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.3).

To specify the sprocket bore style, enter Code 1610 on the SRS followed by the dash number of the figure (l15-03-____) on which the desired bore style is shown. If Code 1610 is used, it is mandatory to enter Code 1611 on the SRS followed by the bore style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.3).

To specify the sprocket tooth style, enter Code 1615 on the SRS followed by the dash number of the figure (115-04-____) on which the desired tooth style is shown. If Code 1615 is used, it is mandatory to enter Code 1616 on the SRS followed by the tooth style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.3).

To specify the sprocket multiple width style, enter Code 1620 on the SRS followed by the dash number of the figure (115-05-____) on which the desired multiple width style is shown. If Code 1620 is used, it is mandatory to enter Code 1621 on the SRS followed by the multiple width style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.3).

1.2.23 Sprocket Data From MIL-S-52403

Sprocket data such as type, grade, number of sprocket teeth, etc., may be specified in accordance with MIL-S-52403 as discussed below. If any of these data are specified, enter MIL-S-52403 on the SRS with an appropriate code from Table B of MIL-STD-35.

To specify the sprocket type, enter Code 1627 on the SRS followed by the desired type.

To specify the sprocket grade, enter Code 1629 on the SRS followed by the desired grade.

To specify the number of teeth for a single or multiwidth non-stepped sprocket, enter Code 1631 on the SRS followed by the desired number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

To specify the number of teeth in a stepped sprocket, enter Codes 1700, 1701, 1702, 1703 and/or 1704 followed by the desired number for, respectively, the first, second, third, fourth and/or fifth wheel in the stepped sprocket.

To specify the setscrew type, setscrew size and/or number of setscrews, enter Code 1633, 1635 and/or 1637, respectively, on the SRS followed by the appropriate data.

To specify the keyway type, keyway size and/or number of keyways, enter Code 1639, 1641 and/or 1642, respectively, on the SRS followed by the appropriate data.

To specify the bushing type and/or the bushing number designation, enter Code 1643 and/or 1644, respectively on the SRS followed by the appropriate data.

To specify the number of strands (multiple width sprockets), enter Code 1647 on the SRS followed by the number.

To specify the chain number, enter Code 1648 on the SRS followed by the number. If the chain number is specified, it is mandatory to reference the specification which contains the chain number by entering Code 1649 on the SRS followed by the number of the specification. If a specification is referenced, also enter the specification number on the SRS with an appropriate code from Table B of MIL-STD-35.

To specify the number of spokes, enter Code 1650 on the SRS followed by the number.

To specify the number of lightening holes, enter Code 1651 on the SRS followed by the number.

To specify the number of rim segments, enter Code 1652 on the SRS followed by the number.

1.2.24 Eccentricity (Pitch Line)

To specify the eccentricity (pitch line) deviation, enter Code 1660 on the SRS followed by the total allowable indicator reading in inches.

1.2.25 Oscillation (Wobble) (Sideface)

To specify the oscillation (wobble) (sideface) deviation, enter Code 1665 on the SRS followed by the total allowable indicator reading in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

To specify that the sprocket shall show no evidence of corrosion, enter Code 4786 on the SRS followed by an “X”,

1.2.31 Humidity

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4787 on the SRS followed by an “X”.

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4788 on the SRS and complete the sentence shown with Code 4788 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be in accordance with Method 507 of MIL-STD-81O, it is mandatory to enter Code 4790 on the SRS followed by the test procedure number. If Code 4790 is used, enter MIL-STD-810 on the SRS with an appropriate code from Table B of MIL-STD-35. To specify the time interval at which readings shall be taken, enter Code 4791 on the SRS followed by the value in hours. To specify that the conductivity method shall be used for determining water purity, enter Code 4792 on the SRS followed by an “X”. (Specify only if pH criteria is not applicable,) To specify that the test specimen shall be exposed to extreme temperature prior to testing, enter Code 4793 on the SRS followed by an “X”. (Use Code 4793 only if Test Procedure I is specified by using Code 4790.) To specify the number of test cycles (if other than standard), enter Code 4794 on the SRS followed by the number.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4795 on the SRS followed by an “X”.


If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4796 on the SRS and complete the sentence shown with Code 4796 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that there shall be no evidence of corrosion, enter Code 4797 on the SRS followed by an “X”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

1.2.32 Visual and Mechanical Examination

If it is desired to specify visual and mechanical examination in accordance with Table IV, the Visual and Mechanical Examination Table, enter the appropriate code(s) from the desired lines of Table IV on the SRS followed by an "X". An example of the use of codes from Table IV is as follows:

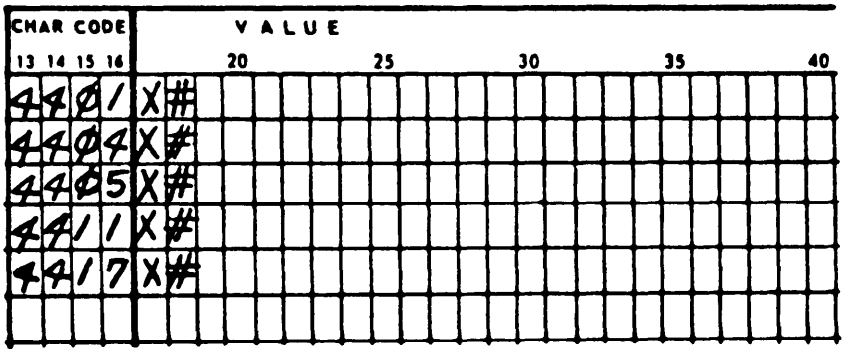

The line(s) selected by entering code(s) from Table IV on the SRS will be printed in the specification. For example, if Code 4401 is used the printout in the specification will be as follows:

Parameter	External Examination	Internal Examination
Dimensions	X	X

NOTE : Paragraphs 1.2.33 through 1.2.41 have been deleted.

Custodians:
Army-MI

User Activity:
Army-MU

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

Preparing Activity:
Army-MI
Project EDS-A088

Supersedes pages 28 through 34 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.2.1	Enter on SRS, Requirements from MIL-STD-35.	
	NOTE: Reference Paragraphs 1.2.12 through 1.2.21 have been deleted. These characteristic names and codes are now contained in MIL-STD-35.	
1.2.22	Design and Construction	
	Sprocket Body Style	
	The body shall conform to Figure Number 115-Ø1-_____.	1600
	*Style Number _____.	1601
	Sprocket Hub Style	
	The hub shall conform to Figure Number 115-Ø2-_____.	1605
	*Style number _____.	1606
	Sprocket Bore Style	
	The bore shall conform to Figure Number 115-Ø3-_____.	1610
	*Style number _____.	1611
	Sprocket Tooth Style	
	The tooth shall conform to Figure Number 115-Ø4-_____.	1615
	*Style number _____.	1616

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION Requirements LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
1.2.22 Cont	Sprocket Multiple Width Style	
	The sprocket shall conform to Figure Number 115-Ø5-_____.	1620
	*Style number _____.	1621

Supersedes page 36 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.2.31 Cont	Requirement (Select one if required) (Mandatory if either Code 4787, 4788 or 4790 is selected)	
	Requirements per specification shown with Code 1006	4795
	or	
	Requirements per specification shown with Code 1006 except _____.	4796
	or	
	Requirements as follows:	
	There shall be no evidence of corrosion.	4797
1.2.32	Visual and Mechanical Examination (Select as required)	
	(Use codes from Table IV)	

Supersedes pages 45 through 56 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

NOTE: Tables I and II have been deleted.

Supersedes pages 57 and 58 of 5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Supersedes pages 61 through 78 of5 June 1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Supersedes pages 95 through 99 of 5 June 1974

*U.S. GOVERNMENT PRINTING OFFICE: 1976—703-020/1255

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.