
FED. SUP CLASS
5310

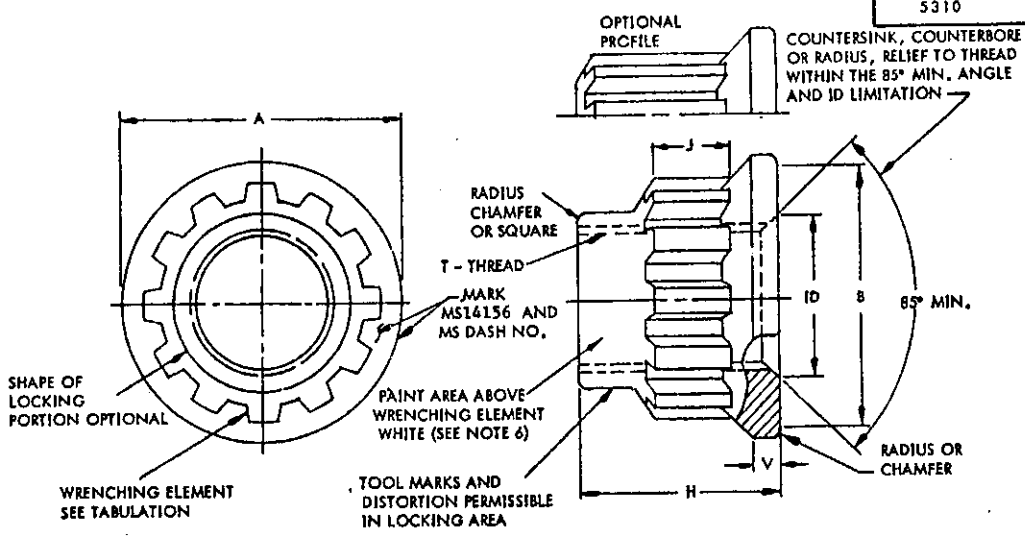

NOTES:

1. MATERIAL: ALLOY STEEL, AMS 6304, AMS 6485, AMS 6487.
2. HARDNESS: ROCKWELL C 40 MAX.
3. SURFACE TEXTURE: BEARING SURFACE 125 IN ACCORDANCE WITH ANSI B46.1.
4. PLATING: CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2.
5. LUBRICANT: LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN THE PROCUREMENT SPECIFICATION.
6. PAINT: AFTER BAKE, THE AREA ABOVE WRENCHING ELEMENT WITH NO. 17875 WHITE PER TT-E-489.
7. THREADS: MIL-S-8879 BEFORE LUBRICATION.
8. WRENCHING ELEMENT: PER MS33787. DRIVERS PER MIL-W-8982.
9. DIMENSIONS IN INCHES: DIMENSIONS APPLY BEFORE LUBRICATION.
10. DESIGN USAGE INFORMATION: THESE NUTS ARE DESIGNED TO BE USED WITH MS14157 BOLTS AND MS14155 WASHERS.
11. PERPENDICULARITY: BEARING SURFACE SHALL BE NORMAL WITH PITCH DIAMETER OF THREAD WITHIN "X" (SEE TABLE) WHEN CHECKED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
12. PERFORMANCE: PER MIL-N-8985 EXCEPT FOR:
    a. THREADS AND BEARING SURFACES SHALL BE LUBRICATED WITH MIL-T-5544 COMPOUND FOR WRENCH TORQUE, TORQUE EFFECTIVITY, LOCKING TORQUE, PERMANENT SET, ACCELERATED VIBRATION, STRESS DURABILITY AND STRESS CORROSION.
    b. TABULATED SEATING TORQUE FOR TORQUE EFFECTIVITY TEST.
    c. MINIMUM BREAKAWAY 1st CYCLE TORQUE VALUES ARE NOT APPLICABLE.USE MINIMUM BREAKAWAY TORQUE VALUES.
    d. FOR WRENCHING TORQUE BOLTS SHALL BE 220,000 P.S.I. MINIMUM.
13. EXCHANGEABILITY RELATIONSHIP: FOR AIRCRAFT WHEELS ONLY MS14156 NUTS CAN UNIVERSALLY REPLACE THE GYN 184THROUGH GYN 1816NUTS OF LIKE PLATING AND THREAD SIZE. BUT THE GYN 184THROUGH GYN 1816NUTS CANNOT UNIVERSALLY REPLACE THE MS 14156 NUTS.

EXAMPLE OF PART NUMBERS:
MS14156 -04 = .2500-28 NUT, CADMIUM PLATED, SOLUBLE LUBRICANT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 13 SEP 74 REVISED

REVIEWER SYMBOLS: ARMY - AV, EL, AT, ME, MC
USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE: NUT, WHEEL, SELF-LOCKING, FLANGED, STEEL, 180 KSI Fty, 450°F. SPLINE DRIVE	MILITARY STANDARD MS14156
PROCUREMENT SPECIFICATION MIL-N-8985	SUPERSEDES	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:35Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

DASH NO.	NOMINAL SIZE	T THREAD	MS 33787 ELEMENT NUMBER	A	B	ID	
				MAX	MIN	MAX	MIN
04	1/4	.2500-28UNJF-3B	10	.444	.414	.280	.250
05	5/16	.3125-24UNJF-3B	12	.517	.517	.342	.312
06	3/8	.3750-24UNJF-3B	14	.654	.614	.405	.375
07	7/16	.4375-20UNJF-3B	18	.753	.713	.473	.438
08	1/2	.5000-20UNJF-3B	20	.863	.823	.535	.500
09	9/16	.5625-18UNJF-3B	22	.938	.898	.597	.562
10	5/8	.6250-18UNJF-3B	24	1.050	1.010	.660	.625
12	3/4	.7500-16UNJF-3B	30	1.230	1.190	.785	.750
14	7/8	.8750-14UNJF-3B	34	1.438	1.398	.910	.875
16	1	1.0000-12UNJF-3B	38	1.625	1.575	1.035	1.000

DASH NO.	H MAX	V MIN	J MIN	X MIN	ULTIMATE AXIAL STRENGTH LB MIN (a)	SEATING TORQUE FOR TORQUE EFFECTIVITY TEST IN-LB	APPROX WEIGHT LB/100
04	.290	.033	.110	.003	7,270	110	.57
05	.363	.038	.138	.004	11,500	210	.96
06	.438	.045	.165	.004	17,100	380	1.63
07	.506	.053	.193	.005	23,200	600	2.42
08	.549	.060	.220	.005	30,900	910	3.28
09	.600	.068	.248	.005	39,200	1300	4.13
10	.650	.075	.275	.006	49,100	1800	6.26
12	.750	.090	.330	.007	71,000	3200	9.35
14	.875	.105	.385	.008	97,100	5000	14.00
16	1.000	.120	.440	.009	126,000	7500	19.52

(a) AXIAL STRENGTH DETERMINED FROM FORMULA Wa = FtuA WHERE A IS THE CROSS SECTIONAL AREA, IN SQUARE INCHES, BASED ON THE MAXIMUM PITCH DIAMETER OF BOLT THREAD, Ftu IS 180 KSI AND Wa IS THE AXIAL STRENGTH IN POUNDS.

REVIEWER SYMBOLS: ARMY - AV, EL, AT, ME, MC
USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document

APPROVED 13 SEP 74 REVISED

P.A.
NAVY - AS
Other Cust
USAF - 11
ARMY - AV

TITLE
NUT, WHEEL, SELF-LOCKING, FLANGED, STEEL, 180 KSI Ftu, 450°F. SPLINE DRIVE

MILITARY STANDARD
MS14156

PROCUREMENT SPECIFICATION
MIL-N-8985

SUPERSEDES

SHEET 2 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 73065

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:35Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

REVIEWER SYMBOLS: ARMY - AV, EL, AT, ME, MC
USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

EXCHANGEABILITY TABLE

SELECT NUTS FROM THE FOLLOWING EXCHANGEABILITY TABE OF THIS STANDARD AS SUBSTITUTI VE PARTS FOR GYN 184THROUGH GYN 1816	
INACTIVATED PART NUMBERS FOR WHEEL NUTS ONLY	SUBSTITUTIVE PART NUMBERS
(a) GYN 184	MS14156-04
GYN 185	MS14156-05
GYN 186	MS14156-06
GYN 187	MS14156-07
GYN 188	MS14156-08
GYN 189	MS14156-09
GYN 1810	MS14156-10
GYN 1812	MS14156-12
GYN 1814	MS14156-14
GYN 1816	MS14156-16

(a) GOODYEAR TIRE AND RUBBER CO., DESIGNATION.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing use shall be made from this document.

APPROVED 13 SEP 74 REVISED

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE NUT, WHEEL, SELF-LOCKING, FLANGED, STEEL, 180 KSI Ftu, 450°F. SPLINE DRIVE	MILITARY STANDARD MS14156 SHEET 2 OF 3
PROCUREMENT SPECIFICATION MIL-N-8985	SUPERSEDES:	

DD FORM 1 MAR 72 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, *government activities, or manufacturers/vendors* who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MS14156 NUT, WHEEL, SELF-LOCKING, FLANGED, STEEL, 180 KSI Ftu, 450°F. SPLINE DRIVE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316



Engineering Specifications and Standards Department (Code ES)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:35Z
Check the source to verify that this is the current version before use.