INCH-POUND


MS20756F
w/AMENDMENT 2
6 March 2014
SUPERSEDING
MS27056F
w/AMENDMENT 1
12 June 2012

DETAIL SPECIFICATION SHEET

FLANGE, SWIVEL, RETAINING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and SAE-AS4875.

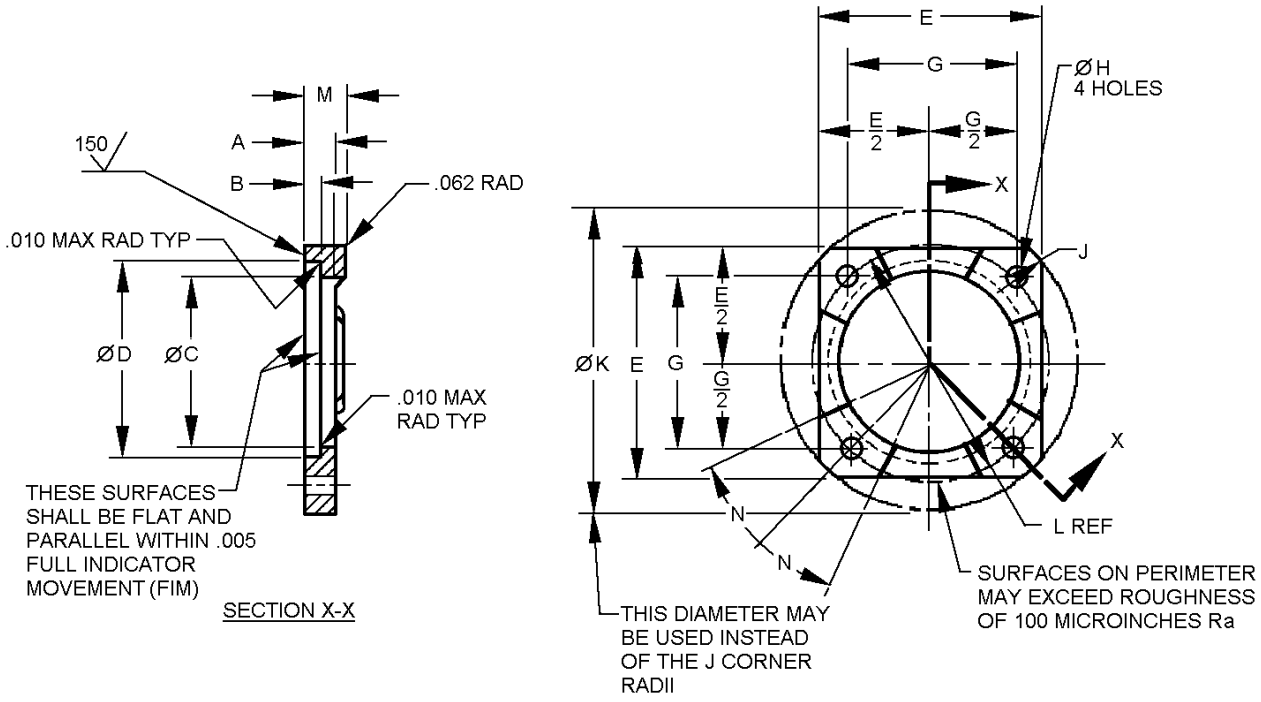

Inches	mm
.005	0.13
.010	0.25
.062	1.57

FIGURE 1. Swivel fitting flange type I rectangle size 8 through 32.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

Size designator	Tubing OD and hose ID inches (mm)	A +.015 -.005 (+0.38 -0.13) inches (mm)	B +.005/-.000 (+0.13/-0.00) inches (mm)	C dia (see note 4) +.010/-.000 (+0.25/-0.00) inches (mm)	D dia (see note 4) +.005 (+0.13/-0.00) inches (mm)	E (see note 9) inches (mm)	
8	.500 (12.70)	.234 (5.94)	.136 (3.45)	.750 (19.05)	.885 (22.48)	1.390 (35.31)	±.016 (0.41)
10	.625 (15.88)			.880 (22.35)	1.010 (25.65)	1.468 (37.29)	
12	.750 (19.05)			1.125 (28.58)	1.260 (32.00)	1.594 (40.49)	
16	1.000 (25.40)			1.375 (34.93)	1.510 (38.35)	1.750 (44.45)	
20	1.250 (31.75)			1.688 (42.88)	1.854 (47.09)	2.188 (55.58)	±.020 (0.51)
24	1.500 (38.10)	.297 (7.54)	.168 (4.27)	1.938 (49.23)	2.135 (54.23)	2.375 (60.33)	
32	2.000 (50.80)			2.562 (65.07)	2.760 (70.10)	3.000 (76.20)	

Size number	G ±.005 (±0.13) inches (mm)	H dia +.010/-.000 (+0.25 -0.00) inches (mm)	J radius (see note 9) ±.016 (±0.41) inches (mm)	K dia (see note 9) ±.015 (±0.38) inches (mm)	L dia inches (mm)	M ±.016 (±0.41) inches (mm)	N
8	.950 (24.13)	.205 (5.21)	.219 (5.56)	1.782 (45.26)	1.344 (34.14)	.296 (7.52)	20°
10	1.038 (26.37)			1.906 (48.41)	1.468 (37.29)		
12	1.156 (29.36)			2.094 (53.19)	1.635 (41.53)		
16	1.312 (33.32)			2.312 (58.72)	1.855 (47.12)		18°
20	1.656 (42.06)	.266 (6.76)	.266 (6.76)	2.875 (73.03)	2.342 (59.49)		16°
24	1.812 (46.02)		.281 (7.14)	3.094 (78.59)	2.562 (65.07)	.359 (9.12)	
32	2.375 (60.33)	.328 (8.33)	.312 (7.92)	3.953 (100.41)	3.359 (85.32)		12°

FIGURE 1. Swivel fitting flange type I rectangle size 8 through 32 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

Size number	Weight max (estimated) lbs (gram)		
	Steel	Al alloy	Titanium
8	.03 (14)	.01 (5)	.02 (9)
10	.05 (23)	.02 (9)	.03 (14)
12	.08 (36)	.03 (14)	.04 (18)
16			
20	.14 (64)	.05 (23)	.07 (32)
24	.17 (77)	.06 (27)	.09 (41)
32	.25 (113)	.09 (41)	.13 (59)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances linear dimensions ±.005 inch (0.13 mm) angles ±.5°.
4. Diameters C and D shall be concentric within .010 inch (0.25 mm) full indicator movement.
5. Unless otherwise specified, the surface roughness shall not exceed 100 microinches (25.4 µm) Ra in accordance with ASME B46.1.
6. Break all sharp edges; remove all loose or hanging burrs and slivers that may become dislodged.
7. For tube sizes -8 through -16, maximum operating temperature 275°F (135°C), maximum pressure 1500 psi (10 MPa).
8. For tube sizes -20 though -32, maximum operating temperature 275°F (135°C), maximum pressure 500 psi (3.4 MPa).
9. Reduction by forging draft angle of 7° maximum is permissible if forged.

FIGURE 1. Swivel fitting flange type I rectangle size 8 through 32 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

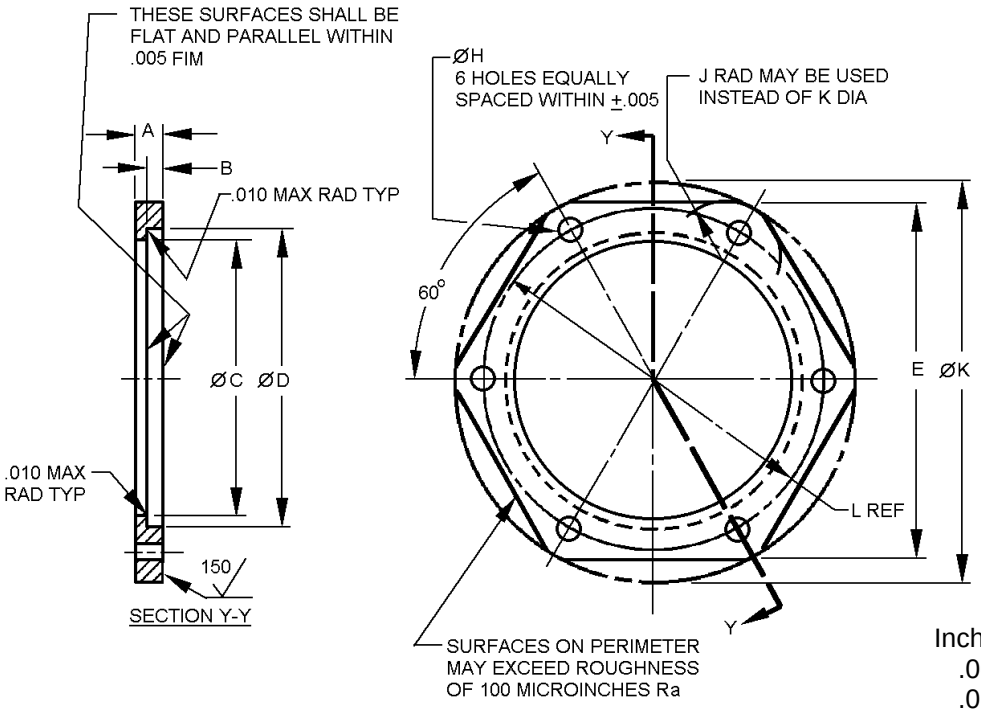

Size designator	Tubing OD and hose ID inches (mm)	A +.015 -.005 (+0.38 -0.13) inches (mm)	B +.005/-.000 (+0.13/-0.00) inches (mm)	C dia (see note 4) +.010/-.000 (+0.25/-0.00) inches (mm)	D dia (see note 4) +.005 (+0.13/-0.00) inches (mm)	E (see note 9) inches (mm)	
8	.500 (12.70)	.234 (5.94)	.136 (3.45)	.750 (19.05)	.885 (22.48)	1.538 (39.07)	±.016 (0.41)
10	.625 (15.88)			.880 (22.35)	1.010 (25.65)	1.644 (41.76)	
12	.750 (19.05)			1.125 (28.58)	1.260 (32.00)	1.813 (46.05)	
16	1.000 (25.40)			1.375 (34.93)	1.510 (38.35)	2.000 (50.80)	
20	1.250 (31.75)			1.688 (42.88)	1.854 (47.09)	2.460 (62.48)	±.020 (0.51)
24	1.500 (38.10)	.297 (7.54)	.168 (4.27)	1.938 (49.23)	2.135 (54.23)	2.680 (68.07)	
32	2.000 (50.80)			2.562 (65.07)	2.760 (70.10)	3.359 (85.32)	
40	2.500 (63.50)			3.062 (77.77)	3.291 (83.59)	4.000 (101.60)	
48	3.000 (76.20)			3.562 (90.47)	3.791 (96.29)	4.500 (114.30)	

FIGURE 2. Swivel fitting flange type II hexagon size 8 through 48.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.


Size number	H dia +.010/-.000 (+0.25/-0.00) inches (mm)	J radius (see note 9) ±.016 (±0.41) inches (mm)	K dia (see note 9) ±.015 (±0.38) inches (mm)	L dia inches (mm)
8	.205 (5.21)	.219 (5.56)	1.782 (45.26)	1.344 (34.14)
10			1.906 (48.41)	1.468 (37.29)
12			2.094 (53.19)	1.635 (41.53)
16			2.312 (58.72)	1.855 (47.12)
20	.266 (6.76)	.266 (6.76)	2.875 (73.03)	2.342 (59.49)
24		.281 (7.14)	3.094 (78.59)	2.562 (65.07)
32	.328 (8.33)	.312 (7.92)	3.953 (100.41)	3.359 (85.32)
40		.375 (9.53)	4.500 (114.30)	3.812 (96.82)
48		.625 (15.88)	5.000 (127.00)	4.312 (109.52)

Size number	Weight max (estimated) lbs (gram)		
	Steel	Al alloy	Titanium
8	.03 (14)	.01 (5)	.02 (9)
10	.05 (23)	.02 (9)	.03 (14)
12	.08 (36)	.03 (14)	.04 (18)
16			
20	.14 (64)	.05 (23)	.07 (32)
24	.17 (77)	.06 (27)	.09 (41)
32	.25 (113)	.09 (41)	.13 (59)
40	.45 (204)	.16 (73)	.21 (95)
48	.53 (240)	.19 (86)	.24 (109)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances linear dimensions ±.005 inch (0.13 mm) angles ±.5°.
4. Diameters C and D shall be concentric within .010 inch (0.25 mm) full indicator movement.
5. Unless otherwise specified, the surface roughness shall not exceed 100 microinches (25.4 µm) Ra in accordance with ASME B46.1.
6. Break all sharp edges; remove all loose or hanging burrs and slivers that may become dislodged.
7. For tube sizes -8 through -16, maximum operating temperature 275°F (135°C), maximum pressure 1500 psi (10 MPa).
8. For tube sizes -20 though -48, maximum operating temperature 275°F (135°C), maximum pressure 500 psi (3.4 MPa).
9. Reduction by forging draft angle of 7° maximum is permissible if forged.

FIGURE 2. Swivel fitting flange type II hexagon size 8 through 48 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

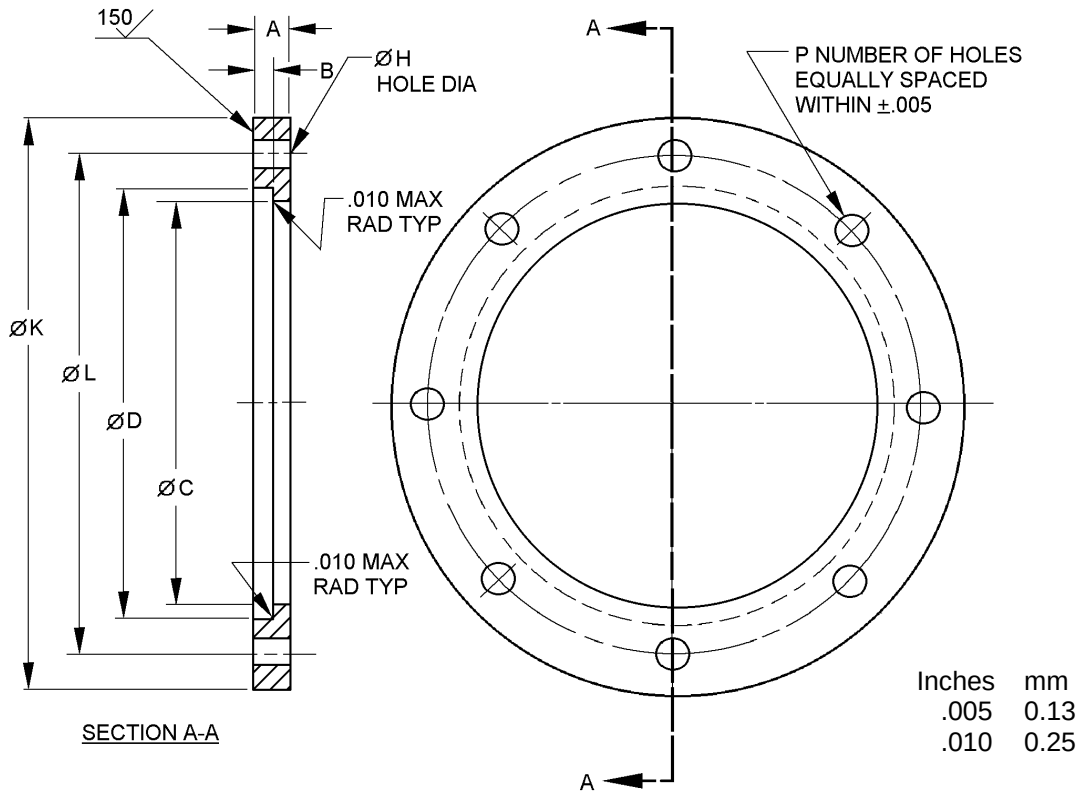

Size number	Tubing OD and hose ID inches (mm)	A +.015/ -.005 (+0.38/ -(0.13) inches (mm)	B +.005/ -.000 (+0.13/ -.000) inches (mm)	C dia (see note 4) .031 (0.79) inches (mm)	D dia (see note 4) inches (mm)		H dia +.010/ -.000 (+0.25/ -0.00) inches (mm)
56	3.500 (88.90)	.312 (7.92)	.168 (4.27)	3.968 (100.79)	4.234 (107.54)	+.010/ -.000 (+0.25/ -0.000)	.328 (8.33)
64	4.000 (101.60)			4.531 (115.09)	4.797 (121.84)		
80	5.000 (127.00)	.375 (9.53)	.188 (4.78)	5.531 (140.49)	5.797 (147.24)		
96	6.000 (152.40)			6.531 (165.89)	6.797 (172.64)	+.020/ -.000 (0.51/ -.000)	
112	7.000 (177.80)	.437 (11.10)	.200 (5.08)	7.594 (192.89)	7.860 (199.64)		

FIGURE 3. Swivel fitting flange type III round size 56 through 112.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

Size number	K dia (see note 8) ±.015 (±0.38) inches (mm)	L dia Ref inches (mm)	P number of holes
56	5.562 (141.27)	4.875 (123.83)	8
64	6.125 (155.58)	5.438 (138.13)	
80	7.125 (180.98)	6.438 (163.53)	10
96	8.125 (206.38)	7.438 (188.93)	12
112	9.188 (233.38)	8.500 (215.90)	14

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances linear dimensions ±.005 inch (0.13 mm) angles ±.5°.
4. Diameters C and D shall be concentric within .010 inch (0.25 mm) full indicator movement.
5. Unless otherwise specified, the surface roughness shall not exceed 100 microinches (2.54 µm) Ra in accordance with ASME B46.1.
6. Break all sharp edges; remove all loose or hanging burrs and slivers that may become dislodged.
7. Maximum operating temperature 275°F (135°C), maximum pressure 500 psi (3.4 MPa).
8. Reduction by forging draft angle of 7° maximum is permissible if forged.

FIGURE 3. Swivel fitting flange type III round size 56 through 112 - Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1, 2, and 3.

For nominal use on fuel and oil systems.

Materials: Materials shall be in accordance with SAE-AS4875.

Material designators (see table I): Designators for material types shall be in accordance with SAE-AS4875.

This standard takes precedence over documents referenced herein.

Referenced documents shall be of the issue in effect on dated of invitations for bid or request for quote.

Material and size designators shall be in accordance with table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

TABLE I. Material and size designators. 1/

Size number	Size number with letter material designator					
	Steel (Blank)	Aluminum alloy 2/	Aluminum alloy	CRES 2/	CRES	Titanium 3/
8	-8	-D8	-W8	-J8	-R8	-T8
10	-10	-D10	-W10	-J10	-R10	-T10
12	-12	-D12	-W12	-J12	-R12	-T12
16	-16	-D16	-W16	-J16	-R16	-T16
20	-20	-D20	-W20	-J20	-R20	-T20
24	-24	-D24	-W24	-J24	-R24	-T24
32	-32	-D32	-W32	-J32	-R32	-T32
40	-40	-D40	-W40	-J40	-R40	-T40
48	-48	-D48	-W48	-J48	-R48	-T48
56	-56	-D56	-W56	-J56	-R56	-T56
64	-64	-D64	-W64	-J64	-R64	-T64
80	-80	-D80	-W80	-J80	-R80	-T80
96	-96	-D96	-W96	-J96	-R96	-T96
112	-112	-D112	-W112	-J112	-R112	-T112

1/ Materials and designators blank/none, “D”,”W” “J”, “R”, and “T” are in accordance with SAE-AS4875.
2/ Inactive material codes: PINs with material code letters D (aluminum) and J Corrosion resistant steel (CRES) are inactive for new design. Use PINs with material code letter W (aluminum) and R (CRES) for new design.
3/ Titanium shall not be used in oxygen systems.

Finishes. Finishes for the flange shall be in accordance with SAE-AS4875.

Finish designators shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

TABLE II. Flange finish code. 1/

PIN code dash letter	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2.
	Aluminum 2/	Anodize in accordance with MIL-A-8625, type II.
	CRES	No additional finish. Passivation in accordance with SAE-AMS2700, type 6 or 7.
	Titanium 3/	Fluoride phosphated in accordance with SAE-AMS2486.
-A	Steel	Aluminum-nickel in accordance with ASTM F1136/F1136M, grade 3, NC
-D	Aluminum 2/	Anodize above with NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-81706, type II, class 1A.
DA	Aluminum 2/	Chemical conversion coating in accordance with, MIL-DTL-5541, type II, class 3
-CN	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2 with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
-G	Steel	Zinc plating with colorless passivate in accordance with ASTM B633, type V, Fe/Zn 25.
-H	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 5/
-J	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5.
-N	Steel	NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
-R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5.
-T	Titanium 3/ 4/	Anodized in accordance with SAE-AMS2488, type 2
-V	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 1.
-Z	Steel	Zinc may be any zinc plating's from PIN codes H, J, R, V. 6/
-ZN	Steel	Zinc may be any zinc plating's from PIN codes H, J, R, V with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A. 6/

1/ All finished materials shall withstand 96 hours salt spray test minimum.
2/ Aluminum alloys 2014 and 2024 shall be dyed light blue. Unless otherwise specified aluminum alloy 7075 shall be dyed brown.
3/ Titanium shall not be used in oxygen systems.
4/ Color equivalent to numbers /36076, /36081, /36099, /36118, /36134, /36152, /36170, /36173, and /36176 in accordance with FED-STD-595.
5/ Hexavalent chromium free.
6/. Not for use in Aircraft.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using the brush plating process below. The term "trivalent wrenchability" is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching

a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS2451/5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS2451/9.
c. Brush plating of NAVAIR TCP shall be in accordance with MIL-DTL-81706, type II, class 1A, material form 1 through 6, application method B. Example of a PIN: M817062A6B.

PIN example:

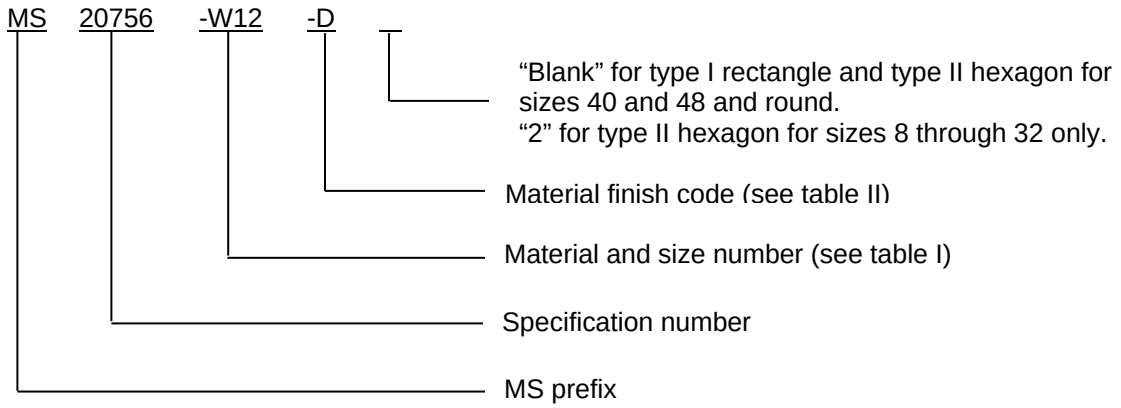

MS20756-W12-D indicates: Flange, .750 inch (19.05 mm) tube ID, aluminum anodized with NAVAIR TCP, type I rectangle.

MS20756-W12-D2 indicates: Flange, .750 inch (19.05 mm) tube ID, aluminum anodized with NAVAIR TCP, type II hexagon.

MS20756-56-CN indicates: Flange, 3.500 inch (88.90 mm) tube ID, steel, cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2 with NAVAIR TCP in accordance with MIL-DTL-81706, type III round.

Marking. The complete PIN shall be permanently marked on an unfinished surface.

Guidance on use of alternative parts with less hazardous or nonhazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit and function requirements of their application.

Supersession data:

Aluminum alloys 2014 and 2024 "D" designator is inactive for new design. For new design use aluminum alloy 7075 "W" designator.

CRES alloy 304 "J" designator is inactive for new design. For new design use CRES alloy 321 "R" designator.

For nominal use on fuel and oil systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to SAE-AS4875, this document references the following:

MIL-A-8625	FED-STD-595/36152	SAE-AMS-QQ-P-416
MIL-DTL-5541	FED-STD-595/36170	SAE-AMS2417
MIL-DTL-16232	FED-STD-595/36173	SAE-AMS2451/5
MIL-DTL-81706	FED-STD-595/36176	SAE-AMS2451/9
FED-STD-595/36076	ASME B46.1	SAE-AMS2486
FED-STD-595/36081	ASTM B633	SAE-AMS2488
FED-STD-595/36099	ASTM B695	SAE-AMS2700
FED-STD-595/36118	ASTM F1136/F1136M	
FED-STD-595/36134	SAE-AMS-C-81562	

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2014-011)

Review activities:
Army - AT
Navy - SA
Air Force - 85

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.