
FED. SUP CLASS
4730

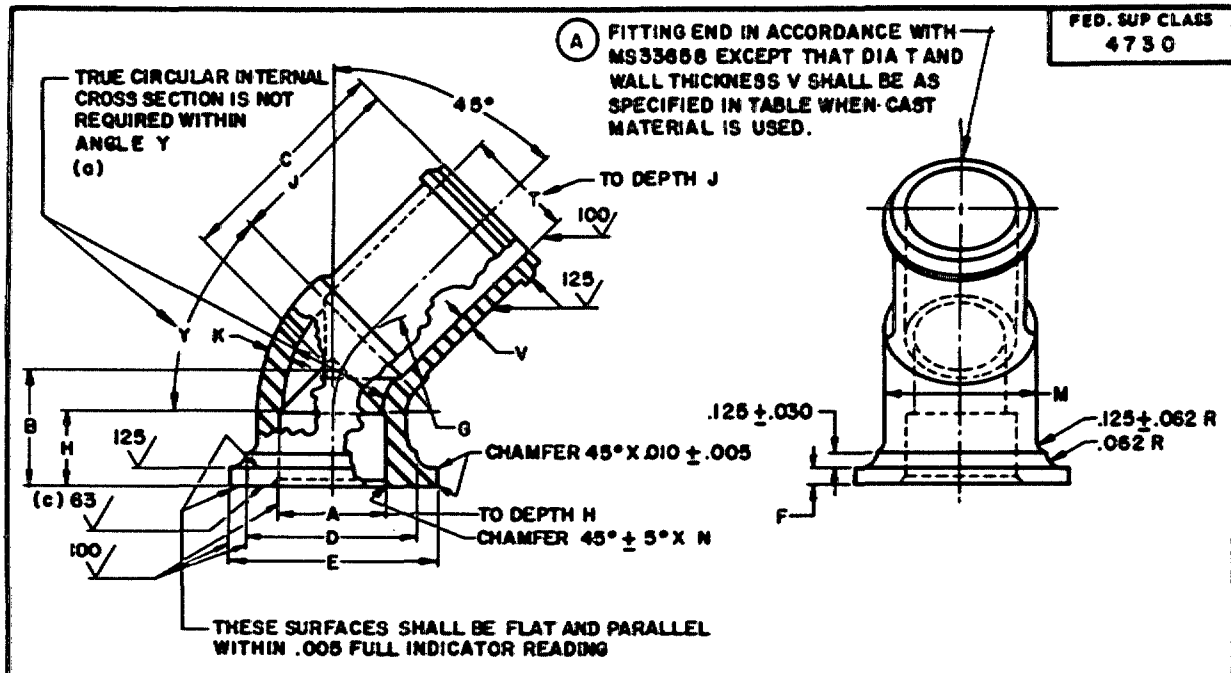

(a) INTERNAL FLOW PASSAGE AROUND BEND SHALL BE SMOOTH AND FREE FROM PROJECTIONS.
(b) DIAMETERS A, D, AND E SHALL BE CONCENTRIC WITH EACH OTHER WITHIN .010 FULL INDICATOR READING.
(c) ANNULAR TOOL MARKS UP TO 63 RHR MAX WILL BE ALLOWED.
REDUCTION BY FORGING DRAFT ANGLE OF 7° MAXIMUM IS PERMISSABLE.
POROSITY TEST: FINISHED CASTINGS SHALL NOT LEAK WHEN SUBJECTED TO 100-PSI AIR PRESSURE AND SUBMERGED IN WATER FOR 3 MINUTES MINIMUM.
FOR HOSE SIZES THRU 1 INCH: MAXIMUM OPERATING TEMPERATURE 275°F, MAXIMUM PRESSURE 1500 PSI.
FOR HOSE SIZES EXCEEDING 1 INCH: MAXIMUM OPERATING TEMPERATURE 275°F, MAXIMUM PRESSURE 500 PSI.
MATERIAL: ALUMINUM-ALLOY FORGING, SPECIFICATION QQ-A-367, CLASS 5 OR 1. OPTIONAL MATERIAL: PERMANENT MOLD ALUMINUM-ALLOY CASTING, SPECIFICATION QQ-A-596.
(A) UNLESS OTHERWISE SPECIFIED, SURFACE ROUGHNESS SHALL NOT EXCEED 100 MICROINCHES RHR WHERE SHOWN 100 SEE STANDARD DOD-STD-100.
FINISH: ALUMINUM-ALLOY, ANODIZED, SPECIFICATION MIL-A-8625, DYE LIGHT BLUE.
FITTINGS SHALL BE PERMENENTLY MARKED WITH MS PART NO. ON AN UNFINISHED SURFACE.
FOR NOMINAL USE ON FUEL AND OIL SYSTEMS.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 9 AUG 67 REVISED (A) 10 Aug 82

(A) DENOTES CHANGES

P.A. AIR FORCE - 82 (A) Other Cust NAVY - AS AIR FORCE - 99	TITLE ELBOW, HOSE, FLANGED, SWIVEL, 45°	MILITARY STANDARD MS20758
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN756 (A)	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. PROJECT NO. 4730-0209

User activities:
Review activities: DLA-CS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

(A)

DASH NO.	HOSE ID	(b) A ±.003 DIA	B +.047 -.000	C +.047 -.000	(b) D +.000 -.015 DIA	(b) E +.000 -.005 DIA	F +.000 -.005	G RAD
-D12	.750	.609	.812	1.812	.938	1.250	.156	.594
-D12-16			.875			1.500		
-D16	1.000	.844		1.875	1.188			.719
-D20	1.250	1.078	1.000	2.000	1.500	1.844		.875
-D20-24			1.062			2.125		
-D24	1.500	1.312	1.094	2.125	1.750			1.000
-D32	2.000	1.781	1.281	2.250	2.375	2.750	.188	1.312
-D40	2.500	2.281	1.469	2.375	2.875	3.281		1.562
-D48	3.000	2.781	1.562	2.500	3.375	3.781		1.812

DASH NO.	H +.047 -.000	J +.047 -.000	K MIN	K MAX	M ±.015 DIA	N DIA	T MIN DIA	V MIN	WEIGHT MAX
-D12	.562	1.562	.125	.164	.922	.669	.609	.065	.07
-D12-16									.09
-D16			.141	.176	1.172	.904	.859		.11
-D20	.625	1.625	.156	.221	1.484	1.138	1.059	.090	.19
-D20-24	.688								.22
-D24		1.688	.172	.234	1.734	1.372	1.309		.27
-D32	.750		.203	.322	2.359	1.841	1.793	.100	.52
-D40	.812	1.719	.234	.333	2.859	2.341	2.293		.74
-D48		1.750	.250	.344	3.359	2.841	2.793		.97

APPROVED 9 AUG 57 REVISED (A) 10 Aug 82

User activities:

Review activities: DLA-CS

This military standard is approved by the Department AND AGENCIES OF THE DEPARTMENT OF DEFENSE. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE- 82 (A)
Other Cust
NAVY-AS
AIR FORCE-99

PROCUREMENT SPECIFICATION
NONE

TITLE
ELBOW, HOSE, FLANGED, SWIVEL, 45°

SUPERSEDES:
~~AN750~~ (A)

MILITARY STANDARD
MS20758

SHEET 2 OF 2

DD FORM SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 4730-0209

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.