FED. SUP CLASS
5940

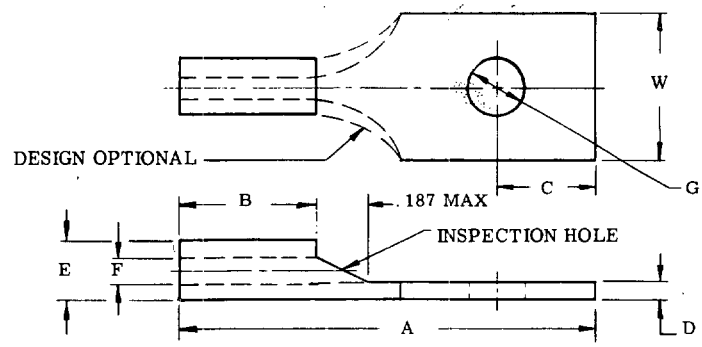


TABLE I

DASH NO.	WIRE SIZE	STUD SIZE	A MAX	B MIN	C ±.010	D MAX	D MIN	E	F	G MAX	G MIN	W MAX	W MIN	MIL-T-16366 (SHIPS) REFERENCE
(E) 31		2 (.086)	.780	.240						.098	.090	.187	.177	
1		4 (.112)			.117					.122	.114	.228	.208	L-58, 1-2
2		5 (.125)	.841							.140	.128	.244	.224	L-57, 1-2
3		6 (.138)	.904		.187					.152	.142	.260	.240	L-59, 1-2
4			.966		.218									L-53, 1-2
5	22-18	8 (.164)	1.029	.250	.250	.048	.023	.165 / .110	.070 / .052	.178	.168	.322	.302	L-61, 1-2
6		10 (.190)								.203	.193			L-63, 1-2
7		12 (.216)	1.186		.328					.236	.220	.385	.365	L-64, 1-2
8												.447	.427	L-51, 1-2
9		1/4 (.250)								.275	.260	.478	.458	L-50, 1-2
10		8 (.164)	1.498		.281					.178	.168	.385	.365	L-52, 1-2
11		4 (.112)	.842		.117					.122	.114	.228	.208	L-58, 2-1/2-4
12		5 (.125)	.904							.140	.128	.244	.224	L-57, 2-1/2-4
13		6 (.138)	.967		.187					.152	.142	.260	.240	L-59, 2-1/2-4
14			1.029		.218									L-53, 2-1/2-4
15	16-14	8 (.164)	1.092	.250	.250	.060	.023	.192 / .139	.090 / .081	.178	.168	.322	.302	L-61, 2-1/2-4
16		10 (.190)								.203	.193			L-63, 2-1/2-4
17		12 (.216)	1.249		.328					.236	.220	.385	.365	L-64, 2-1/2-4
18												.447	.427	L-51, 2-1/2-4
19		1/4 (.250)								.275	.260	.478	.458	L-50, 2-1/2-4
20		8 (.164)	1.560		.281					.178	.168	.385	.365	L-52, 2-1/2-4
21		4 (.112)	.967		.117					.127	.114	.228	.208	L-58, 6-9
22		5 (.125)	1.029							.140	.128	.244	.224	L-57, 6-9
23			1.092		.187					.152	.142	.260	.240	L-59, 6-9
24		6 (.138)	1.154		.218									L-53, 6-9
25		8 (.164)	1.217	.250	.250	.046	.032	.255 / .199	.135 / .128	.178	.168	.322	.302	L-61, 6-9
26	12-10	10 (.190)								.203	.193			L-63, 6-9
27		12 (.216)	1.373		.328					.236	.220	.385	.365	L-64, 6-9
28												.447	.427	L-51, 6-9
29		1/4 (.250)								.275	.260	.478	.458	L-50, 6-9
30		8 (.164)	1.685		.281					.178	.168	.385	.365	L-52, 6-9

TABLE II (REF)

WIRE SIZE	NAVY CABLE SIZE
22-18	1 (1)
	1 (7)
	1 (10)
	1-1/2 (1)
	1-1/2 (7)
	1-1/2 (16)
	1-1/2 (41)
	2 (7)
16-14	2-1/2 (1)
	2-1/2 (19)
	2-1/2 (26)
	3 (7)
	4 (1)
	4 (19)
	4 (7)
	4 (41)
12-10	6 (7)
	6 (19)
	9 (7)
	9 (37)

REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
3. DIMENSIONS IN INCHES.
(B) 4. TENSILE STRENGTH: THE TENSILE STRENGTH SHALL BE THAT SPECIFIED IN PROCUREMENT SPECIFICATION.
5. DESIGN AND CONSTRUCTION: LUG TERMINALS SHALL BE OF THE DESIGN, CONSTRUCTION AND PHYSICAL DIMENSIONS SPECIFIED IN THE FIGURE AND TABLE I AND SHALL MEET THE PERFORMANCE REQUIREMENTS OF MIL-T-7928 WHEN CRIMPED ON MIL-C-915 AND MIL-C-2194 CABLE WITH A MIL-C-22520/25 CRIMPING TOOL AND MIL-C-22520/24 CRIMPING TOOL. THIS STANDARD DEPICTS ONLY GENERAL DESIGN CHARACTERISTICS AND IS NOT INTENDED TO LIMIT SPECIFIC MANUFACTURING PROCESSES. WIRE INSULATION SUPPORT NOT REQUIRED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) REVISED AND REDRAWN

APPROVED 26 SEPT 67 REVISED (A) 12 MARCH 1973 (B) 8 JUNE 1981

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust: Army - ER; USAF - 99	TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1 FOR 175°C TOTAL CONDUCTOR TEMPERATURE	MS21003
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. Project No. 5940-0892 PLATE NO. 15320

USER SYMBOLS: NAVY - MC

REVIEWER SYMBOLS: NAVY - SH, EC; ARMY - AV; USAF - 11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5940

USER SYMBOLS:
NAVY - MC

REVIEWER SYMBOLS:
NAVY - SH, EC
ARMY - AV
USAF - 11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

METRIC TABLE FOR MS21003B

(B)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.023	0.58	.135	3.43	.220	5.59	.478	12.14
.032	0.81	.138	3.51	.224	5.69	.780	19.81
.046	1.17	.139	3.53	.228	5.79	.841	21.36
.048	1.22	.140	3.56	.236	5.99	.842	21.39
.052	1.32	.142	3.61	.240	6.10	.904	22.96
.060	1.52	.152	3.86	.244	6.20	.966	24.54
.070	1.78	.164	4.17	.250	6.35	.967	24.56
.081	2.06	.165	4.19	.255	6.48	1.029	26.14
.086	2.18	.168	4.27	.260	6.60	1.092	27.74
.090	2.29	.177	4.50	.275	6.99	1.154	29.31
.098	2.49	.178	4.52	.281	7.14	1.186	30.12
.110	2.79	.187	4.75	.302	7.67	1.217	30.91
.112	2.84	.190	4.83	.322	8.18	1.249	31.72
.114	2.90	.192	4.88	.328	8.33	1.373	34.87
.117	2.97	.193	4.90	.365	9.27	1.498	38.05
.122	3.10	.199	5.05	.385	9.78	1.560	39.62
.125	3.18	.203	5.16	.427	10.85	1.685	42.80
.127	3.23	.208	5.28	.447	11.35		
.128	3.25	.218	5.54	.458	11.63		

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/3931

APPROVED 26 SEPT 67 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P.A.
NAVY - AS
Other Cust
Army - ER
USAF - 99

TITLE
TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1 FOR 175°C TOTAL CONDUCTOR TEMPERATURE

MILITARY STANDARD
MS21003

ACQUISITION SPECIFICATION
MIL-T-7928

SUPERSEDES

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.