FED. SUP CLASS
5310

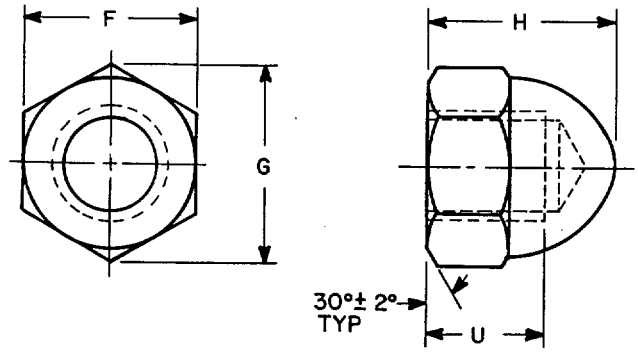


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER 1/ CARBON STEEL	DASH NUMBER 1/ CRES	DASH NUMBER 1/ BRASS	DASH NUMBER 1/ NYLON	SIZE	THREAD -2B	F WIDTH ACROSS FLATS NOM	F WIDTH ACROSS FLATS MAX	F WIDTH ACROSS FLATS MIN	G WIDTH ACROSS CORNERS MAX	G WIDTH ACROSS CORNERS MIN	H HEIGHT MIN	U FULL THREAD MIN
1 61	21 81	411 201	511 301	.138	32UNC 40UNF	5/16	.3125	.302	.361	.344	.344	.156
2 62	22 82	412 202	512 302	.164	32UNC 36UNF	5/16	.3125	.302	.361	.344	.344	.156
3 63	23 83	413 203	513 303	.190	24UNC 32UNF	3/8	.3750	.362	.433	.413	.406	.187
5 65	25 85	415 205	515 305	.250	20UNC 28UNF	7/16	.4375	.428	.505	.488	.469	.250
6 66	26 86	416 206	516 306	.3125	18UNC 24UNF	1/2	.5000	.489	.577	.557	.531	.312
7 67	27 87	417 207	517 307	.375	16UNC 24UNF	9/16	.5625	.551	.650	.628	.625	.375
~~8~~ ~~68~~	~~28~~ ~~88~~	~~418~~ ~~208~~		~~.4375~~	~~14UNC~~ ~~20UNF~~	~~5/8~~	~~.6250~~	~~.612~~	~~.722~~	~~.698~~	~~.690~~	~~.440~~
9 69	29 89	419 209	519 309	.500	13UNC 20UNF	3/4	.7500	.736	.866	.840	.812	.500
~~10~~ ~~70~~	~~30~~ ~~90~~	~~420~~ ~~210~~		~~.5625~~	~~12UNC~~ ~~18UNF~~	~~7/8~~	~~.8750~~	~~.861~~	~~1.010~~	~~.982~~	~~.940~~	~~.560~~
11 71	31 91	421 211	521 311	.625	11UNC 18UNF	15/16	.9375	.922	1.083	1.051	1.000	.625
12 72	32 92	422 212	522 312	.750	10UNC 16UNF	1-1/16	1.0625	1.045	1.227	1.191	1.156	.750
~~13~~ ~~73~~	~~33~~ ~~93~~	~~423~~ ~~213~~		~~.875~~	~~9UNC~~ ~~14UNF~~	~~1-1/4~~	~~1.2500~~	~~1.231~~	~~1.443~~	~~1.403~~	~~1.360~~	~~.880~~
14 74	34 94	424 214	524 314	1.000	8UNC 12UNF	1-7/16	1.4375	1.417	1.660	1.615	1.547	1.000
~~15~~ ~~75~~	~~35~~ ~~95~~	~~425~~ ~~215~~		~~1.125~~	~~7UNC~~ ~~12UNF~~	~~1-5/8~~	~~1.6250~~	~~1.602~~	~~1.876~~	~~1.826~~	~~1.750~~	~~1.120~~
16 76	36 96	426 216	526 316	1.250	7UNC 12UNF	1-13/16	1.8125	1.788	2.093	2.038	1.953	1.240

1/ Lined out dash numbers are
INACTIVE FOR NEW DESIGN AFTER 18 March 1974.

Ⓔ DENOTES CHANGE

INCH-POUND

APPROVED 28 APR 60 REVISED Ⓔ 15 MAR 90

USER ACTIVITIES:
ARMY - AT, ME
NAVY - AS, MC, OS, SH

REVIEWER ACTIVITIES:
ARMY - AV
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust AIR FORCE-82		NUT, PLAIN, CAP, LOW CROWN, UNC-2B AND UNF-2B	MS24679
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: BRBX1 AND BRBX2		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

REQUIREMENTS:

1. MATERIALS:
   a. STEEL, CARBON; TYPE 1018 (UNS G10180), TYPE 1020 (UNS G10200) OR TYPE 1118 (UNS G11180) IN ACCORDANCE WITH ASTM A576. MINIMUM ULTIMATE TENSILE STRENGTH OF 60,000 PSI REQUIRED.

   b. STEEL, CORROSION RESISTANT; TYPE 416 (UNS S41600) IN ACCORDANCE WITH ASTM A582. MINIMUM ULTIMATE TENSILE STRENGTH OF 80,000 PSI REQUIRED.

   c. BRASS; COMPOSITION 11, IN ACCORDANCE WITH QQ-B-613. MINIMUM ULTIMATE TENSILE STRENGTH OF 55,000 PSI REQUIRED.

   d. PLASTIC, POLYAMIDE (NYLON); IN ACCORDANCE WITH DESIGNATION PA 111 OF ASTM D4066, COLOR, NATURAL.

2. FINAL PROTECTIVE FINISH:

   a. STEEL, CARBON SHALL HAVE CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2.

   b. STEEL, CORROSION RESISTANT SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH QQ-P-35, TYPE II.

   c. BRASS SHALL HAVE BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495.

3. THREAD: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. INSPECTION OF THREAD ACCEPTABILITY SHALL BE IN ACCORDANCE WITH FED-STD-H28/20 SYSTEM 21.

4. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER.

EXAMPLE: MS24679-1
- -1 — DASH NUMBER
- MS24679 — BASIC MS NUMBER

MS24679-1 INDICATES: NUT, PLAIN, CAP, LOW CROWN, .138-32 UNC-2B THREAD, CARBON STEEL, CADMIUM PLATED.

NOTES:

Ⓔ 1. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS AND TOLERANCES NOT SPECIFIED SHALL BE IN ACCORDANCE WITH SAE J483.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

TABLE II
INTERCHANGEABILITY

THE FOLLOWING DASH NUMBERS AS GIVEN IN THE ORIGINAL ISSUE OF THIS STANDARD ARE CANCELED AFTER 15 JUNE 1967. THE CANCELED NUTS SHOULD BE USED FOR MAINTENANCE PURPOSES UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING NUTS FOR NEW DESIGN.

PART NUMBER		PART NUMBER		PART NUMBER	
CANCELED MS24679	SUPERSEDING MS24679	CANCELED MS24679	SUPERSEDING MS24679	CANCELED MS24679	SUPERSEDING MS24679
41	411	52	422	107	207
42	412	53	423	108	208
43	413	54	424	109	209
45	415	55	425	110	210
46	416	56	426	111	211
47	417	101	201	112	212
48	418	102	202	113	213
49	419	103	203	114	214
50	420	105	205	115	215
51	421	106	206	116	216

Ⓔ FOR CHANGES SEE PAGE 2

APPROVED 28 APR 60 REVISED Ⓔ

USER ACTIVITIES:
ARMY - AT, ME
NAVY - AS, MC, OS, SH

REVIEWER ACTIVITIES:
ARMY - AV
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust AIR FORCE-82		NUT, PLAIN, CAP, LOW CROWN, UNC-2B AND UNF-2B	MS24679
PROCUREMENT SPECIFICATION: FF - N - 836	SUPERSEDES: BRBX1 AND BRBX2		PAGE 2 OF 2

Source: https://quicksearch.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.