

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-7974


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form approved
OMB No. 0704-0188

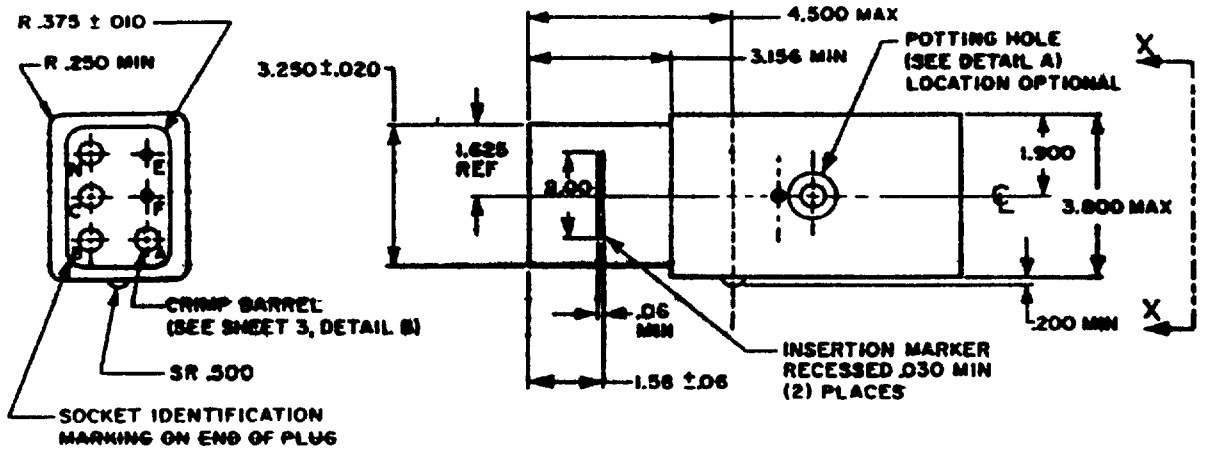


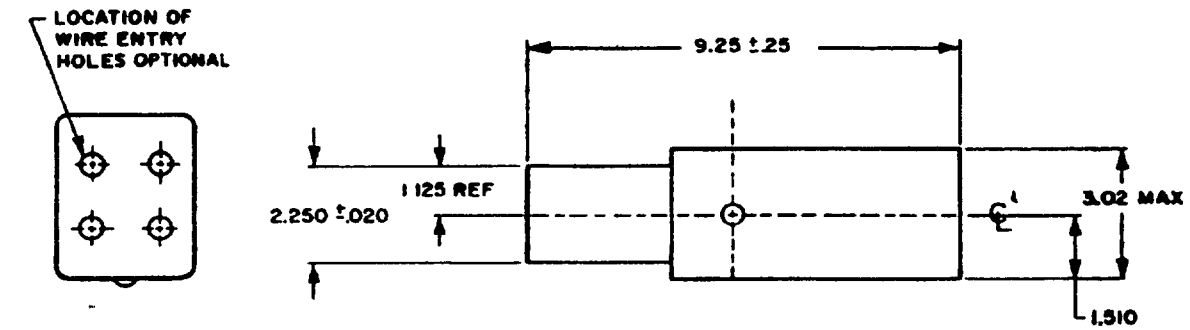

VIEW X-X GROMMET MS25486-16 TO -19



VIEW X-X GROMMET MS25486-30 TO -33

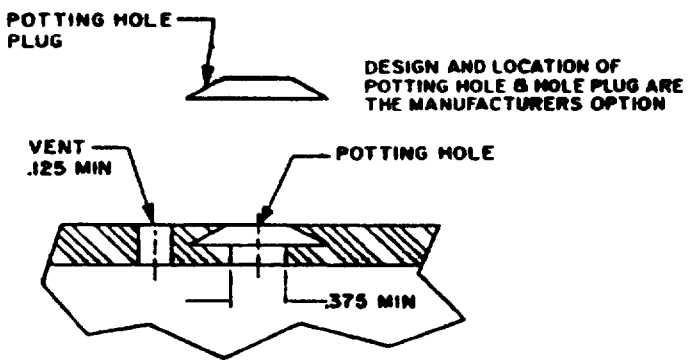

DETAIL A
TYPICAL CROSS-SECTION
DASH -18, -19, -32, -33

PREPARING ACTIVITY NAVY-AS CUSTODIANS ARMY-CR NAVY-AS AIR FORCE-85 DLA-ES REVIEW AF-80, 82, 11 ARMY-AV DLA-ES USER: ARMY-AT, NAVY-MC, SH PROJECT NUMBER 5935-3884	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ATTACHABLE, EXTERNAL ELECTRIC POWER, AIRCRAFT, 115/200 VOLT, 400 HERTZ	SPECIFICATION SHEET NUMBER MS25486H 31 MARCH 1992 SUPERSEDING MS25486, REV G, 8 JANUARY 1982 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:11Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-7974

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form approved
OMB No. 0704-0

TABLE I METRIC CONVERSIONS

INCH	MM	INCH	MM	INCH	MM
.010	.25	.376	9.53	1.610	38.35
.020	.51	.438	11.13	1.580	40.13
.035	.89	.469	11.63	1.625	41.28
.050	.76	.500	12.70	1.900	48.26
.060	1.52	.510	13.16	2.000	50.80
.125	3.18	.528	13.41	2.250	57.15
.140	3.56	.558	14.17	3.020	76.71
.156	3.43	.578	14.68	3.156	80.16
.200	5.08	.620	15.75	3.250	82.55
.218	5.44	.640	16.26	3.880	98.52
.230	5.84	1.000	25.40	4.500	114.30
.250	6.35	1.125	28.58	9.250	234.95

TABLE II PART NUMBER, WIRE SIZE, DIMENSIONS, AND SUPERSEDED PART NUMBERS

PART NO	A,B,C,N WIRE SIZE	E,F WIRE SIZE	SUPERSEDES	DESCRIPTION
MS25486-16 MS25486-17	0 00	SEE NOTE 6	MS25486-1 MS25486-3	FOR CABLE WIRES WITHOUT CONTROL LEADS.
MS25486-18 MS25486-19	0 00	SEE NOTE 6	——— ———	*FOR CABLE WIRES WITHOUT CONTROL LEADS WITH POTTING HOLE (SEE REQUIREMENT 8).
MS25486-30 MS25486-31	0 00	12	——— ———	FOR CABLE WITH CONTROL LEADS.
MS25486-32 MS25486-33	0 00	12	——— ———	*FOR CABLE WITH CONTROL LEADS WITH POTTING HOLE (SEE REQUIREMENT 8).

*AIR FORCE USE ONLY

PREPARING ACTIVITY NAVY-AS
CUSTODIANS ARMY-CR NAVY AS
AIR FORCE-85 DLA ES
REVIEW: AF-80, 82, 11 ARMY-AV DLA-ES
USER ARMY-AT NAVY-MC, SH
PROJECT NUMBER 5935-3684

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ATTACHABLE, EXTERNAL ELECTRIC POWER, AIRCRAFT, 115/200 VOLT, 400 HERTZ

SPECIFICATION SHEET NUMBER
MS25486H 31 MARCH 1992
SUPERSEDING
MS25486, REV G, 8 JANUARY 1982
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release distribution is unlimited


DD FORM 672 MAY 1988

Source: https://assist.dla.mil -- Downloaded: 2020-10-25T15:11Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-7974

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form approved
OMB No. 0704-0188

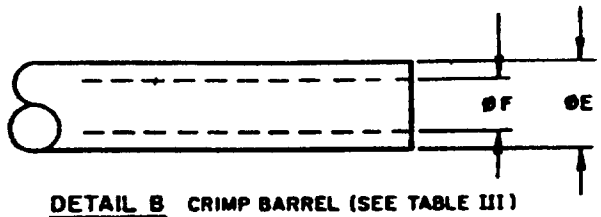

DETAIL B CRIMP BARREL (SEE TABLE III)
DASH -16 THRU -19 AND -30 THRU -33

TABLE III WIRE SIZE AND CRIMP BARREL DIMENSIONS

WIRE SIZE	ØE	ØF
0	.578 .558	.458 .438
00	.640 .620	.528 .518
12	230 .215	.135 .129

REQUIREMENTS

1. MATERIAL SEE ACQUISITION SPECIFICATION
2. MOLD OR STAMP WIRE SIZE ON CRIMP BARREL, REQUIRED ON SOCKET CONTACTS OF ATTACHABLE PLUGS ONLY
3 DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE DECIMALS ±.025.
4 METRIC EQUIVALENTS (TO NEAREST 01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.40MM
5. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETERICAL ABOUT CENTERLINES
6. PLUGS USED WITH CABLES WITHOUT CONTROL LEADS, SHALL HAVE SOCKETS "E" AND "F" CONNECTED TOGETHER WITHIN THE PLUG BY A COPPER OR BRASS JUMPER HAVING A CROSS-SECTIONAL AREA OF AT LEAST 6530 CIRCULAR MILS
7. EACH PLUG, WHEN MATED WITH MS90362-3 RECEPTACLE, SHALL MEET ALL THE REQUIREMENTS OF THE ACQUISITION SPECIFICATION.
8 MS25486-18, -19, -32, -33 PLUGS WITH POTTING HOLES ARE FOR AIR FORCE USE ONLY AFTER ATTACHMENT MS25486-18, -19, -32 AND -33 SHALL BE FILLED WITH MIL-S-8516 OR MIL-S-23586 SEALING COMPOUND THROUGH THE PRECUT POTTING HOLES
9 CRIMP 12 AWG WIRES WITH MIL-C-22520/24 CRIMP TOOL. CRIMP 1/0 AND 2/0 AWG WIRES WITH MS25441 CRIMP TOOL USING MS90485 CRIMP DIES
10 ONLY NON-CORROSIVE HARDWARE SHALL BE USED IN THE MANUFACTURE OF THE PLUG

REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF THE CHANGES

PREPARING ACTIVITY NAVY-AS CUSTODIANS ARMY-CR NAVY-AS AIR FORCE-85 DLA-ES REVIEW AF-80, 82, 11 ARMY-AV DLA-ES USER ARMY-AT NAVY-MC, SH PROJECT NUMBER 5935-3684	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ATTACHABLE, EXTERNAL ELECTRIC POWER, AIRCRAFT, 115/200 VOLT, 400 HERTZ	SPECIFICATION SHEET NUMBER MS25486H 31 MARCH 1992 SUPERSEDING MS25486, REV G, 8 JANUARY 1982 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:11Z
Check the source to verify that this is the current version before use.