


FED. SUP CLASS
2620

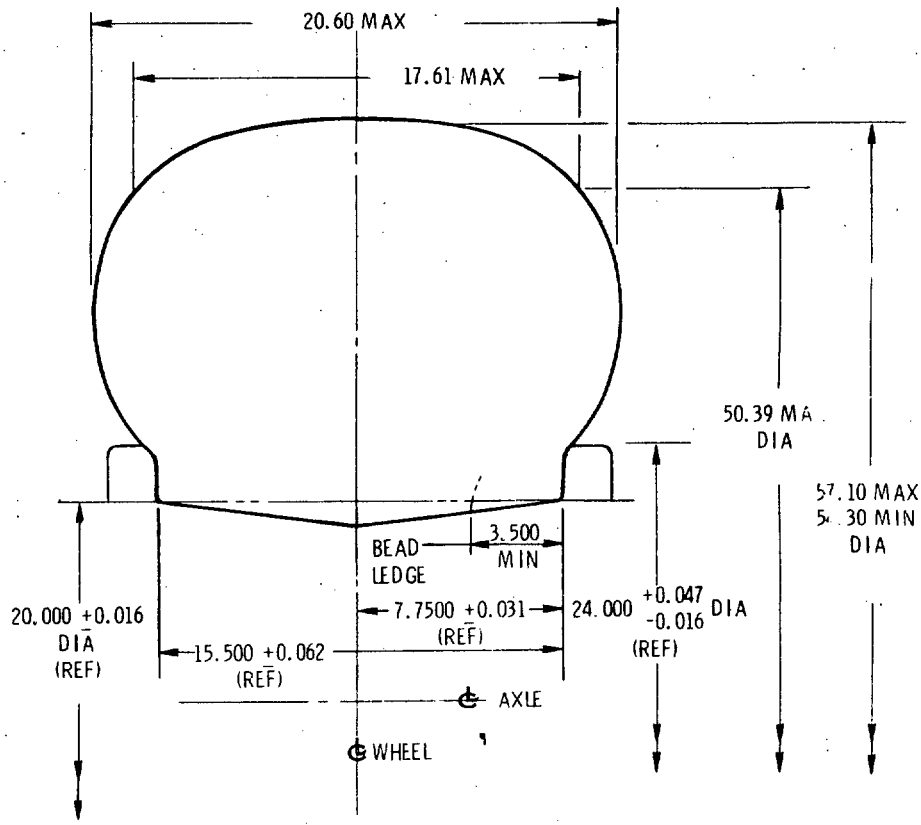


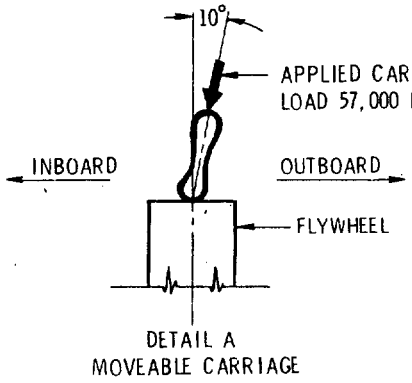

DETAIL A
MOVEABLE CARRIAGE

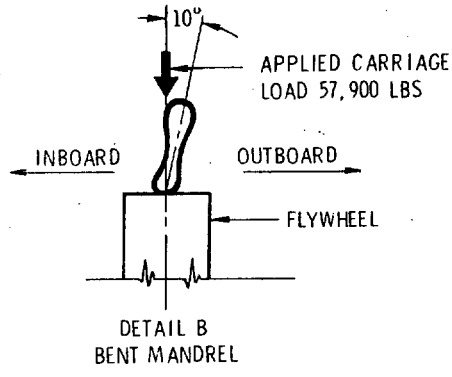

DETAIL B
BENT MANDREL

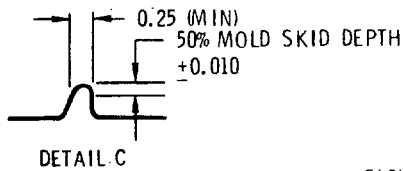

DETAIL C

FIGURE 1

APPROVED 12 OCT 1973 REVISED (A) 28 SEPT 1977

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. 99 Other Cust NAVY-AS	TITLE TIRE - PNEUMATIC REBUILT, TYPE VII 20.00-20/26 PR	MILITARY STANDARD MS27823
PROCUREMENT SPECIFICATION MIL-R-7726	SUPERSEDES: AF DWG NO. 68D293	SHEET 1 OF 2

DD FORM 1 SEP 63 672-1 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2620

GENERAL NOTES

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. ANY DEVIATION FROM GIVEN DIMENSIONS MUST BE AUTHORIZED IN WRITING BY THE PROCURING AGENCY.

3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BIDS

TIRE NOTES

THE TIRE SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF SPECIFICATION MIL-R-7726 AND SHALL BE CAPABLE OF OPERATING AS A TUBELESS OR TUBE TYPE TIRE AND SHALL COMPLY WITH THE REQUIREMENTS LISTED BELOW

SIZE	PLY RATING	STATIC LOAD (LBS)	INFLATION PRESSURE (PSI)	BURST PRESSURE PSI	BEAD WIDTH IN(MAX)*	WEIGHT LB (MAX)	STATIC UNBALANCE IN OZ (MAX)	TREAD	MOLD SKID DEPTH IN (MIN)
20.00-20	26	46,500	125	460	3.50	284	90	NOTE 2	40

*MAXIMUM BEAD FOR FLASH OF 3/8 INCH NOT INCLUDED

1. THE TIRE SHALL SATISFACTORILY WITHSTAND 130 CYCLES OF TEST "A", 130 CYCLES OF TEST "B", AND 60 CYCLES OF TEST "C", WITHOUT EVIDENCE OF FAILURE. FIFTY PERCENT OF THE CYCLES SHALL BE RUN AT 39% DEFLECTION THE CYCLES RUN AT 39% DEFLECTION SHALL BE RUN FIRST.

A. "A" TAXI-TAKEOFF

THE TIRE SHALL BE LOADED TO 46,500 POUNDS AGAINST A STATIONARY FLYWHEEL. THE FLYWHEEL SHALL THEN BE ACCELERATED TO 30 MPH AND THE TIRE SHALL BE ROLLED (SIMULATING TAXI) AT CONSTANT SPEED FOR 13,500 FEET. STOP THE FLYWHEEL KEEPING THE TIRE FULLY LOADED. THE FLYWHEEL SHALL THEN BE ACCELERATED (SIMULATING TAKEOFFS) AT AN AVERAGE RATE OF FOUR FT/SEC/SEC TO 200 MPH. THE LOAD SHALL REMAIN CONSTANT FOR THE FIRST 15 SECONDS AND THEN DECREASED LINEARLY WITH TIME TO 15,000 POUNDS. 60 SECONDS AFTER START OF THE TAKEOFF ROLL AND THEN DECREASED TO ZERO POUNDS IN APPROXIMATELY 75 SECONDS AFTER START OF THE TAKEOFF ROLL. THE TIRE SHALL BE UNLOADED AFTER A ROLL OF 11,250 FEET HAS BEEN COVERED.

B. "B" LANDING-TAXI ROLL

THE TIRE SHALL BE LANDED AGAINST A FLYWHEEL ROTATING AT A SPEED OF 160 MPH. THE FLYWHEEL SHALL HAVE AN AVERAGE DECELERATION OF 4.5 FT/SEC/SEC FROM 160 MPH TO 30 MPH. THE LOAD SHALL INCREASE LINEARLY FROM ZERO AT INSTANT OF LANDING TO 8,000 POUNDS IN FIVE SECONDS AND THEN INCREASE LINEARLY TO 27,000 POUNDS IN 30 SECONDS AFTER LANDING AND HELD AT THIS LOAD UNTIL THE TOTAL ROLL DISTANCE OF 6,040 FEET HAS BEEN COVERED IN APPROXIMATELY 43 SECONDS. THE TIRE SHALL THEN BE TAXIED AT 30 MPH FOR 13,500 FEET AT 27,000 POUND LOAD.

C. "C" TAXI AND CAMBER:

(1) ACCELERATE THE FLYWHEEL TO 30 MPH AND MAINTAIN THIS SPEED THROUGHOUT THE TEST.

(2) LAND THE TIRE ON THE FLYWHEEL IN A POSITION OF 10° CAMBER.

(3) INCREASE THE CARRIAGE LOAD LINEARLY WITH TIME FROM ZERO TO 57,000 LBS. FOR DETAIL A. OR 57,900 LBS FOR DETAIL B. WITHIN 1 1/2 SECONDS AFTER LANDING AND MAINTAIN THIS LOAD UNTIL A ROLL DISTANCE OF 2300 FEET HAS BEEN COVERED.

(4) THERE SHALL BE 30 CYCLES OF THE ABOVE TEST COMPLETED AT 10° CAMBER INBOARD AND 30 CYCLES AT 10° CAMBER OUTBOARD.

2. THE TREAD PATTERN SHALL HAVE A MINIMUM OF FOUR GROOVES WHICH SHALL BE WITHIN THE CONTACT AREA OF THE STATIC LOAD FOOTPRINT TAKEN AT 60% OF THE MAXIMUM STATIC LOAD AND RATED INFLATION PRESSURE. THESE GROOVES SHALL BE CONTINUOUS AND CIRCUMFERENTIAL WITH A MOLD SKID DEPTH AS SPECIFIED ABOVE. A FULL SIZE TIRE FOOTPRINT CONFORMING TO THE APPLICABLE REQUIREMENTS OF SPEC MIL-T-5041 SHALL BE TAKEN AT RATED INFLATION PRESSURE AND 60% OF THE MAXIMUM STATIC LOAD AND SUBMITTED IN THE QUALIFICATION TEST REPORT. THE MOLD GROOVE WIDTH SHALL BE A MINIMUM OF .25 INCHES MEASURED AS SHOWN IN DETAIL C. AND INDICATED IN THE OTR. THE MAXIMUM CENTER RIB WIDTH OF THE UNINFLATED TIRE SHALL NOT EXCEED 3 3/4 INCHES.

3. ALL IDENTIFICATION MARKINGS OF THE ORIGINAL TIRE WILL BE MAINTAINED AND THE REBUILT TIRE WILL ALSO BE MARKED AS REQUIRED BY MIL-R-7726.

APPROVED 12 OCT 1973 REVISED (A) 28 SEPT 1977

*U.S. GOVERNMENT PRINTING OFFICE: 1977-703 122/6367

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. 99 Other Cust NAVY-AS	TITLE TIRE-PNEUMATIC REBUILT, TYPE VII 20.00-20/26 PR	MILITARY STANDARD MS 27823
PROCUREMENT SPECIFICATION MIL-R-7726	SUPERSEDES: AF DWG NO. 68D29335	SHEET 2 OF 2

DD FORM 1 JAN 68 672-1 (Limited coordination) EDITION OF 1 SEP 67 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.