
FED. SUP CLASS. 4730

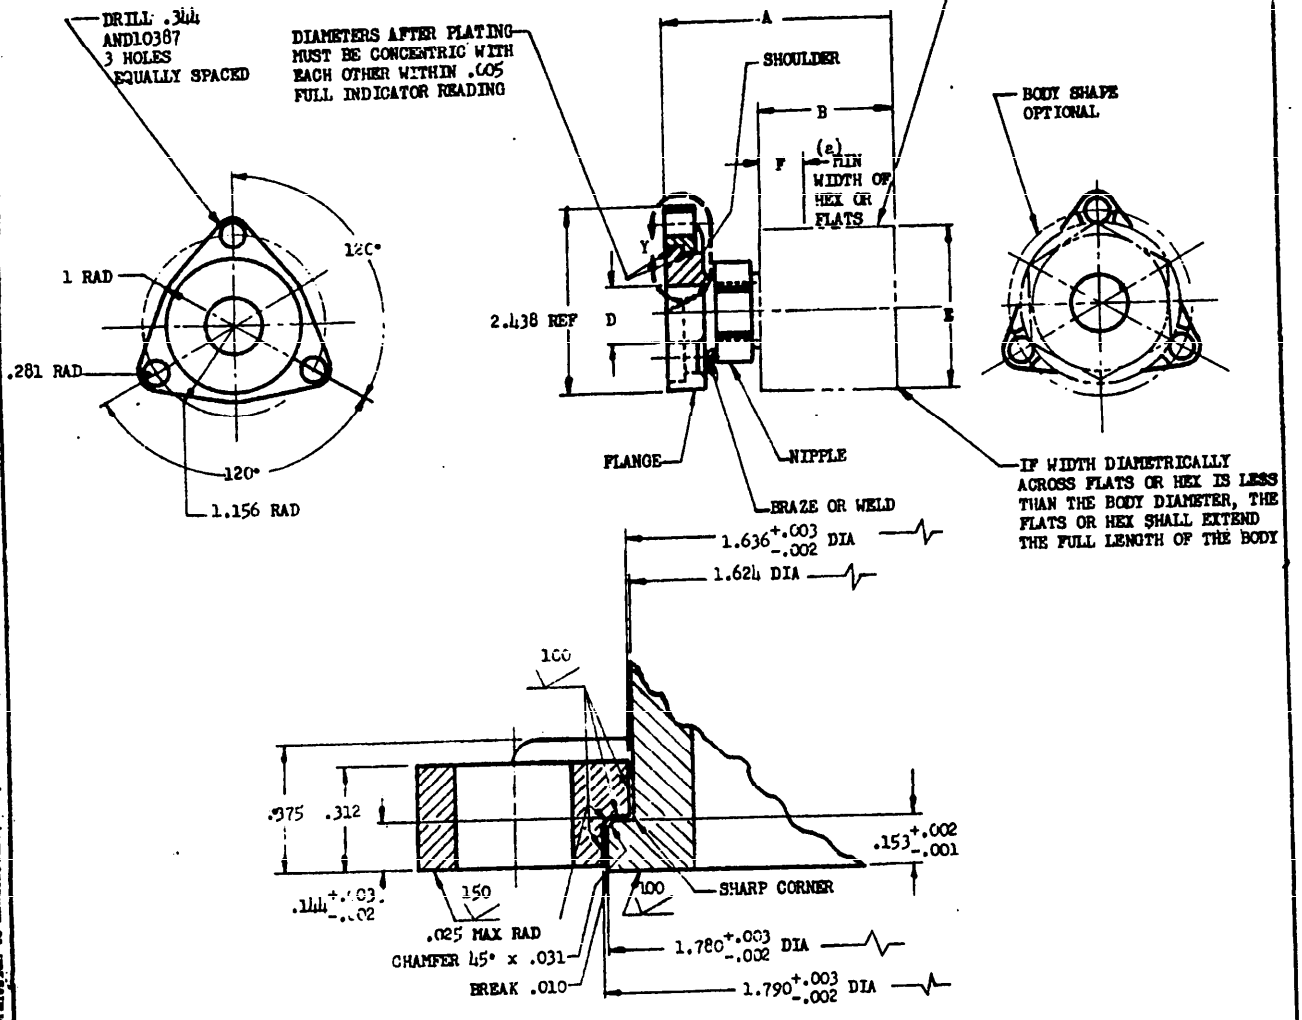

DETAIL SECTION Y

	MS PART NO.	TUBING OD	A MAX	B MAX	D DIA	E MAX DIA	F	WTS LBS APPROX
	MS28742-16	1.000	2.781	1.656	.815	1.562	.375	.562
	MS28742-20	1.250	2.875	1.750	1.047	1.906	.500	.693
(b)	~~MS28742-24~~	~~1.500~~	~~2.906~~	~~1.844~~	~~1.281~~	~~2.188~~	~~.625~~	~~.798~~

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) PART NO.MS28742-24 INACTIVE FOR DESIGN AFTER 24 SEPTEMBER 1951. NO SUPERSEDING MS STANDARD.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

(B) MATERIAL: FLANGE: STEEL 1022 FORGING, SPECIFICATION MIL-S-7097.
NIPPLE AND SHOULDER: STEEL 1335, SPECIFICATION QQ-S-671. SEE PROCUREMENR SPECIFICATION.
SOCKET: AL ALLOY, 24ST, SPECIFICATION QQ-A-354, CONDITION T.

FINISH: STEEL: CADMIUM PLATE, SPECIFICATION QQ-P-416, OR ZINC PLATE, SPECIFICATION QQ-Z-325.
AL ALLOY: ANODIC FILM SPECIFICATION MIL-A-8625.

(B) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.

FOR ACCEPTABLE PRODUCTS, SEE QUALIFIED PRODUCTS LISTS QPL-5070-1.

(B) THE MS PART NO. AND THE MANUFACTURERS NAME OR TRADE-MARK SHALL BE PERMANENTLY MARKED ON THE NIPPLE.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

INACTIVE FOR DESIGN AFTER 22 MAY 1953. SEE DRAWING MS28748.

APPROVED 24 Sep 51 REVISED (A) 22 May 53 (B) 1 Jul 54

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN: Navy - BuAer, Air Force

PROCUREMENT SPECIFICATION

MILITARY STANDARD

FITTING END - HOSE, SWIVEL, DETACHABLE, FLANGED, 3 BOLT, STRAIGHT

MS28742

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.