FED SUP CLASS
5935



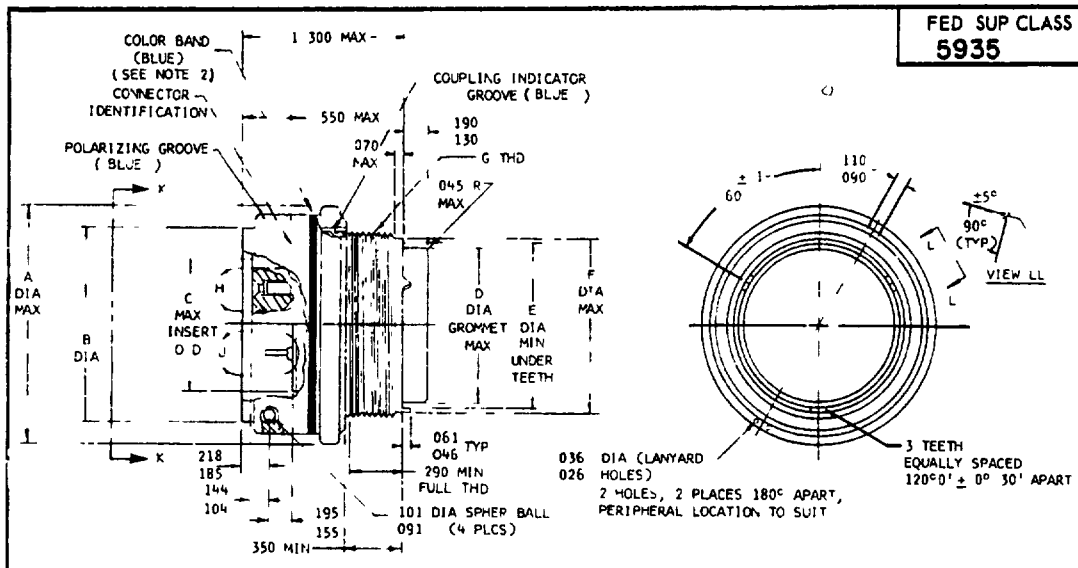



FIGURE 1
CONNECTOR VIEW

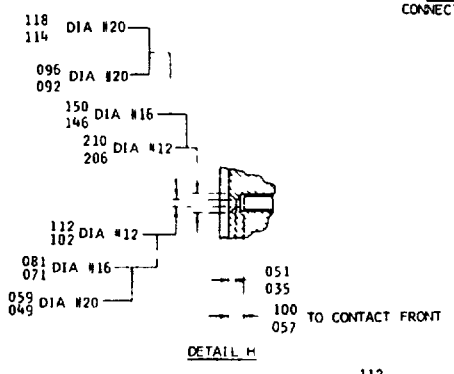

DETAIL H



VIEW KK

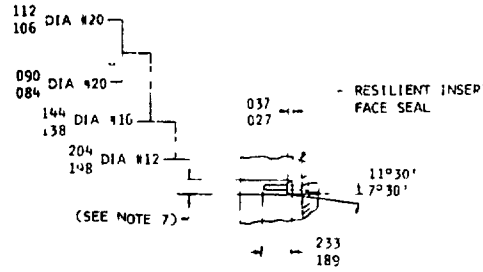

DETAIL J

ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR SOCKET CONTACT CHAMFER LEAD-INS AND PIN CONTACT RAISED SEAL BARRIERS		
SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5, 6, 8, 9, 11 AND 12

PART NUMBER

EXAMPLE MS3467 L 19 - 50 P B

- MS NUMBER
- CLASS
- SHELL SIZE
- INSERT ARRANGEMENT
- ALTERNATE INSERT POSITION
- CONTACT STYLE

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P A NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3467(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 1 OF 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-N668-11

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.


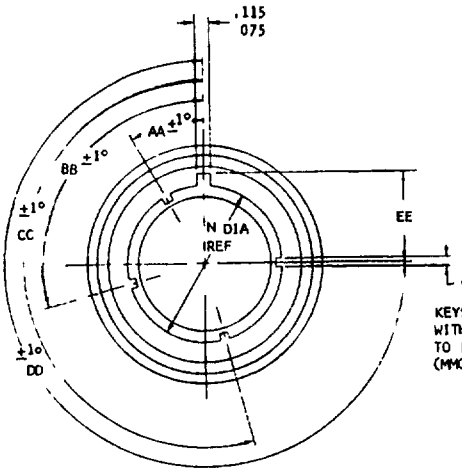


FIGURE II
KEY POSITIONS

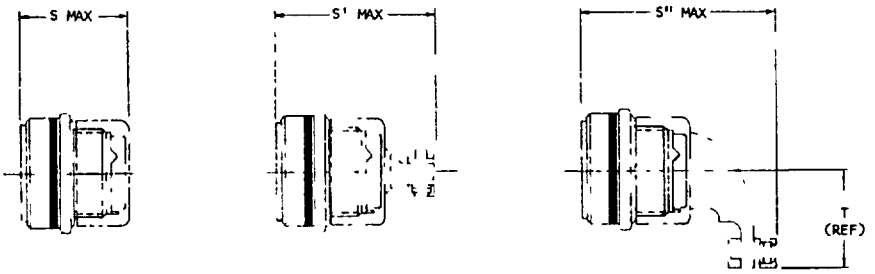


ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF (SEE NOTE 3)

ASSEMBLED TO STRAIGHT BACKSHELL WITH STRAIN RELIEF (SEE NOTE 3)

ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF (SEE NOTE 3)

FIGURE III
BACKSHELL ACCESSORIES

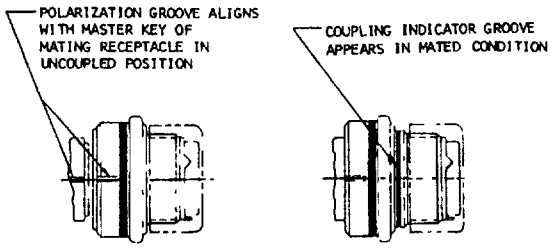

UNCOUPLED POSITION

COUPLED POSITION

FIGURE IV
COUPLING DETAILS

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS3467(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 2

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

TABLE I

CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	E	F	G THREAD	H	N	P
3	.805	.657/.648	.330	.351	.441	.509	9/16-24 UNEF-2A	30°	.454/.446	.405/ 398
7	.937	.793/.782	.451	.531	.613	.687	3/4-20 UNEF-2A	22° 30'	.589/.581	.540/.533
12	1.065	.942/.932	.553	.665	.731	.812	7/8-20 UNEF-2A	22°30'	.723/.715	.675/.668
19	1.245	1.073/1.063	.738	.790	.861	.937	1-20 UNEF-2A	22°30'	.862/.854	.813/.806
27	1.423	1.226/1.216	.854	.869	.919	.992	1 1/16-18 UNEF-2A	22°30'	1.017/1.009	.968/.961
37	1.558	1.348/1.338	.978	.994	1.044	1.117	1 3/16-18 UNEF-2A	22°30'	1.139/1.131	1.090/1.083
61	1.865	1.614/1 604	1.271	1.280	1.361	1.427	1 1/2-18 UNEF-2A	22°30'	1.427/1.419	1.378/1.371

SHELL SIZE	S	S'	S"	T
3	1.569	1.919	2.127	.850
7	1.569	1.919	2 327	.950
12	1.569	2.154	2.407	1.010
19	1.569	2.154	2.540	1.070
27	1.569	2.154	2.668	1.130
37	1.569	2.154	2.784	1.190
61	1.569	2.154	3.046	1 335

SHELL SIZE	* WEIGHT MAX (LBS)	
	PIN INSERT	SOC INSERT
3	.0311	.0319
7	.0415	.0429
12	.0518	.0540
19	.0639	.0686
27	.0801	.0864
37	.0942	.1002
61	.1402	.1542

*WEIGHT LISTED IS FOR CONNECTOR WIT MAX DENSITY INSERT ARRANGEMENT LESS CONTACTS AND BACKSHELL ACCESSORIES.

TABLE II

KEY POSITIONS

SIZE	AA	BB	CC	DD	EE
3	23°	97°	187°	--	.31/.29
7	23°	97°	187°	277°	.37/ 35
12	30°	105°	195°	270°	44/.42
19	30°	105°	195°	270°	.51/.49
27	30°	105°	195°	270°	.59/.57
37	30°	105°	195°	270°	65/.63
61	30°	105°	195°	270°	.79/ 77

NOTES

1. THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTOR DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF MIL-C-81703
2. COLOR BAND .100 WIDE MAX. BAND LOCATION MUST BE SUCH THAT IT IS VISIBLE WHEN THE CONNECTOR IS MATED.
3. CONNECTOR ASSEMBLY MUST INCLUDE A BACKSHELL TO MEET THE MOISTURE SEALING REQUIREMENTS OF THE PROCUREMENT DOCUMENT. SEE MS 3416, MS 3417 AND MS 3418 FOR APPLICABLE BACKSHELL ACCESSORIES.
4. MATERIALS SHELLS 6061-T6 PER QQ-A-367
   COUPLING RINGS ALUMINUM ALLOY.
5. THE FINISH ON THE SHELLS AND COUPLING RINGS SHALL BE ELECTROLESS NICKEL.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR TOLERANCE, X° ±1°-0' AND X°X' ±30'.
7. DIAMETERS SHOWN ARE AT BASE OF BARRIERS.

APPROVED 21 July 1977 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P A NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, PUSH PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS3467(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

☆U S GOVERNMENT PRINTING OFFICE 1976-703-020/654

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.