INCH-POUND

MS35436C
15 December 2003
SUPERSEDING
MS35436B
10 February 1961


DETAIL SPECIFICATION SHEET

TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, INSULATION GRIP, ONE HOLE

Inactive for new design after 15 December 2003

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15659 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

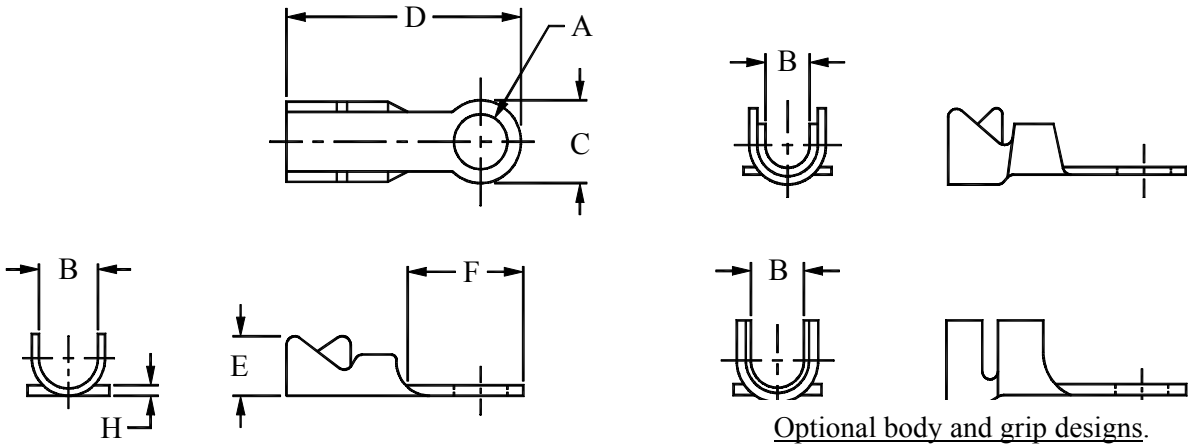

Optional body and grip designs.

FIGURE 1. Terminal dimensions for -1 through -29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions for -1 through -29.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D	E	F	H ±0.003
			Min.	Max.						
1	18-20	1/4	0.258	0.285	1/8	15/32	55/64	15/64	35/64	0.032
2		5/16	0.320	0.347						
3	14-16	4	0.115	0.127	3/16	9/32	57/64	5/16	25/64	
4		6	0.141	0.153		11/32	63/64		31/64	
5		8	0.167	0.179						
6		10	0.193	0.205						
7		1/4	0.258	0.285		9/16	1 5/32		21/32	
8		5/16	0.320	0.347		11/16	1 3/8		27/32	
9		3/8	0.383	0.410						
10	10-12	8	0.167	0.179	1/4	11/32	63/64	25/64	31/64	0.040
11		10	0.193	0.205						
12		1/4	0.258	0.285		9/16	1 5/32		21/32	
13		5/16	0.320	0.347		11/16	1 11/32		25/32	
14		3/8	0.383	0.410			1 3/8		27/32	
15		7/16	0.448	0.475			1 15/32		31/32	
16		1/2	0.510	0.537		13/16	1 9/16		1 1/32	
17	8	10	0.193	0.205	5/16	9/16	1 13/32	29/64	19/32	0.045
18		1/4	0.258	0.285					21/32	
19		5/16	0.320	0.347		11/16	1 17/32		25/32	
20		3/8	0.383	0.410		13/16	1 5/8		29/32	
21		7/16	0.448	0.475			1 23/32		1 1/32	
22	4-6	10	0.193	0.205	3/8	9/16	1 11/32	9/16	21/32	
23		1/4	0.258	0.285			1 13/32		23/32	
24		5/16	0.320	0.347			1 15/32		25/32	
25		3/8	0.383	0.410		13/16	1 5/8		29/32	
26		7/16	0.448	0.475			1 23/32		1 1/32	
27		1/2	0.510	0.537		15/16	1 13/16		1 3/32	
28	0-1	3/8	0.383	0.410	7/16	15/16	2 15/32	45/64	-	0.102
29		1/2	0.510	0.537					-	

[1]American Wire Gauge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

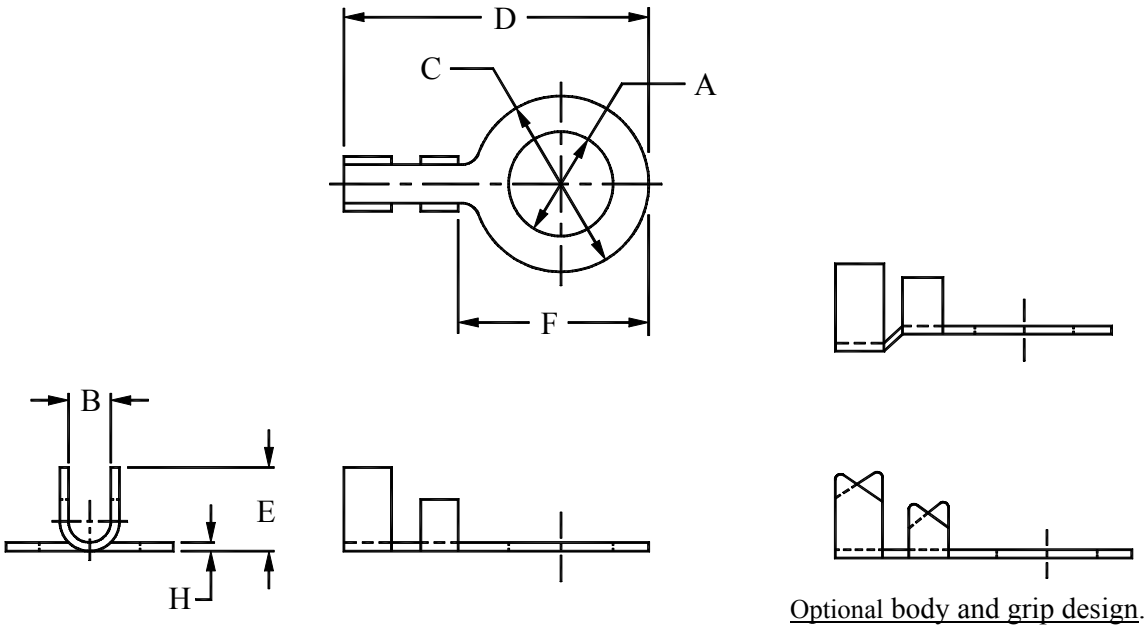


FIGURE 2. Terminal dimensions for -30 through -43.

TABLE II. Dash numbers and dimensions for -30 through -43.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D	E	F	H
			Min.	Max.						
30	10	6	0.141	0.153	1/8	9/32	21/32	7/32	21/64	0.032
31	8				5/32	11/32	1	9/32	15/32	0.025
32		8	0.167	0.179						
33		10	0.193	0.205						
34		3/8	0.383	0.410		11/16	1 7/32			
35	6	6	0.141	0.153	3/16	1/2	1 3/32	1/4	19/32	0.032
36		8	0.167	0.179						
37		10	0.193	0.205						
38		1/4	0.258	0.285						
39	4	6	0.141	0.153	7/32	1/2	1 3/32	11/32	19/32	0.040
40		8	0.167	0.179						
41		10	0.193	0.205						
42		12	0.221	0.236						
43		1/4	0.258	0.285						

[1]American Wire Gauge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

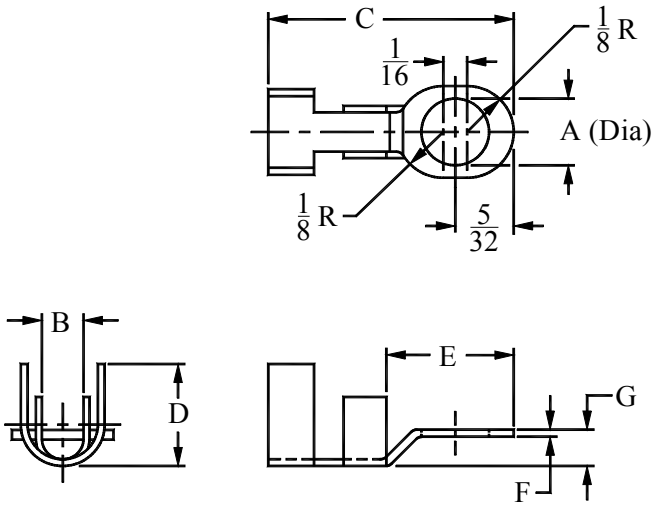


FIGURE 3. Terminal dimensions for -44.

TABLE III. Dash numbers and dimensions for -44.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D	E	F ±0.003	G
			Min.	Max.						
44	12	6	0.141	0.153	3/32	11/16	9/32	11/32	0.030	5/64

[1]American Wire Gauge.

REQUIREMENTS:

1. Material: Electrolytic copper strip or sheet alloy C11000, temper O60 in accordance with ASTM B 152/B 152M (DoD adopted).


2. Finish: Tinned; electrodeposited over entire surface in accordance with ASTM B 545 (DoD adopted). Minimum thickness 0.0005 inches all over.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±1/64.
3. Remove all burrs.
4. Referenced documents of issue in effect on date of invitation for bids shall apply.
5. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.

6. The part or identifying number (PIN) consists of the letters MS, the specification sheet number, and a dash number taken from table I, II, or III.

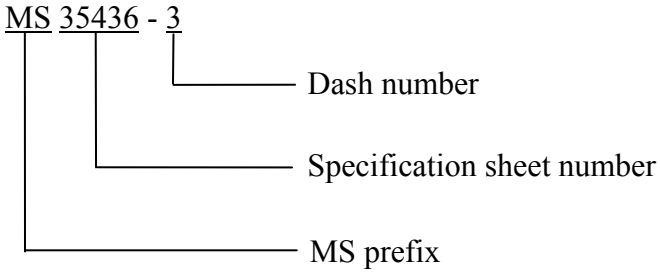

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force -11

Preparing Activity:
DLA - GS2

(Project 5940-1435)

Review Activities:
Army - MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.