
FED. SUP CLASS
2320

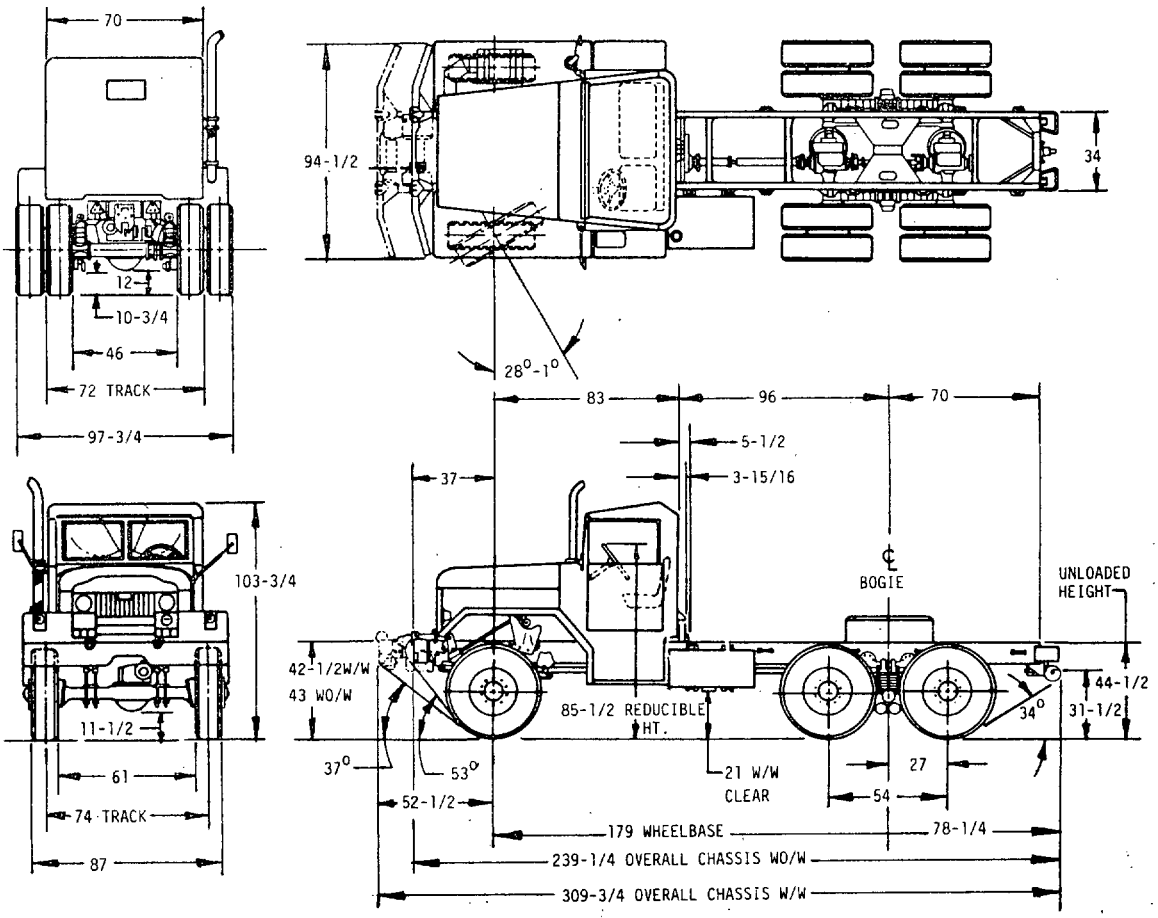

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS500092 -1	8736512	WITH WINCH
MS500092 -2	8736511	LESS WINCH

APPROVED 27 MAY 1968 REVISED © 20 MAY 85

© ENTIRE STANDARD REVISED

P.A. ARMY-AT
Other Cust

TITLE CHASSIS, TRUCK, 5 TON, 6X6,
179 INCH WHEELBASE, M40A2

MILITARY STANDARD
MS500092(AT)

PROCUREMENT SPECIFICATION
MIL-T-740

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T20:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS LESS PAYLOAD AND PERSONNEL

	W/W	WO/W
FRONT AXLE	8570 LBS	7590 LBS
REAR BOGIE	9180 LBS	9300 LBS
	17750 LBS	16890 LBS

PAYLOAD: LOADED 12500

GROSS WEIGHT: FULLY EQUIPPED, BODY, PLUS PAYLOAD AND PERSONNEL

	W/W	WO/W
FRONT AXLE	9930	8950
REAR BOGIE	30870	30990
TOTAL	40800	39940

TOWED LOAD: LOADED 15000 LBS

MINIMUM TURNING RADIUS: OVER BUMPER
- WITH WINCH 500 IN
- WITHOUT WINCH 494 IN

*FORDING DEPTH
- WITH KIT 78 INCHES
- WITHOUT KIT 30 INCHES

POWER PLANT: INST'N 10938275-1
- ENGINE LDS465-1A 10951400
- SIX CYLINDERS IN LINE
- DISPLACEMENT 478 CU IN
- BORE 4.56 STROKE 4.87
- COMPRESSION RATIO 22:1
- GOVERNED SPEED 2800 RPM
- MAXIMUM GROSS H P 210 NET 198 @ 2800 RPM
- MAXIMUM GROSS TORQUE 450 NET 440 @ 2000 RPM
- COOLING SYSTEM CAPACITY 38 QTS
- PUMP DRIVE TWO V BELTS
- FAN, ENGINE COOLING SIX BLADE
- FUEL TANK INST'N 10938398
- EXHAUST SYSTEM INST'N 11593176
- CLUTCH 8675958
- CLUTCH INST'N 10871497
- RADIATOR THICKNESS 2.88

TRANSMISSION ASSEMBLY: W/W 8333627
- TYPE SYNCHROMESH
- FORWARD SPEEDS, FIVE REVERSE, ONE
- GEAR RATIOS: 7.31, 4.09, 2.41, 1.44, 1.00
- REVERSE 7.33

TRANSFER TRANSMISSION: INST'N 10899367
- TRANSFER TRANSMISSION WO/PTO 7748580
- GEAR RATIO: HIGH 1.00:1 LOW 2.024:1

FRONT SUSPENSION INST'N 10871261
- FRONT AXLE 7346805
- FRONT SPRINGS 7409345
- SHOCK ABSORBERS 7409617

REAR SUSPENSION: INST'N 10883209
- REAR AXLE ASSEMBLY TWO 8327007
- REAR SPRINGS TWO 7409613
- TORQUE ROD ASSEMBLY SIX 8728126

FRAME ASSEMBLY: 10938415
- SIDE RAIL 9 X 3 X 5/16
- SECTION MODULUS 10.7 INCHES^3
- FRONT BUMPER AND LIFTING SHACKLES W/W 10883120, WO/W 10883138
- REAR BUMPER AND LIFTING SHACKLES 10883121

WINCH: 7412382 10871078
- WINCH CAPACITY 20,000 LBS MS51353-1

TIE DOWNS: "U" BOLTS SIXTEEN 10883223
- LOCATION, EIGHT EACH SIDE

WHEELS: INC, RING MS53044-6
- SIZE 20 X 7-1/2 OFFSET 6-11/16
- RING MS53045-3

MIRROR, REAR VIEW: ASSEMBLY 11611649
- REAR VIEW MIRROR, RH 11611649-1
- REAR VIEW MIRROR, LH 11611649-2

TIRES: TEN PLUS ONE SPARE MS35388-21
- SIZE 11 X 20 12-PLY
- TREAD NDCC

TUBES: ZZ-I-550E/G2/11.00-20.00/TR78A/ON CTR

MISCELLANEOUS EQUIPMENT:
- CAB INST'N 10883240-1
- CAB ASSEMBLY, SOFT TOP 10883174-1
- TRUCK FRONT END INST'N 10938339
- STEERING 8728230 INST'N 8758369
- RUNNING BOARD AND BATTERY BOX INST'N 10883279
- RUNNING BOARD AND TOOL BOX INST'N 10871471-8
- INSTRUMENT PANEL INST'N 10938210-9
- TACHOMETER INST'N 10938366
- SPEEDOMETER INST'N 10883378
- THROTTLE LINKAGE INST'N 10938349-1
- AIR CLEANER INST'N 10938336
- PROPELLER SHAFT INST'N 10883412
- "HI-DEFLEC." SEAT INST'N 11593200

PINTLE: INST'N 10883506
- PINTLE HOOK 30,000 LBS MS51117-1

AIR AND HYDRAULIC TUBING INST'N 10938410-1

BRAKE, SERVICE DRUM: 7409394
- DRUM SIZE 16-1/2 X 5-1/2

BRAKE, PARKING: CONTROL INST'N 11608801-1
- DRUM SIZE 14 X 3

ELECTRICAL SYSTEM:
- WIRING INST'N 10938386-2
- POTENTIAL 24 VOLT
- STARTING MOTOR 10911018-1
- BATTERIES TWO 12 VOLT 6TN MS35000-4
- ALTERNATOR, 60 AMPS 10929868
- LIGHTING, HEAD LAMPS 8741462
- BLACK OUT DRIVING LAMP MS51318-1
- COMPOSITE LIGHT, TAIL MS52125
- COMPOSITE LIGHT, FRONT MS52126

TRAILER COUPLING SOCKET: 7731429

REFLECTORS: RED MS35387-1, AMBER MS35387-2

PERFORMANCE:
- FUEL TANK CAPACITY 78 GAL

FUEL	MPG	CRUISING RANGE
DIESEL	5.3	350 MILES
CIE	4.83	319 MILES
GASOLINE	4.39	290 MILES

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
- *4. SUBJECT OF NATO STANAG 2805-A(EDITION 3). DO NOT REVISE OR CHANGE.

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS500092 -1	8736512	WITH WINCH
MS500092 -2	8736511	LESS WINCH

APPROVED 27 MAY 1968 REVISED © 20 MAY 85

P.A. ARMY-AT
Other Cust

TITLE CHASSIS, TRUCK, 5 TON, 6X6, 179 INCH WHEELBASE, M40A2

MILITARY STANDARD
MS500092(AT)

PROCUREMENT SPECIFICATION
MIL-T-740

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.