
FED. SUP CLASS
2320

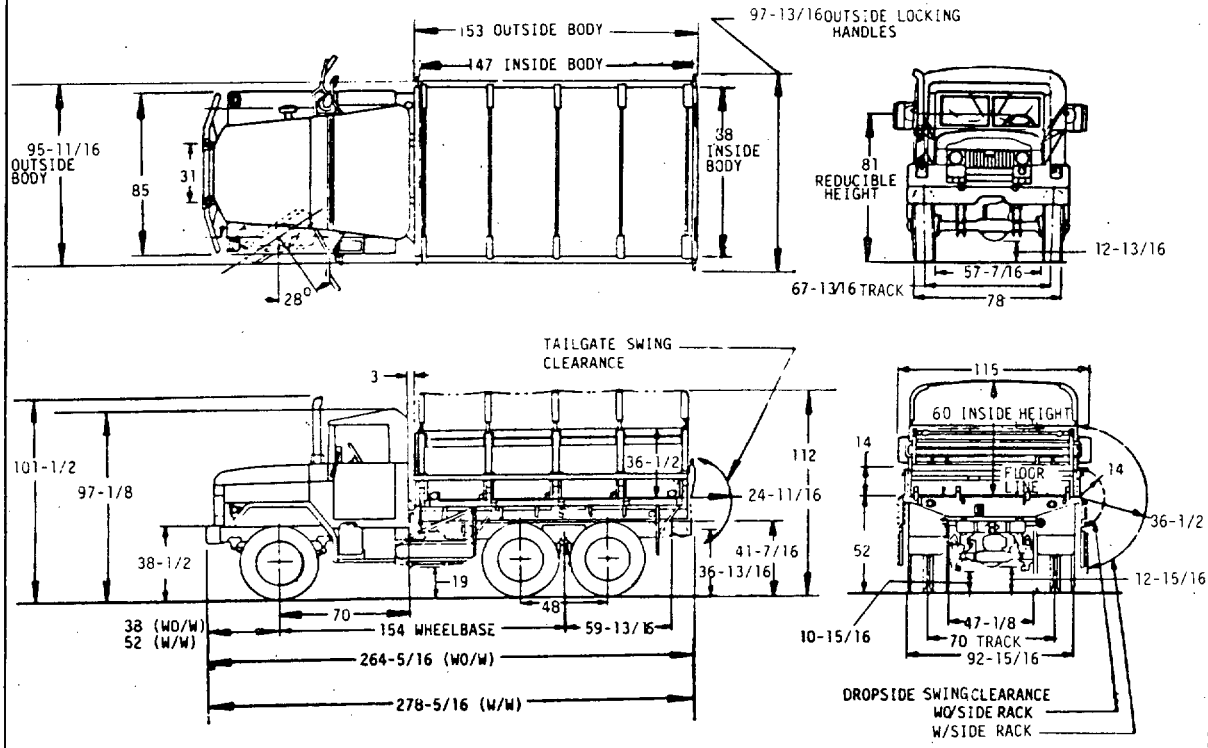

MS PART NO.	ENGINEERING DRAWING NO	
MS 52107-1	8736735	W/WINCH
MS 52107-2	8736733	WO/WINCH

© ENTIRE STANDARD REVISED

APPROVED 28 AUGUST 1969 REVISED © 10 APR 85

P.A. ARMY-AT Other Cust	TITLE TRUCK, CARGO; DROPSIDE, 2-1/2 TON, 6X6, 154 INCH WHEELBASE, MILITARY DESIGN, M35A2C	MILITARY STANDARD MS52107(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

FED. SUP CLASS 2320

WEIGHTS: WITHOUT CREW.

	WO/W EMPTY	LOADED	W/W EMPTY	LOADED
PAYLOAD		8000		8000
FRONT AXLE	6210		6865	
BOGIE	5320		5185	
TOTAL, LBS	11530		12050	
MAX. TOWED LOAD, LBS		6000		6000

CHASSIS: M45A2
WITH WINCH 8736575
WITHOUT WINCH 8736574

CARGO BODY: COMPLETE 10937903
CARGO BODY INST'N 10937455

GENERAL:
THIS IS USED TO TRANSPORT GENERAL CARGO AND PERSONNEL. THE CAB IS CANVAS-COVERED OPENTYPE. THE BODY IS 12.66 (147 X 88 IN. INSIDE) FLAT-TYPE, STEEL CONSTRUCTION. SIDES AND TARPAULIN FRAMES ARE REMOVEABLE .14 IN.SIDES, 19-3/8 IN.TAILGATE, 61 IN. FROM FLOOR TO UNDERSIDE OF BOWS, COMPLETE WITH SIDE RACKS, TARPS AND SEATS DROP-SIDES, REMOVABLE SIDE RACKS, TROOP SEATS, TARP BOWS, TARP END FLAPS, AND MARINE CORPS VEHICLE LIFTING FIXTURES ARE PROVIDED.

POWER PLANT: INST'N WO/W 11609245-4
W/W 11609245-5
INCLUDING RADIATOR AND TRANSMISSION
ENGINE, COMPLETE LDT-465-1C 11642105
ENGINE, BASIC, MULTIFUEL 11641990
SIX CYLINDERS, IN-LINE, DISPLACEMENT-478 CU. IN.
BORE - 4.56, STROKE - 4.88
COMPRESSION RATIO - 22:1, GOV. SPEED - 2600 RPM
MAXIMUM BHP - 130 NET 118 @ 2600 RPM
PROPELLER SHAFT INST'N 10871516

TRANSMISSION: ASSY: W/W 10872194
WO/W 10872096
TYPE, SYNCHROMESH
FORWARD SPEEDS, FIVE REVERSE, ONE
GEAR RATIOS;
FORWARD- 5.02:1, 2.78:1, 1.62:1, 1.00:1, 0.79:1
REVERSE - 4.90:1
TRANSFER AND CONTROLS INST'N 10937636
TRANSFER TRANSMISSION 11609224
RATIOS; HIGH - 1.00:1, LOW -1.98:1

FRONT SUSPENSION: INST'N 10872040
FRONT AXLE 7521734-1
FRONT SPRINGS 11601335
SHOCK ABSORBERS 7539007

REAR SUSPENSION: INST'N 8757725
REAR AXLE 8757644
REAR SPRINGS 7521792
TORQUE ROD ASSEMBLY 8757685

FRAME: COMPLETE 11609279
SIDE RAIL, 8 X 3 X 5/16
SECTION MODULUS, 8.9 CUBIC IN

ELECTRICAL SYSTEM:
CHASSIS INST'N 10896818
TRUCK INST'N 10896899
FLASHER, SOLID STATE 11613631
FLASHER, SOLID STATE 11613632
DRIVING LAMP ASSY. 8741462
DRIVING LAMP ASSY, B.O. 11668932
FRONT COMPOSITE LIGHT 11614156
REAR COMPOSITE LIGHT 11614157
ALTERNATOR ASSY. 11641980
ALTERNATOR 10929868
BRACKET, ALTERNATOR 10889930
STARTER 10911018
BATTERIES MS35000-4

AIR SYSTEM: INST'N 11647737

WHEELS: 7389620
SIZE, 20 X 7-1/2 OFFSET 6-1/4
RING, WHEEL MS53045-3 7389061
TIRES, NDCC MS35388-16
TUBES MS35392-13

CAB: ASSY REF 8757744
INST'N 10896757
HOOD AND FENDER
INST'N WO/W 11609236-2
W/W 11609237-2
RUNNING BOARD, BATT. BOX
INST'N 10871540
RUNNING BOARD, TOOL BOX
INST'N 10871541
MIRROR AND BRACKET ASSY 10937793
INSTRUMENT PANEL INST'N 10937450
TACHOMETER INST'N 10896303
SPEEDOMETER INST'N 10937442
STEERING INST'N 10897162
EXHAUST SYSTEM INST'N 11677097
FUEL SYSTEM INJECTION PUMP 10935264-2
CLUTCH 7748995
CLUTCH PEDAL INST'N 8757745

BRAKES: SERV. HYDRAULIC
INST'N 10937705-1
HUB AND DRUM ASSEMBLIES, 15 X 3
FRONT - L.H. 7529053 R.H. 7529054
REAR - L.H. 8757681 R.H. 8757682
HAND BRAKE INST'N 11609817
DRUM SIZE, 14 X 3
COMPRESSOR, AIR, ASSY. 10935609
MASTER CYLINDER, CONTROL
INST'N 10871533-1

FUEL SYSTEM: INST'N 10897080
CAPACITY, 50 GALLONS

PERFORMANCE: LOADED, W/O TOWED LOAD.
CRUISING RANGE, HIGHWAY 300 MILES
MAXIMUM SPEED, HIGHWAY 56 MPH

*FORDING KIT: 11609777
FORDING DEPTH, WO/KIT 30 IN
FORDING DEPTH, W/KIT 72 IN

MISCELLANEOUS EQUIPMENT:
TIE DOWNS, SEVEN EACH SIDE; TWO FRONT, TWO REAR
CLOSURE, HARDTOP 7354276
SHACKLES, REAR 7539662
WINCH INST'N 10872197
PINTLE 7722050-1

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
4. SUBJECT OF NATO STANAG 2805-A(EDITION 3). DO NOT REVISE OR CHANGE.

APPROVED 28 AUGUST 1969 REVISED © 10 APR 85

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO	
MS 52107-1	8736735	W/WINCH
MS 52107-2	8736733	WO/WINCH

P.A. ARMY-AT
Other Cust

TITLE
TRUCK, CARGO, DROPSIDE, 2-1/2 TON, 6X6, 154 INCH WHEELBASE, MILITARY DESIGN, M35A2C

MILITARY STANDARD
MS52107(AT)

PROCUREMENT SPECIFICATION
MIL-T-46780

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.